

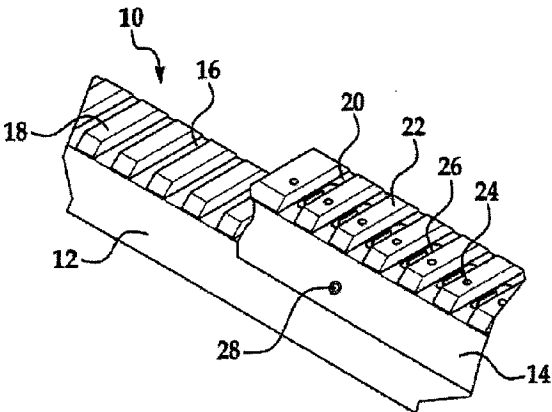


FIG. 1




FIG. 2

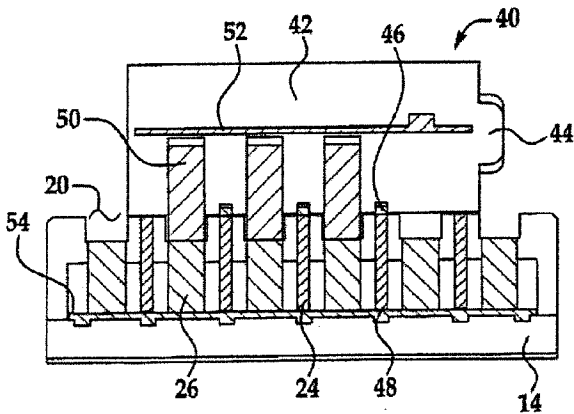


FIG. 3

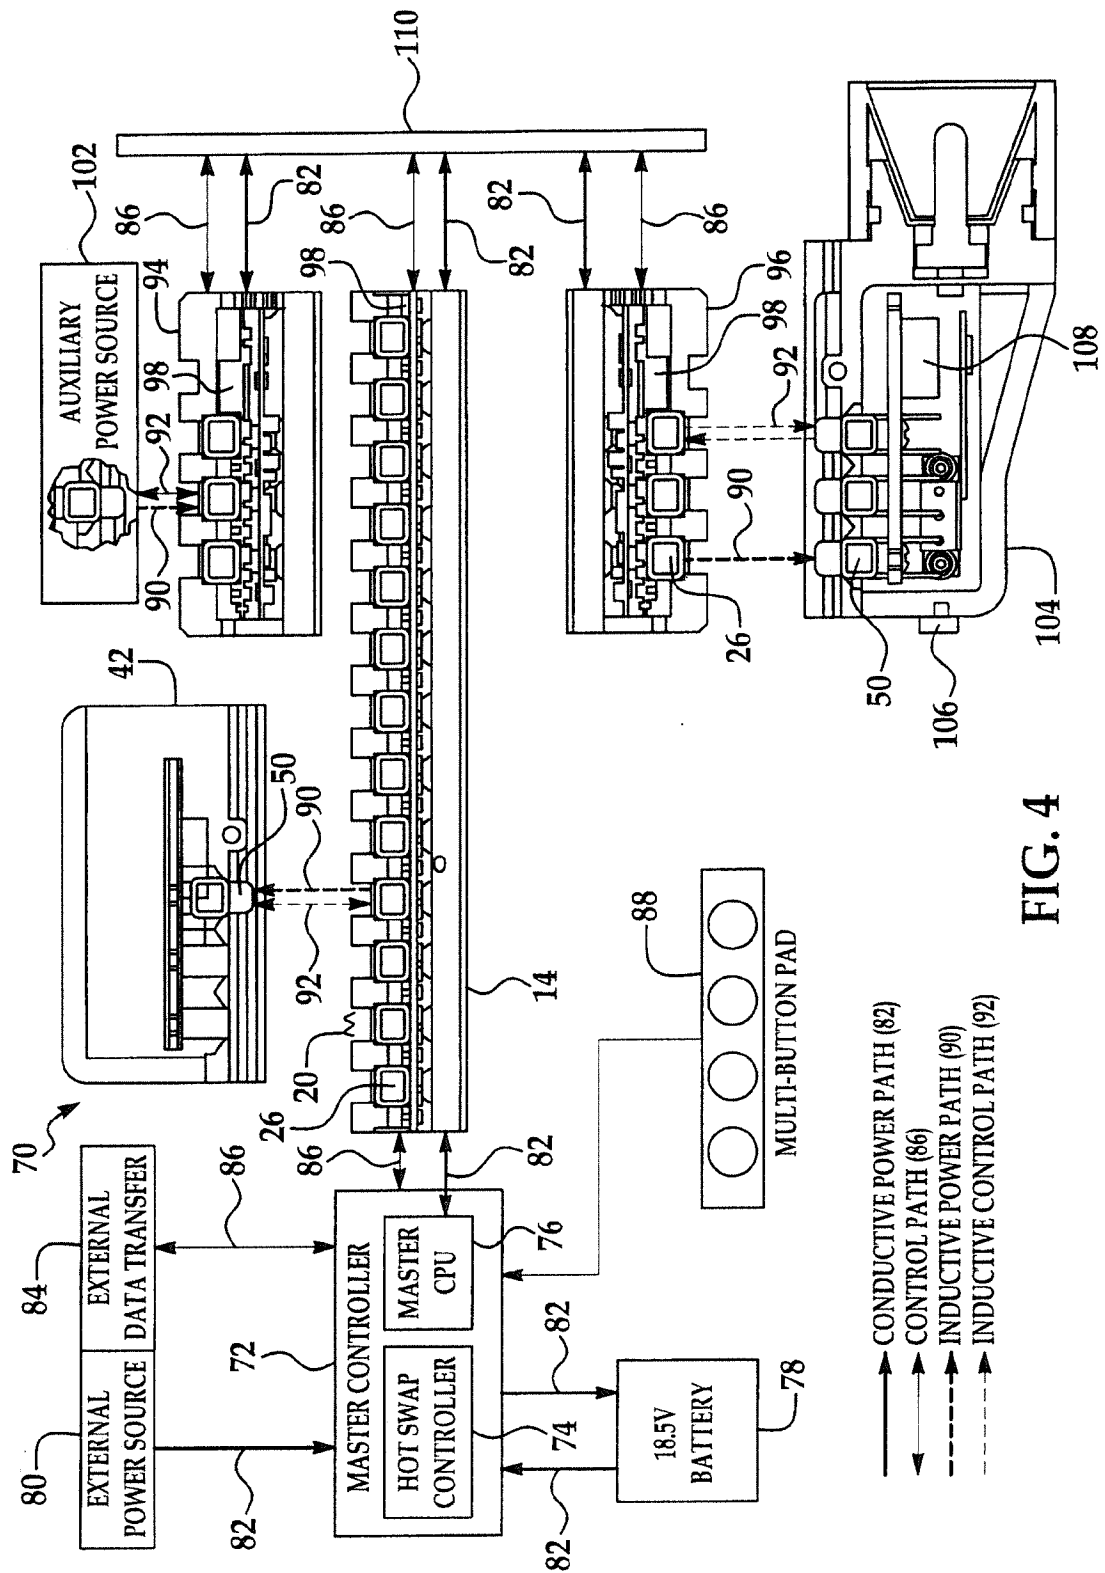


FIG. 4

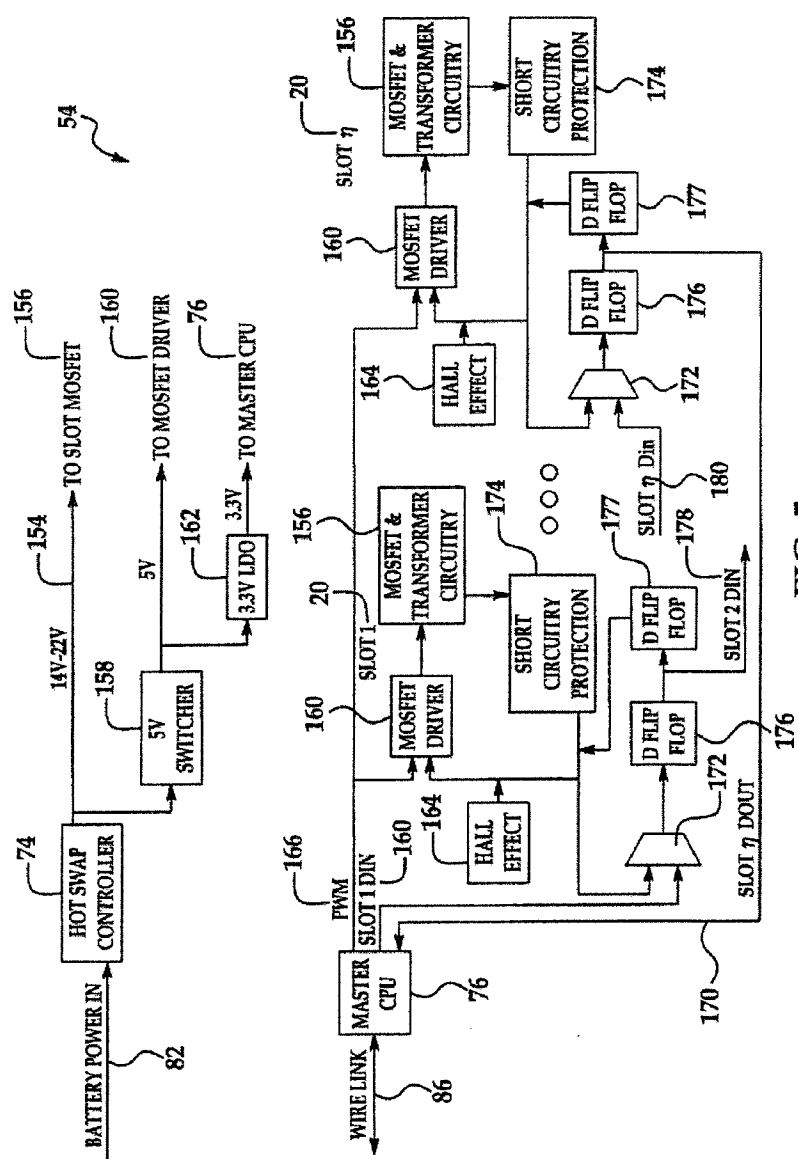


FIG. 5

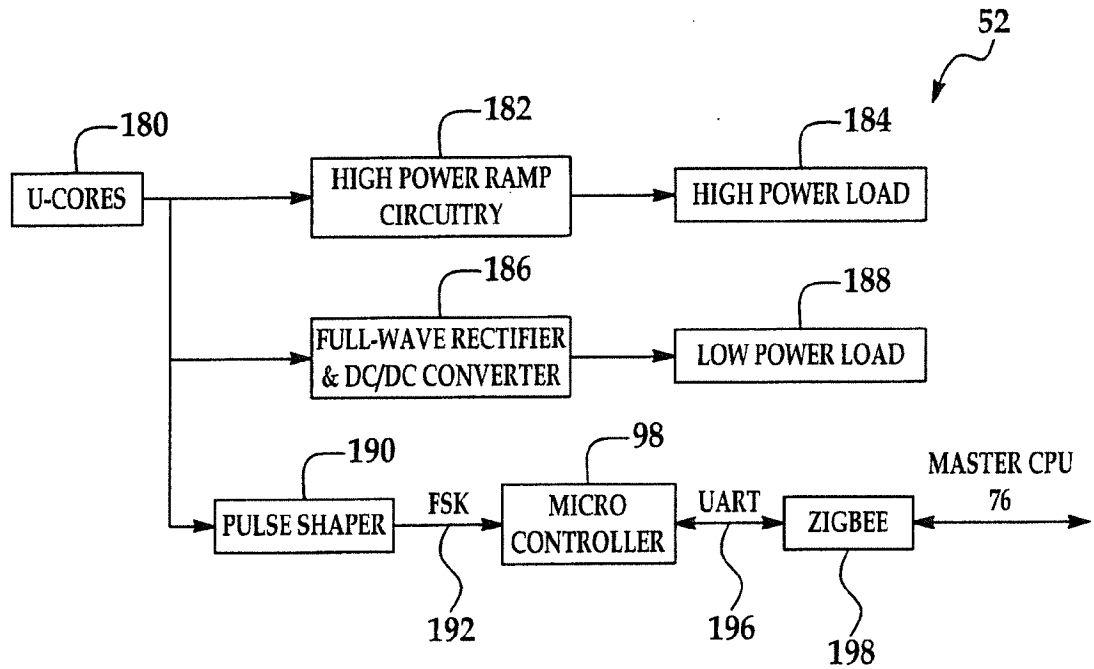


FIG. 6

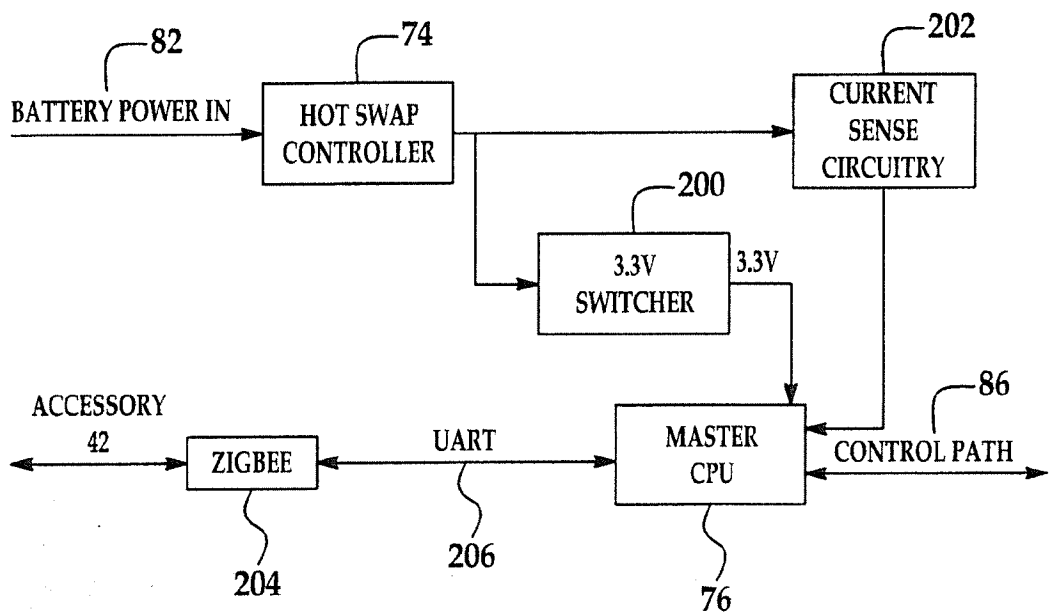


FIG. 7

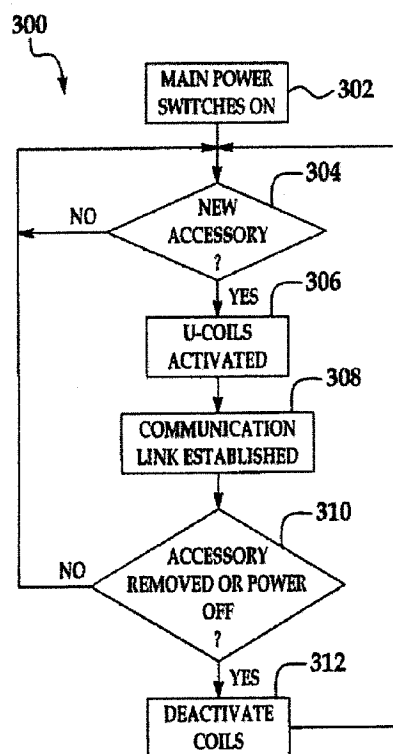


FIG. 8

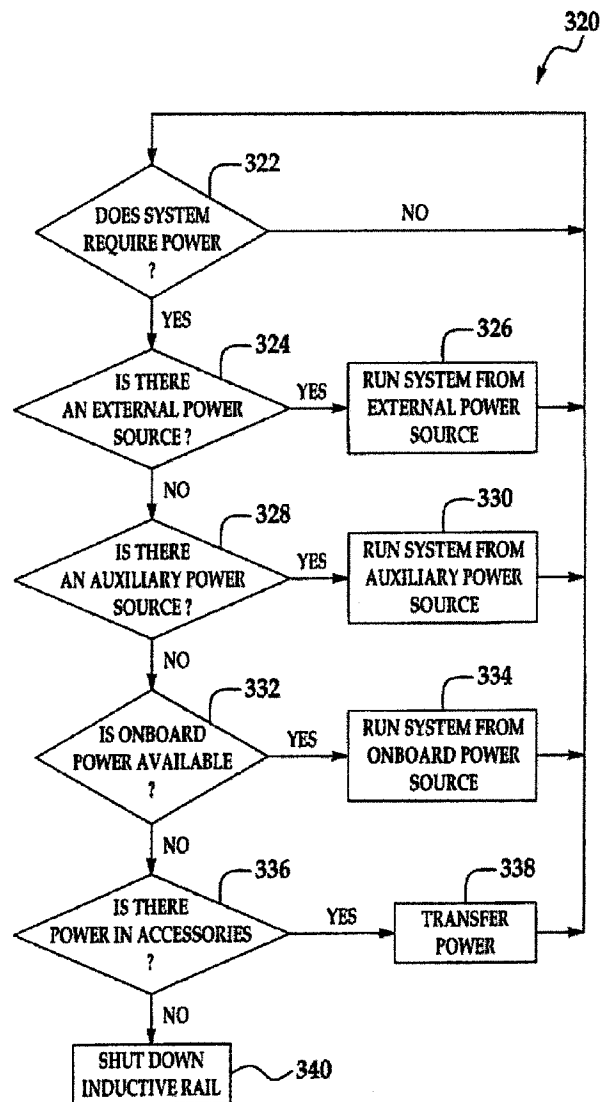


FIG. 9

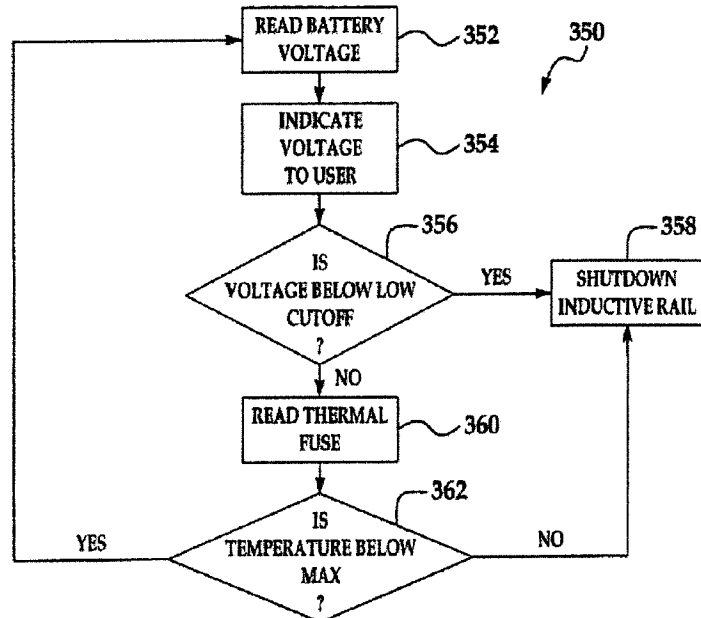


FIG. 10

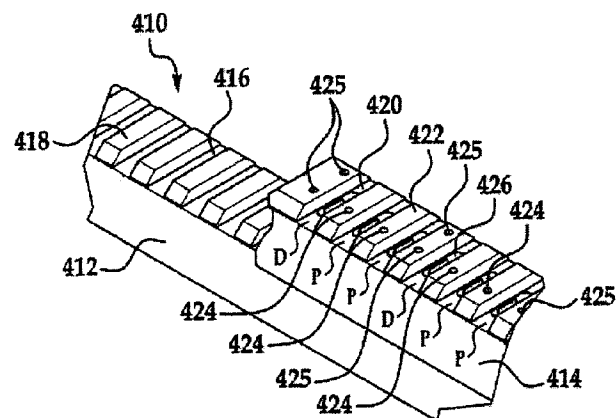


FIG. 11

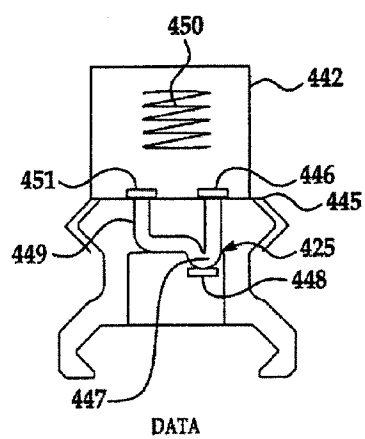


FIG. 12A

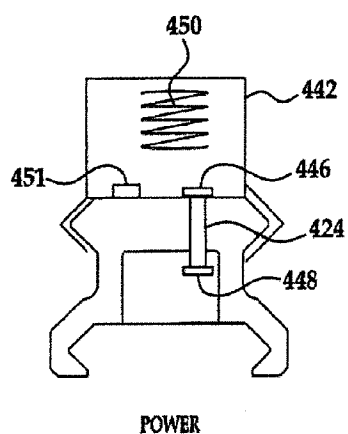


FIG. 12B

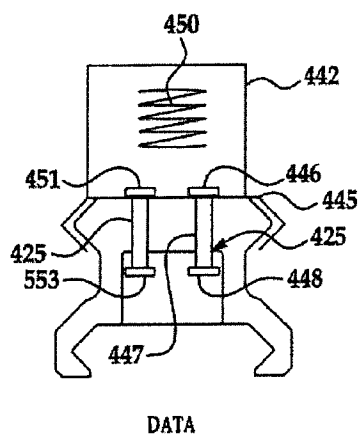


FIG. 12C

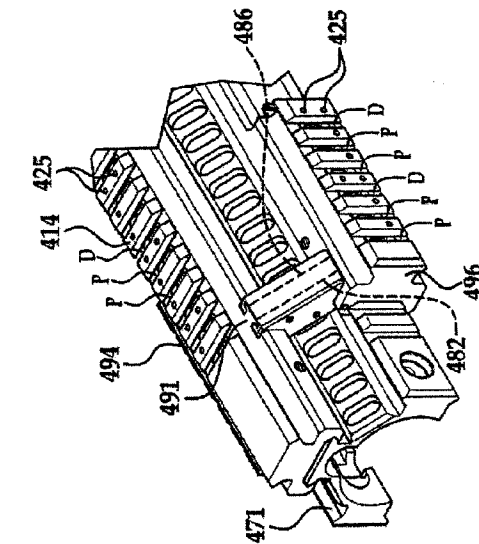


FIG. 13B

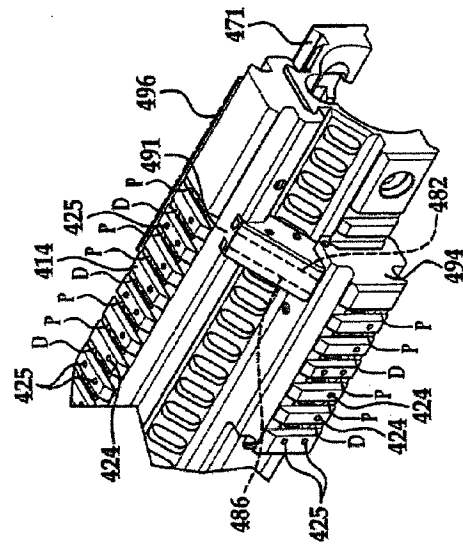


FIG. 13A

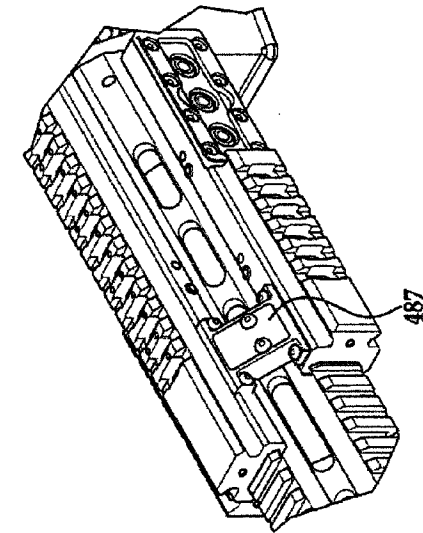


FIG. 13D

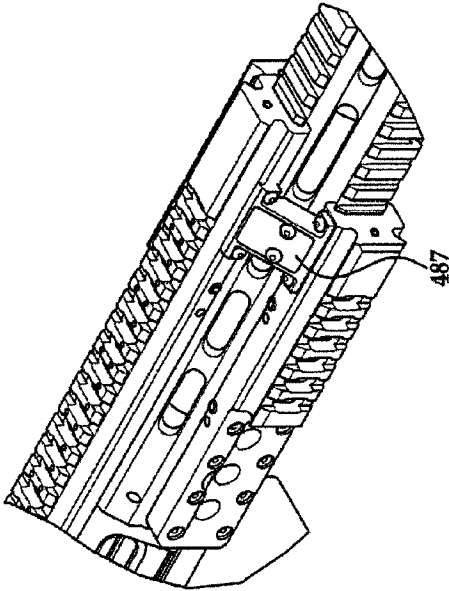


FIG. 13C

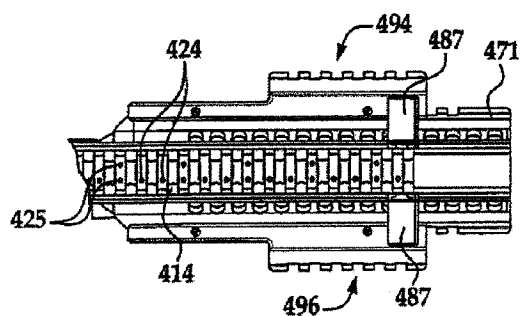


FIG. 14A

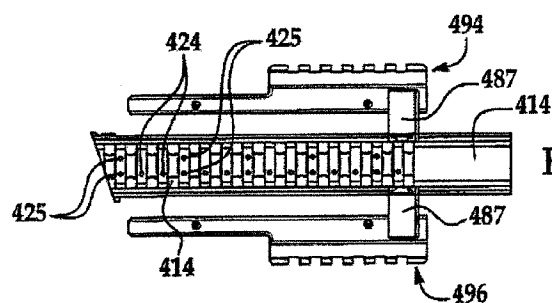


FIG. 14B

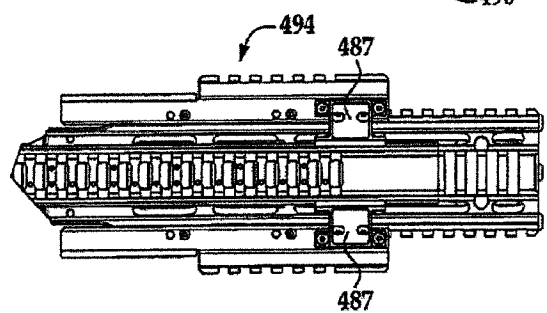


FIG. 14C

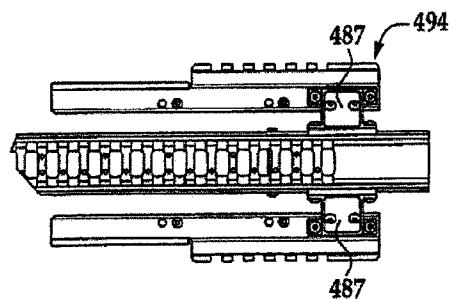


FIG. 14D

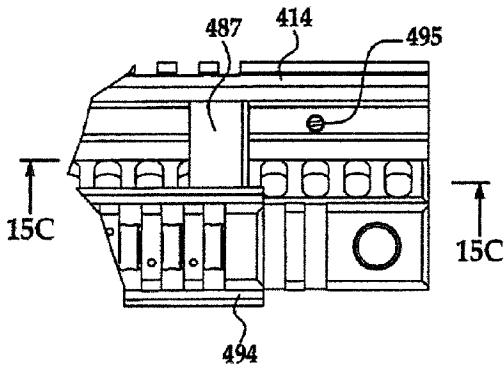


FIG. 15A

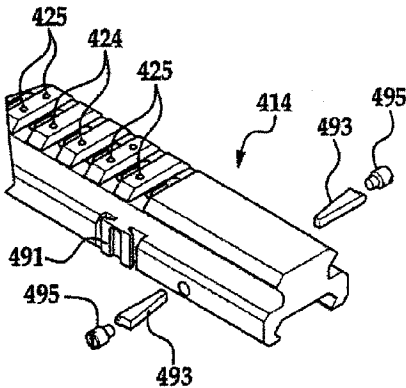


FIG. 15B

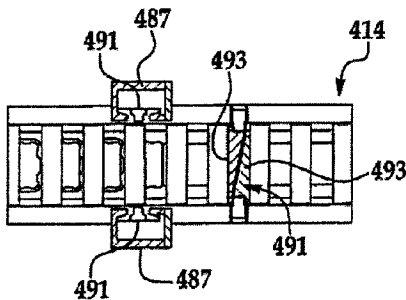


FIG. 15C

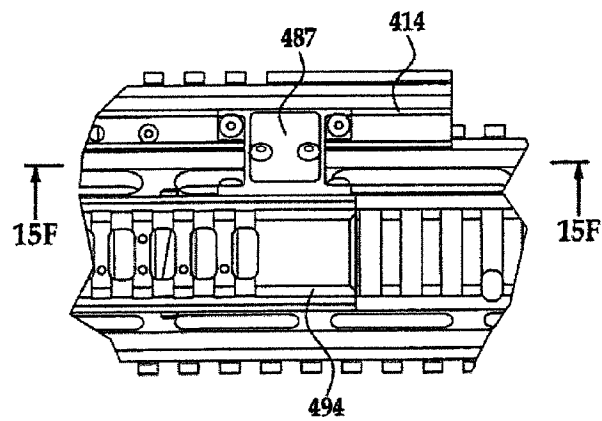


FIG. 15D

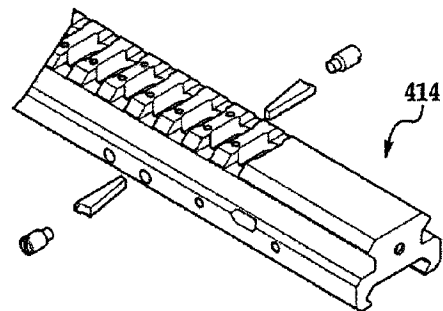


FIG. 15E

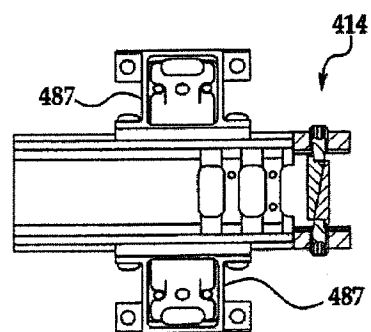


FIG. 15F

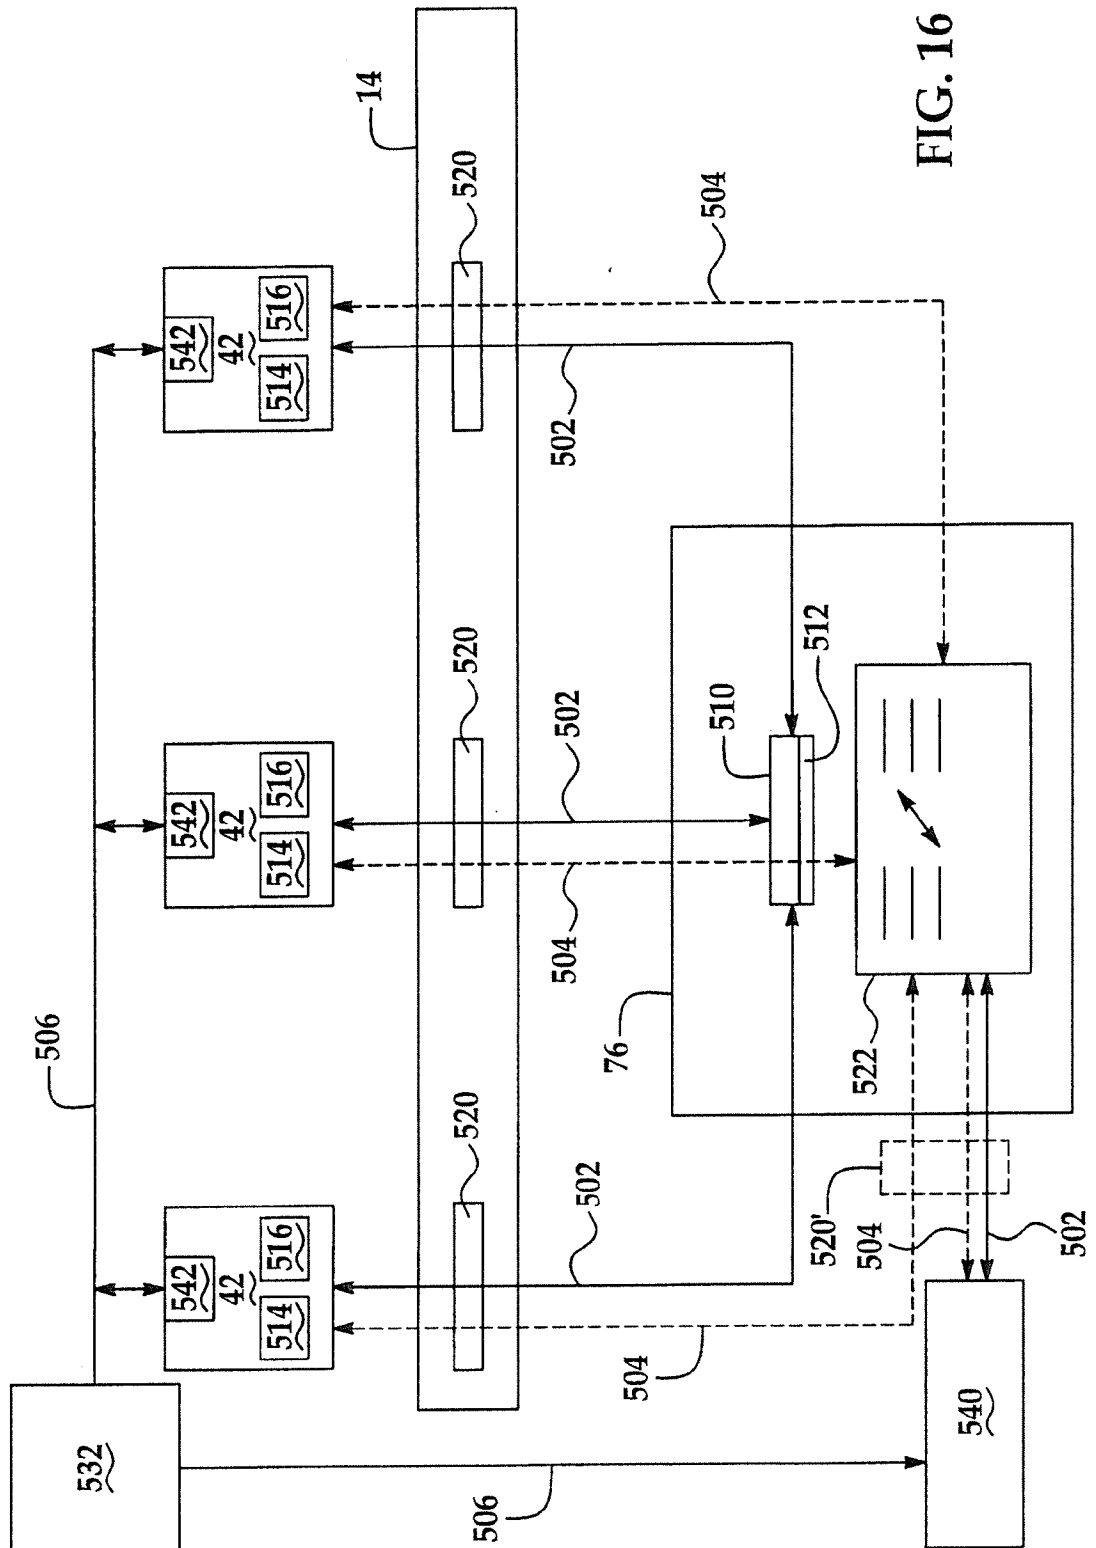


FIG. 16

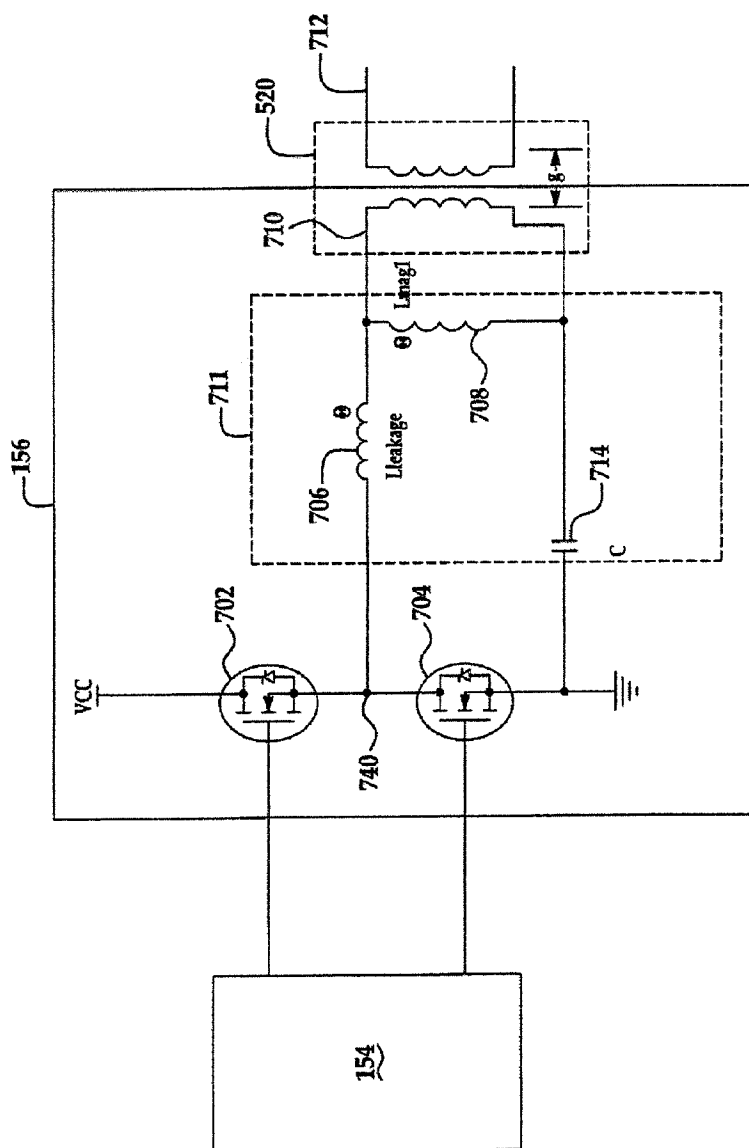


FIG. 17

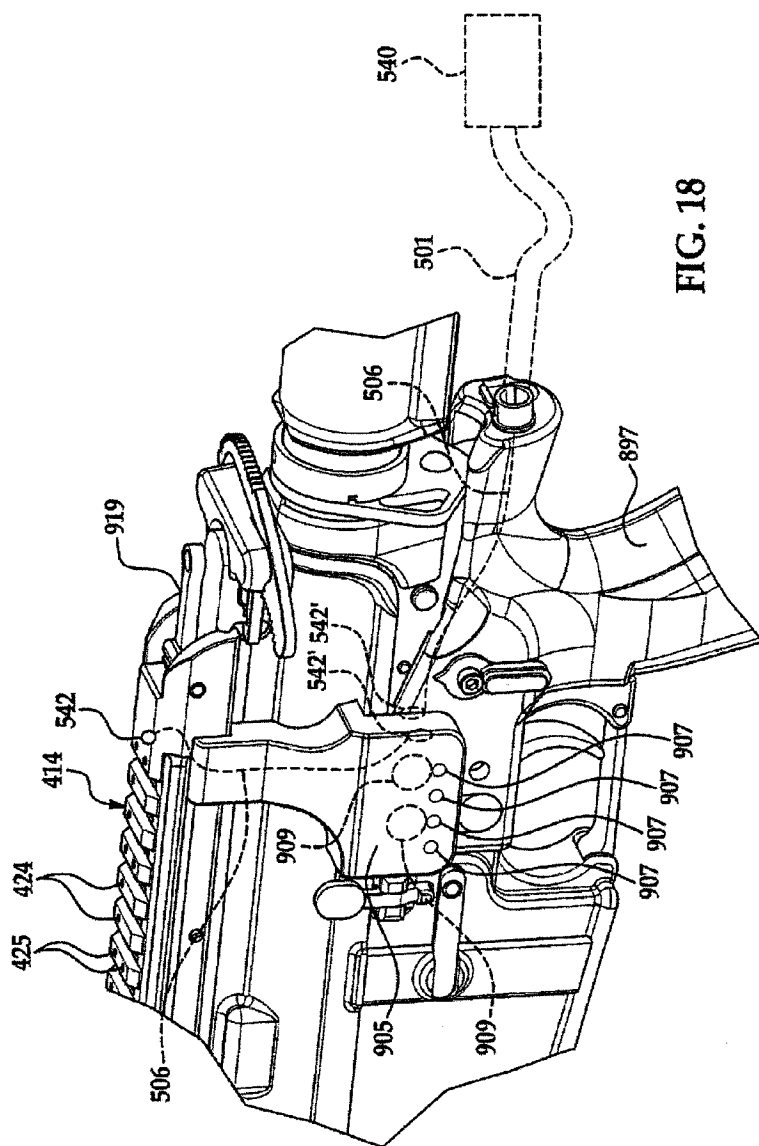


FIG. 18

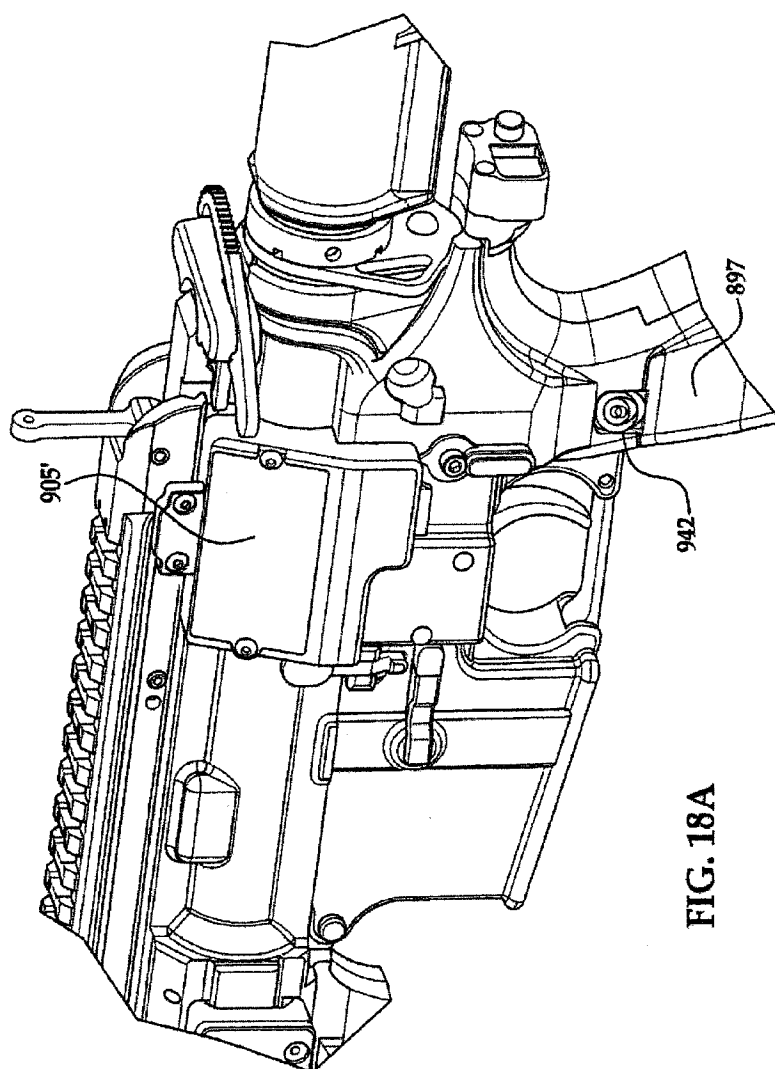
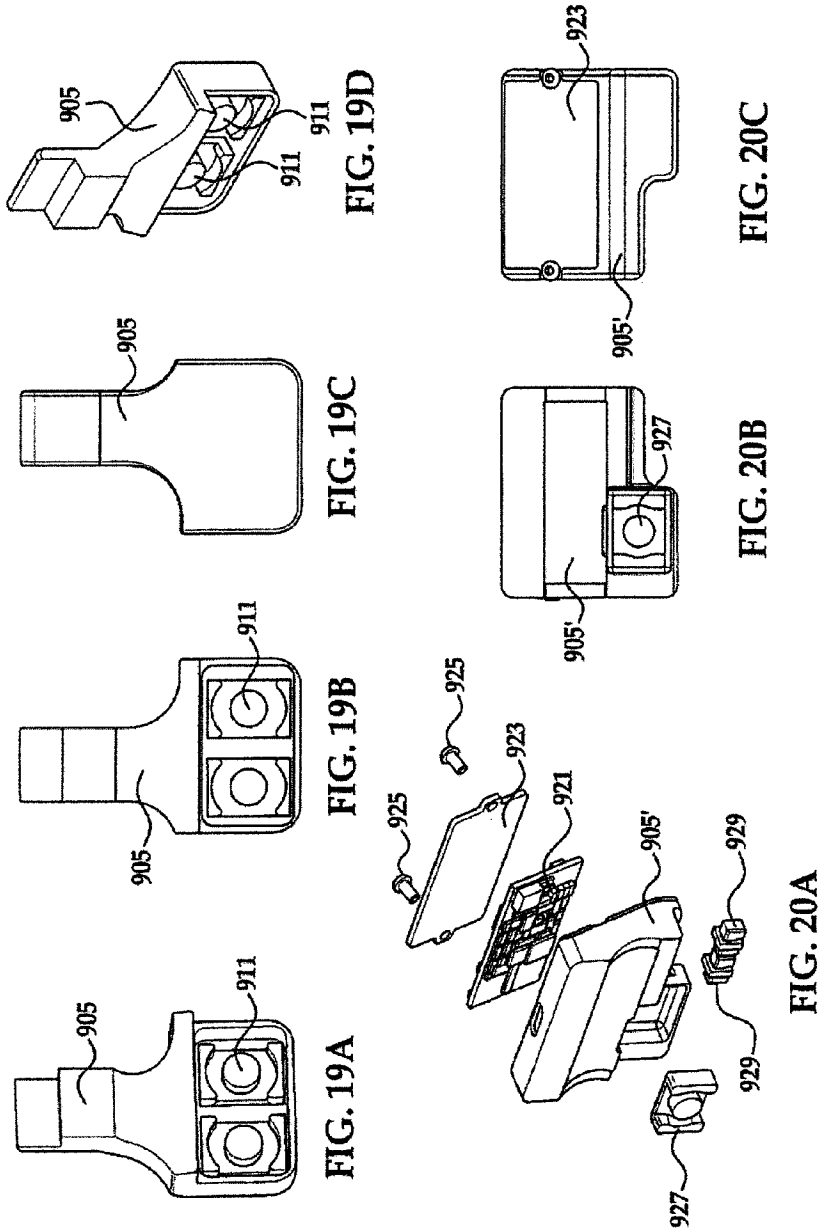


FIG. 18A






FIG. 20D




FIG. 20E




FIG. 20F

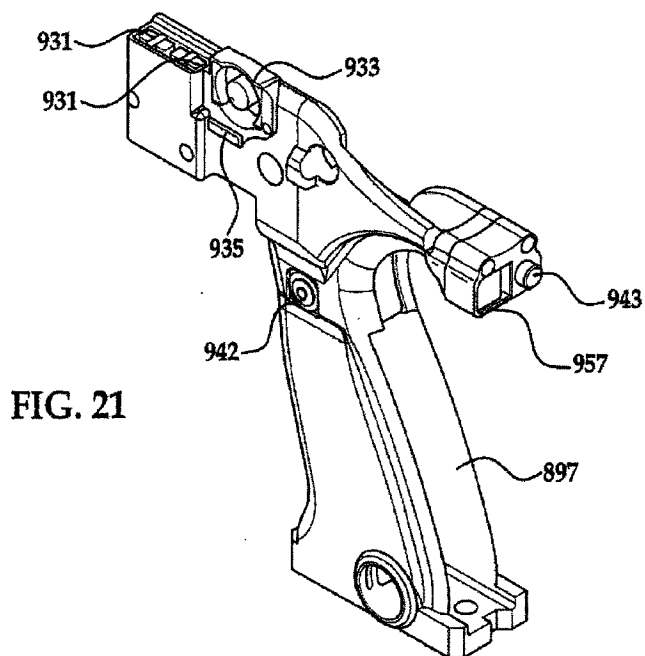


FIG. 21

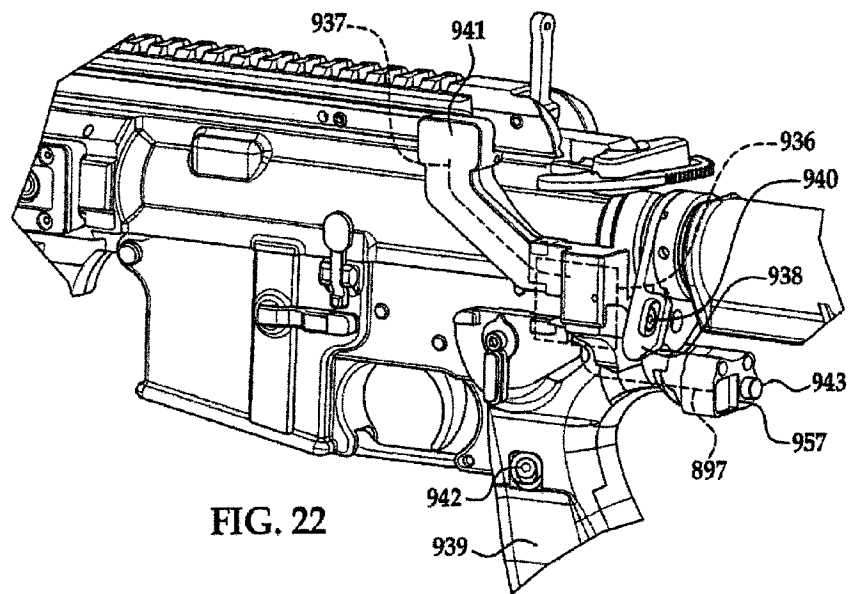


FIG. 22

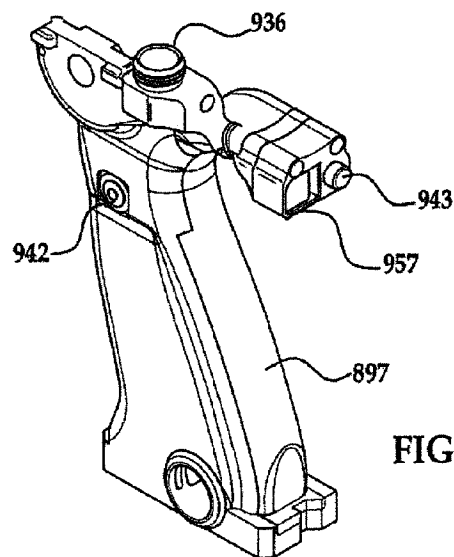


FIG. 23

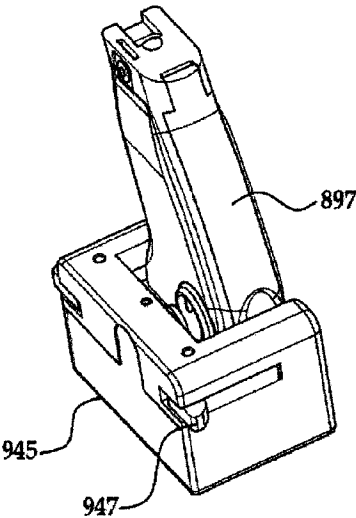


FIG. 24

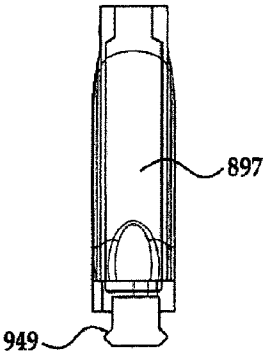


FIG. 25

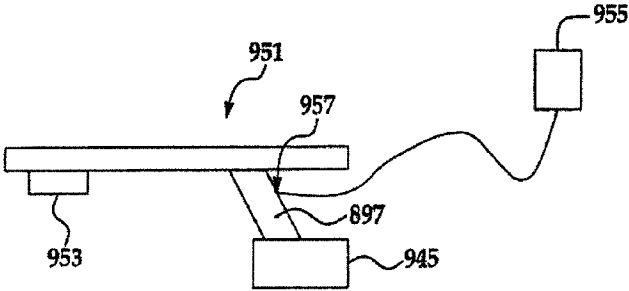
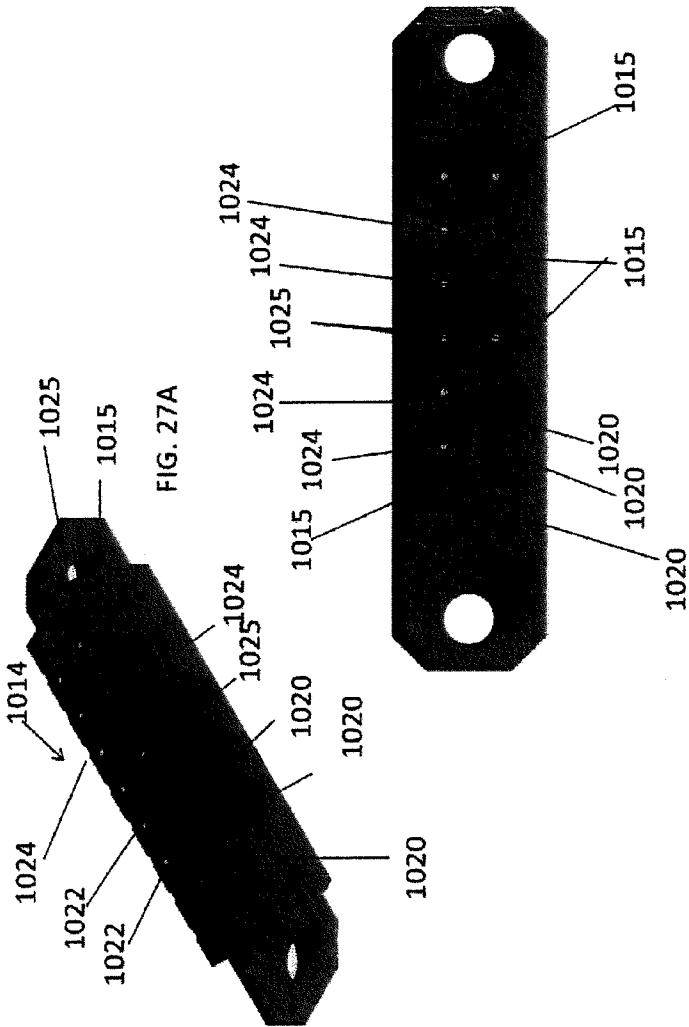


FIG. 26



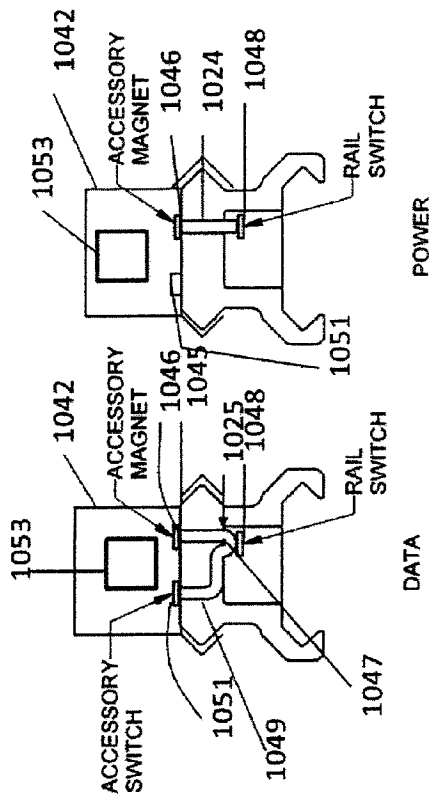
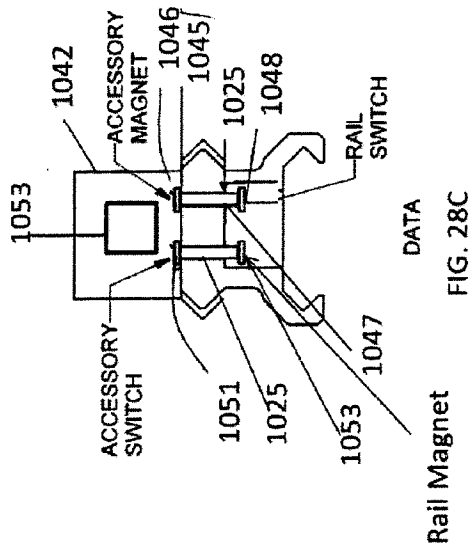
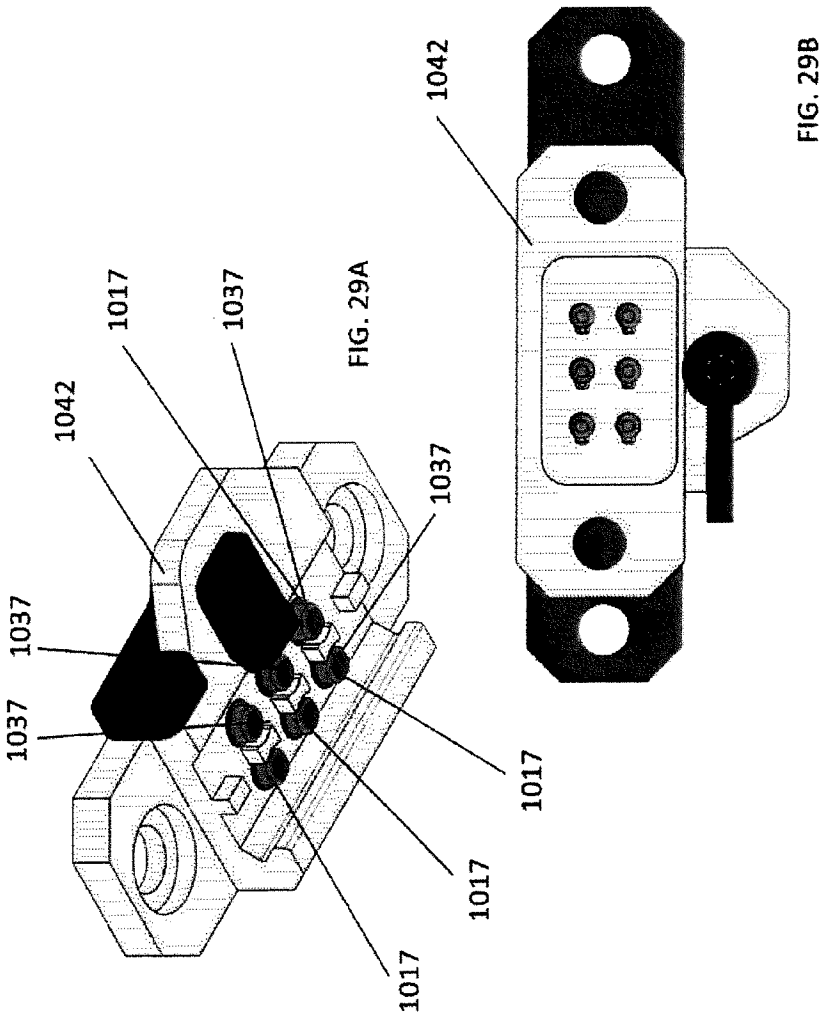
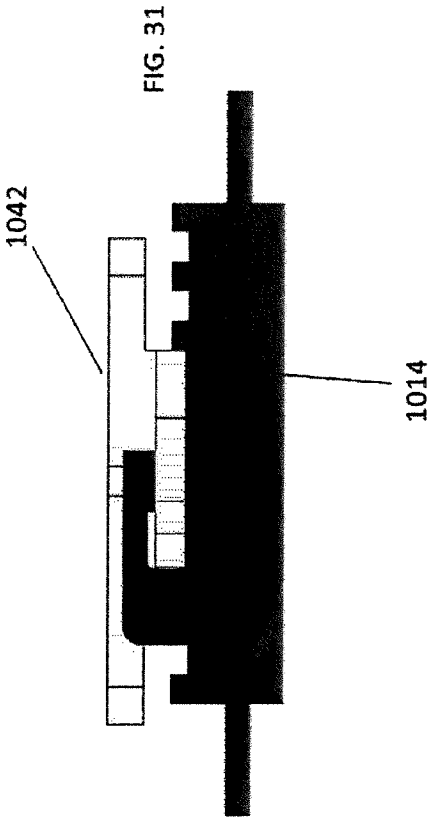
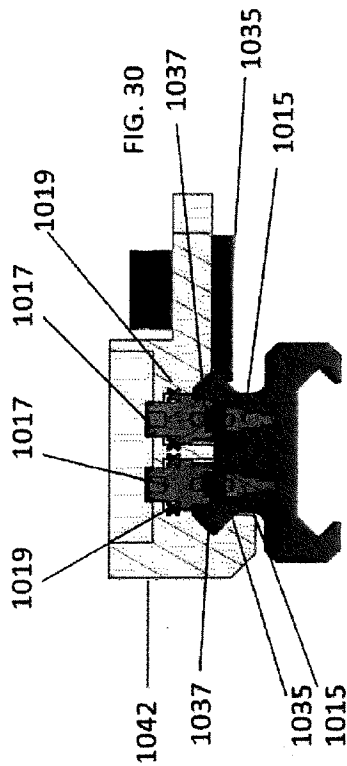



FIG. 28B

FIG. 28A







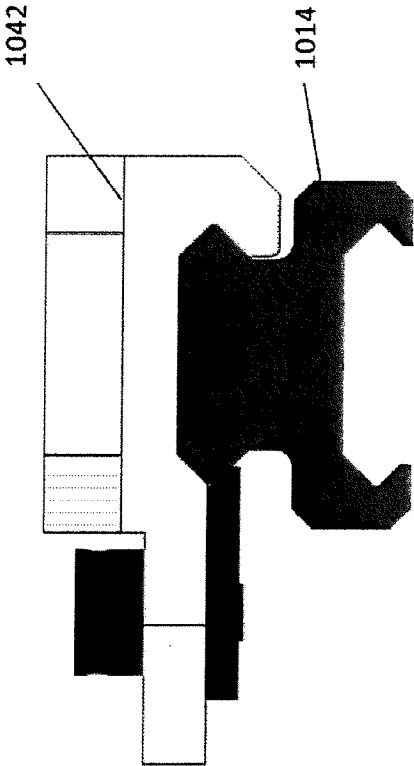

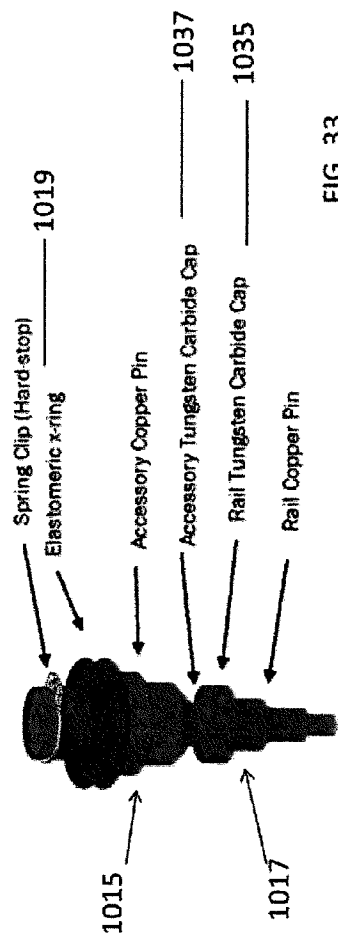


FIG. 33

Rail Contact stack view

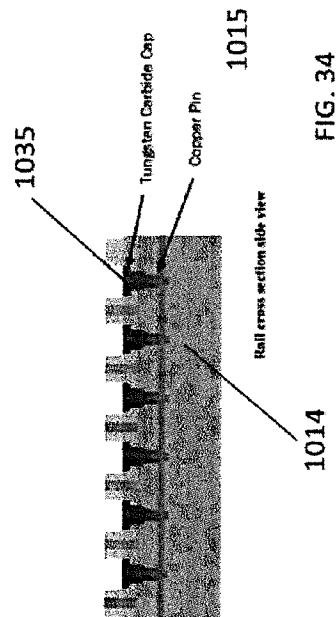


FIG. 34

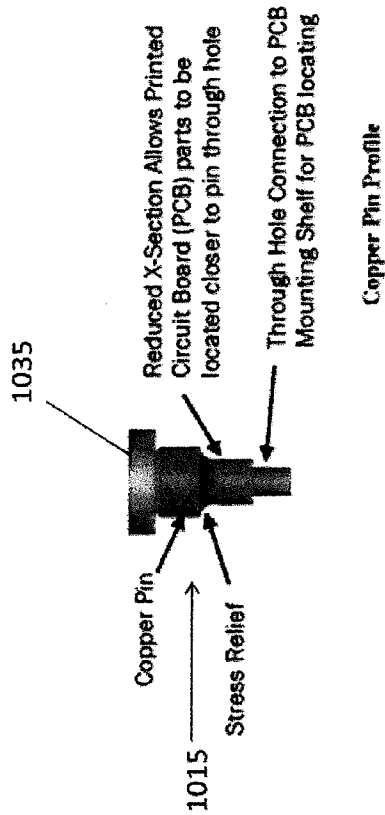
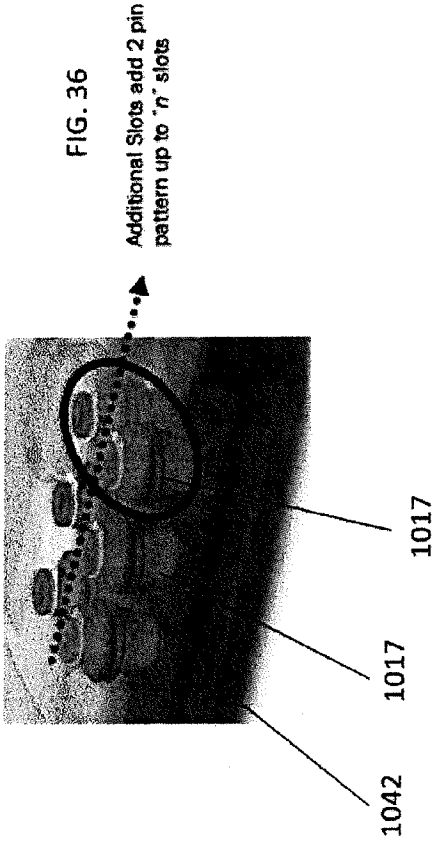
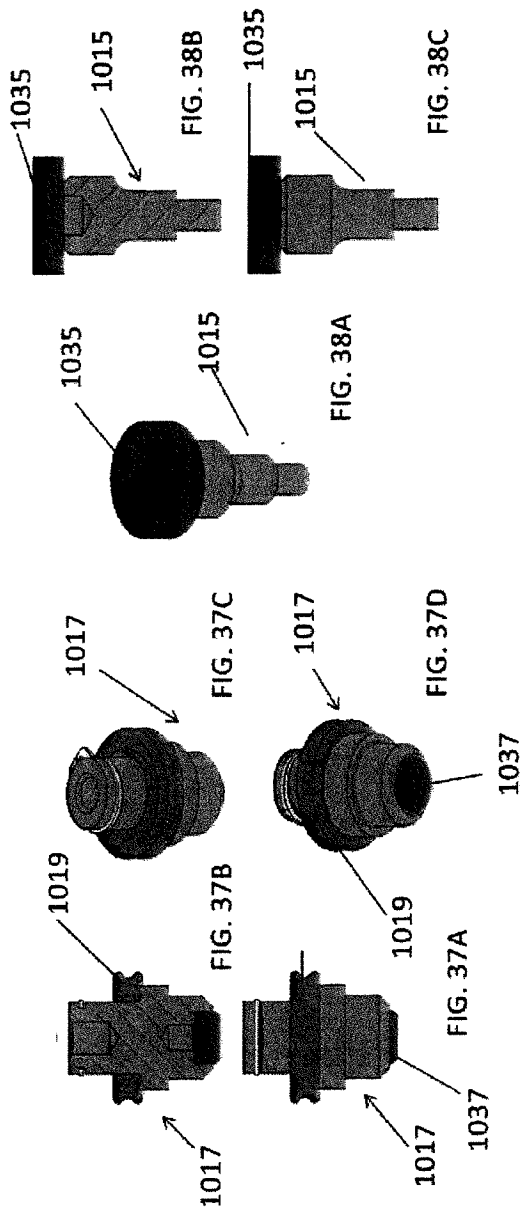


FIG. 35

The accessory base illustrated can take on many forms with respect to footprint size. Depending on the power draw of the accessory, it may straddle several rail cores or one. An example of a three slot device is shown in the illustration.





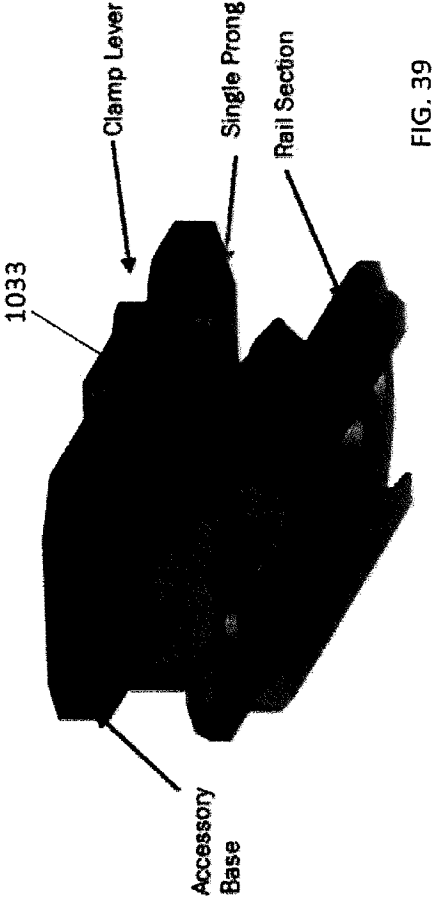
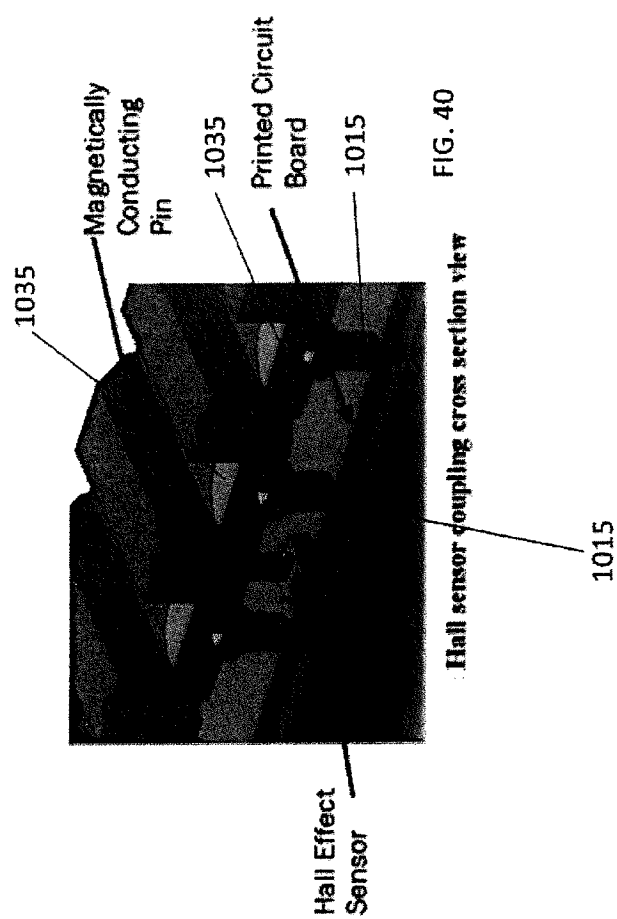
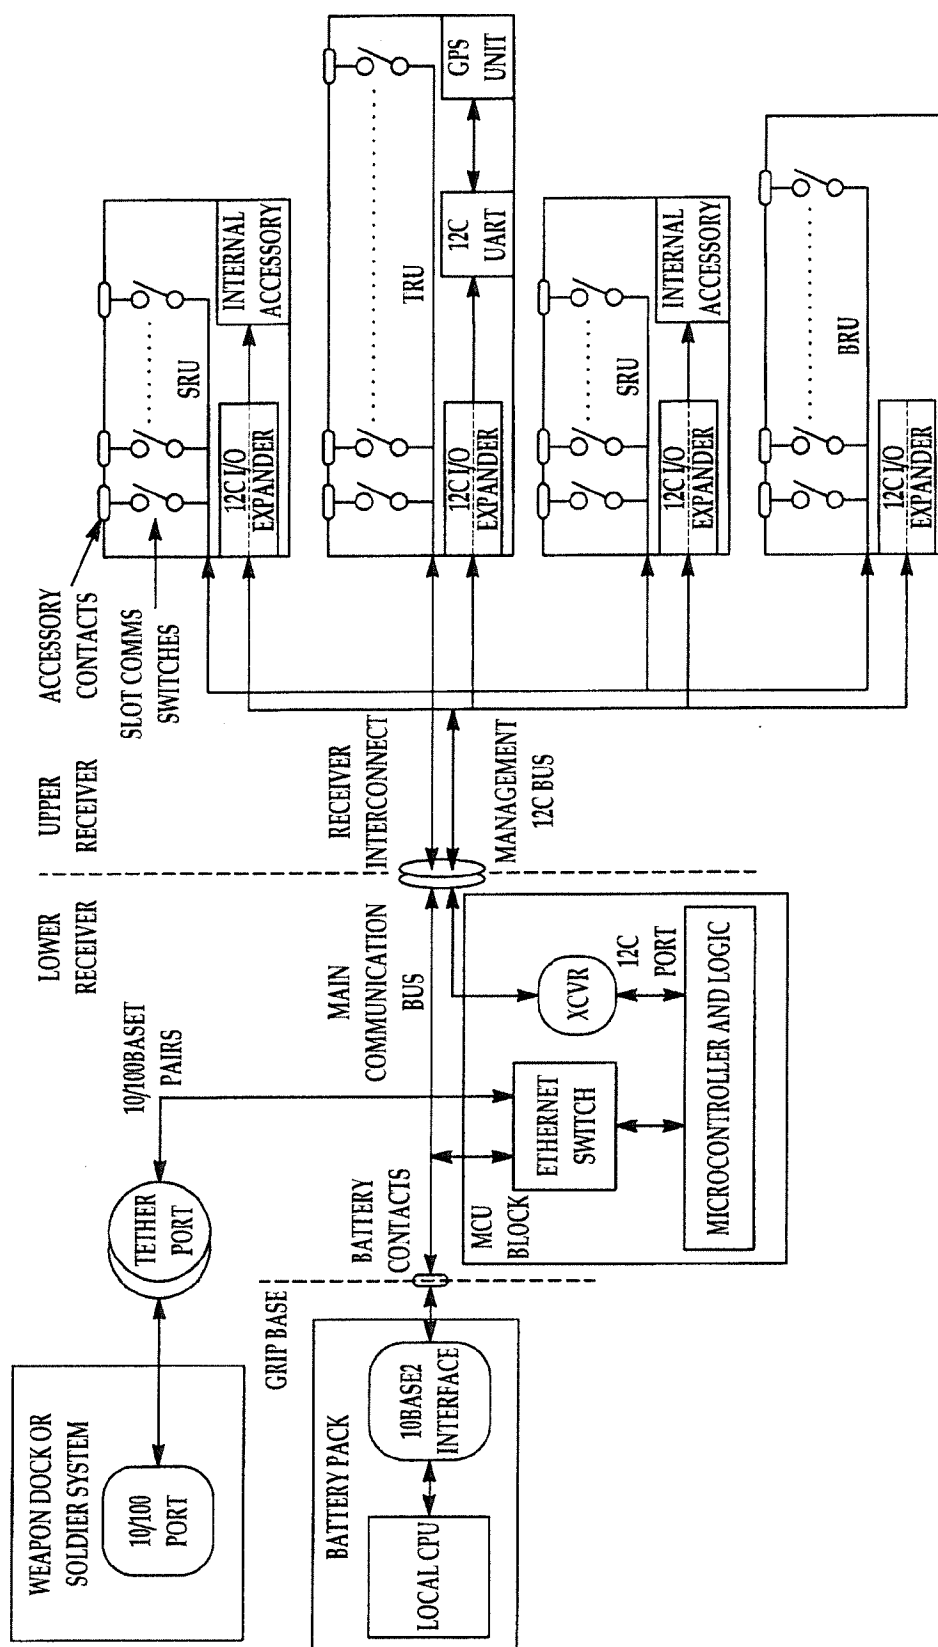


FIG. 39





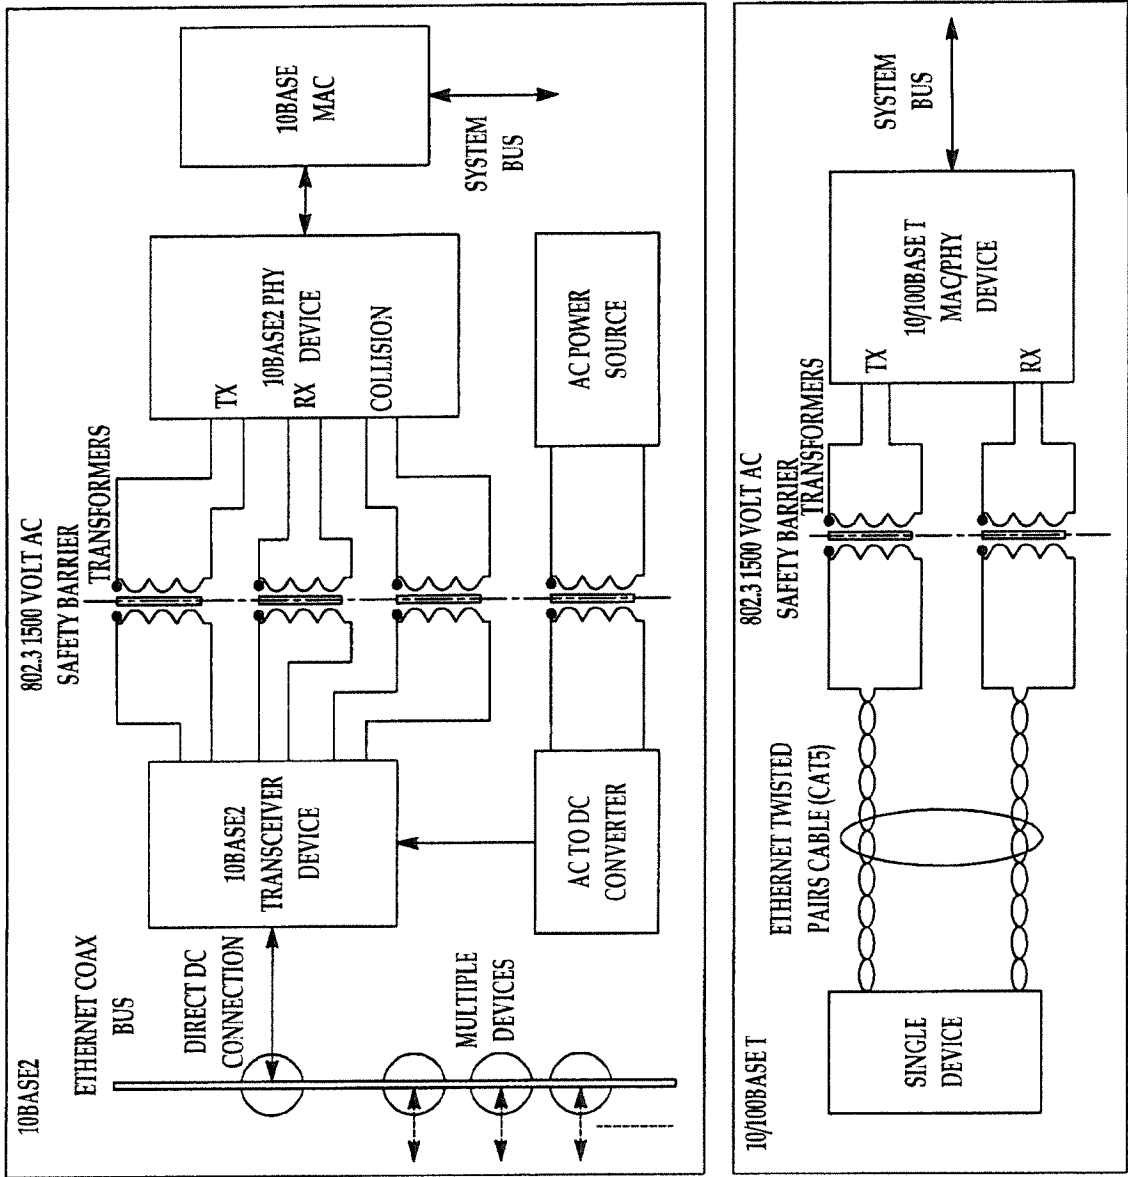


FIG. 42

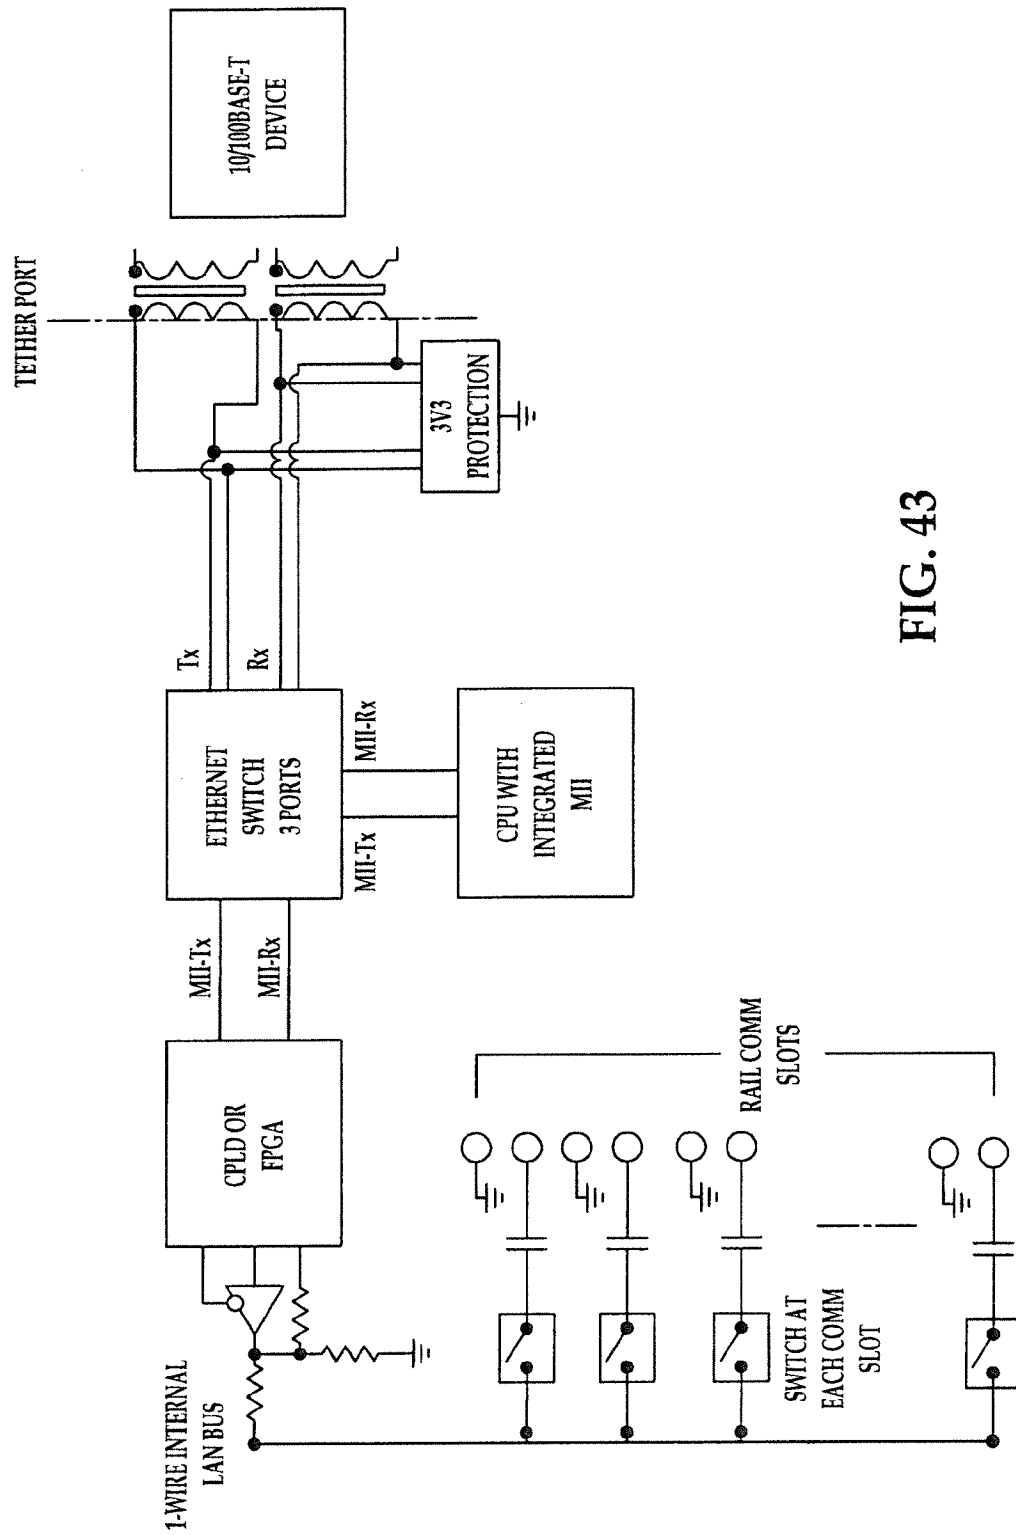


FIG. 43

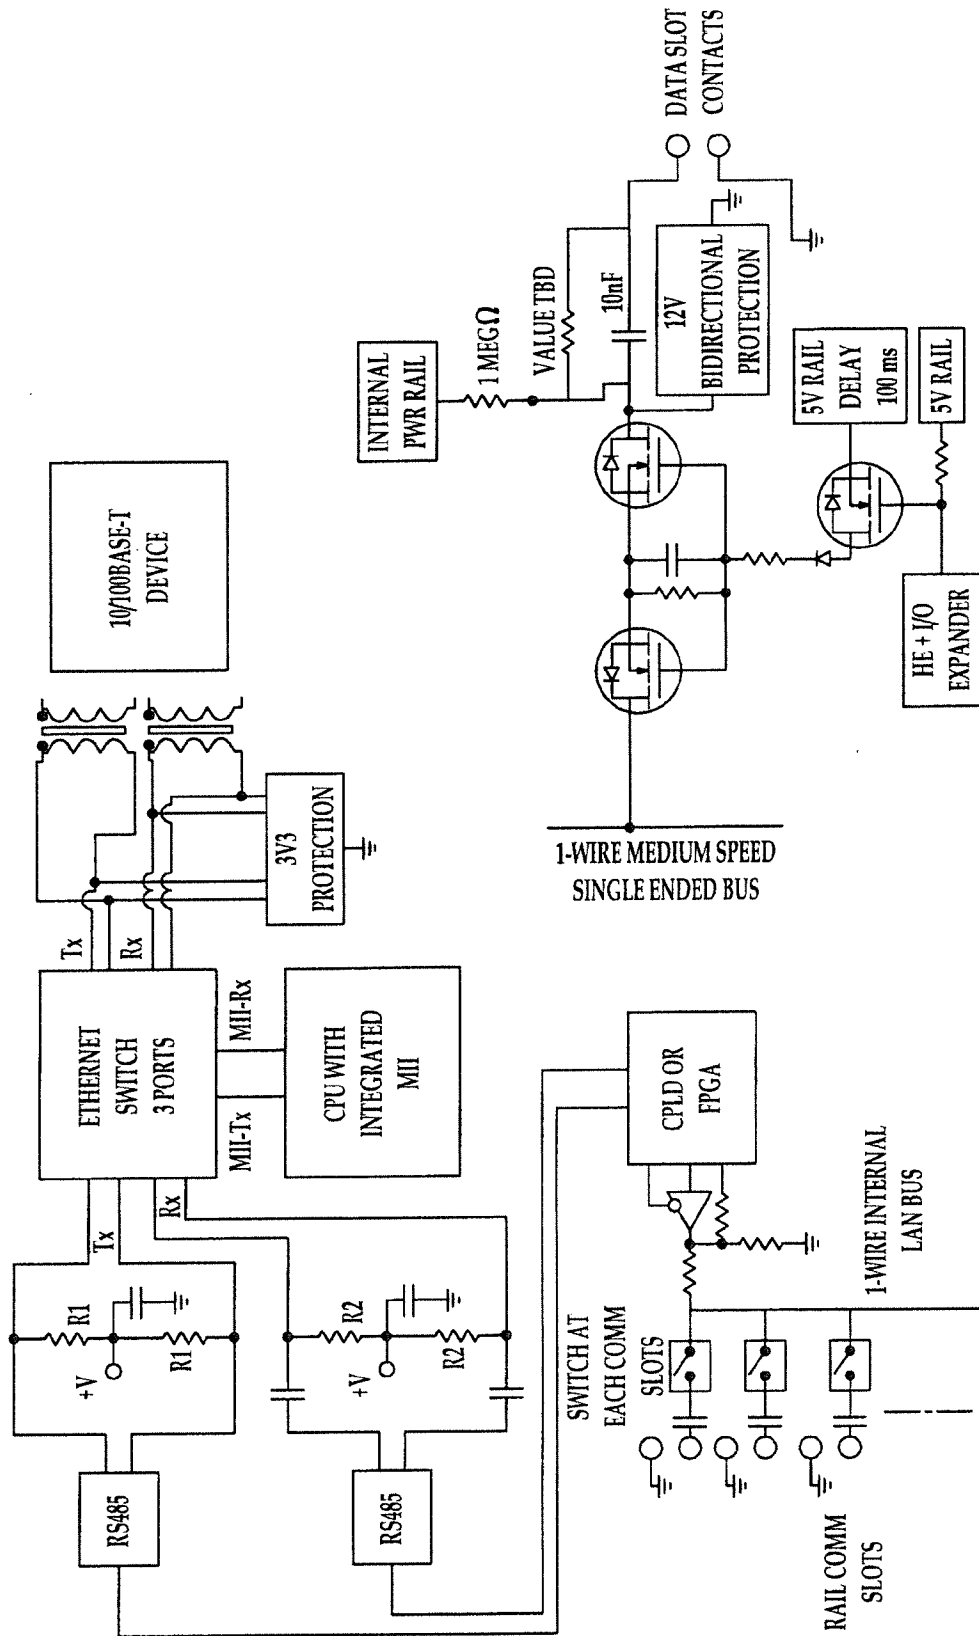


FIG. 45

FIG. 44