

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
3 October 2013 (03.10.2013)



(10) International Publication Number
WO 2013/144004 A8

- (51) International Patent Classification:
B01D 63/06 (2006.01) *B01D 63/10* (2006.01)
- (21) International Application Number:
PCT/EP2013/056043
- (22) International Filing Date:
22 March 2013 (22.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2008565 29 March 2012 (29.03.2012) NL
- (71) Applicant: **AKA PATENTEN B.V.** [NL/NL]; Nusterweg 69, NL-6136 KT Sittard (NL).
- (72) Inventors: **NELEMANS, Bert Johan**; Hobbelrade 81A, NL-6176 CK Spaubeek (NL). **LAHAIJJE, Jochem Franciscus Edith**; Maastrichterlaan 64, NL-6241 JB Bunde (NL).
- (74) Agent: **VELDMAN-DIJKERS, Cornelia Geerdina Catherina**; Ab Ovo Patents B.V., Platz 1 - Limbricht, NL-6141AT Sittard-Geleen (NL).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (48) Date of publication of this corrected version:

1 May 2014

- (15) Information about Correction:
see Notice of 1 May 2014

(54) Title: DEVICE SUITABLE FOR THE TREATMENT OF A FLUID, AS WELL AS A METHOD AND MACHINE SUITABLE FOR THE MANUFACTURE OF SUCH A DEVICE

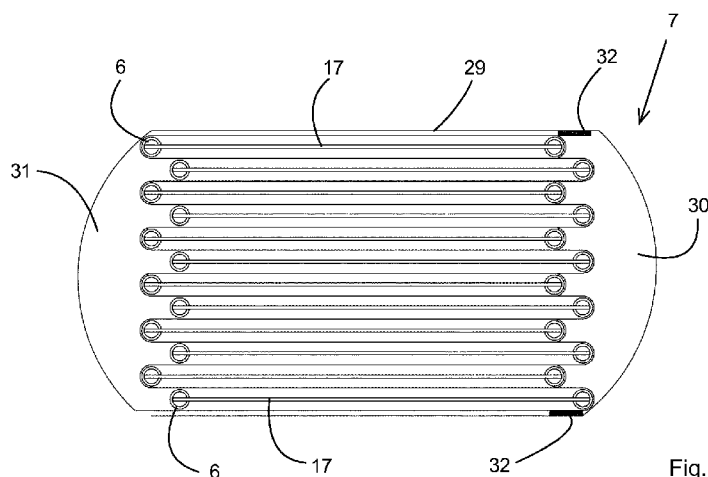


Fig. 7

(57) Abstract: A device, which is suitable for the processing of at least one fluid, is provided with at least one elongated foil, which is formed in a number of reciprocating foil layers. Between two opposite layers of foil, a spacer is situated that is permeable at least parallel to the foil layers. The foil layers and interposed spacers extend spirally around a central axis, wherein folding lines between two foil layers extend substantially parallel to the central axis. Each spacer is coupled to at least an end near the central axis with a support extending parallel to the central axis where, of the supports near the central axis, first supports are situated between two foil layers, which foil layers are connected to one another near the central axis, whereas second supports are situated between two successive first supports.