

9803221-2
IP08 copy




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H05K 1/03, D03D 15/00, 19/00	A1	(11) International Publication Number: WO 98/19506 (43) International Publication Date: 7 May 1998 (07.05.98)
(21) International Application Number: PCT/EP97/05602 (22) International Filing Date: 10 October 1997 (10.10.97) (30) Priority Data: ① 96830545.8 ✓ 25 October 1996 (25.10.96) ✓ EP ✓ (34) Countries for which the regional or international application was filed: IT et al. (71) Applicant (for all designated States except US): GIVIDI ITALIA S.P.A. [IT/IT]; Corso Sempione, 39, I-20145 Milano (IT). (72) Inventors; and (75) Inventors/Applicants (for US only): ① SCARI, Diego [IT/IT]; Villaggio Brugherio, 65, I-20047 Brugherio (IT). SCARI, Marco [IT/IT]; Villaggio Brugherio, 65, I-20047 Brugherio (IT). (74) Agent: SPADARO, Marco; Bianchetti Bracco Minoja S.r.l., Via Rossini, 8, I-20122 Milano (IT).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, ② SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. ✓ Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. 1 PD 1 appl. 2 Invs.	

(54) Title: LAMINATES FOR PRINTED CIRCUITS USING UNIDIRECTIONAL GLASS FABRIC

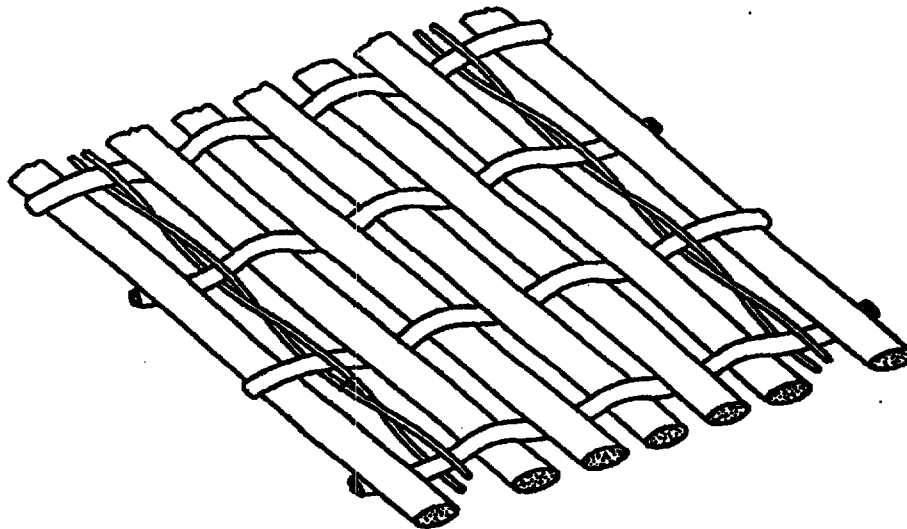

(57) Abstract

A description is provided of laminates for printed circuits using unidirectional glass fabric produced with continuous yarn which is twisted, has a low number of twists or zero twisting turns with different grammes weights, interlaced warpwise with a leno interwoven binding using glass yarns of 5.5 to 22 Tex at a spacing of up to 20 cm. The application of these laminates to the manufacture of printed circuits offers advantages in terms of surface roughness and waviness, dimensional stability, evenness and perforability.