



(51) International Patent Classification:

G06K 7/00 (2006.01) **E21B 44/00** (2006.01)
G06K 7/10 (2006.01)

(21) International Application Number:

PCT/US2010/044173

(22) International Filing Date:

2 August 2010 (02.08.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/230,730 2 August 2009 (02.08.2009) US

(71) Applicant (for all designated States except US):

CAMERON INTERNATIONAL CORPORATION
[US/US]; 1333 W Loop South, Suite 1700, Houston,
Texas 77027 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BAXTER, Daniel
Brent** [US/US]; 18042 Platinum Springs Drive, Tomball,
Texas 77375 (US).

(74) Agent: **SWANSON, Tait R.**; 7915 FM 1960 West, Suite
330, Houston, TX 77070 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MANUAL RFID ANTENNA TUNING SYSTEM AND METHOD

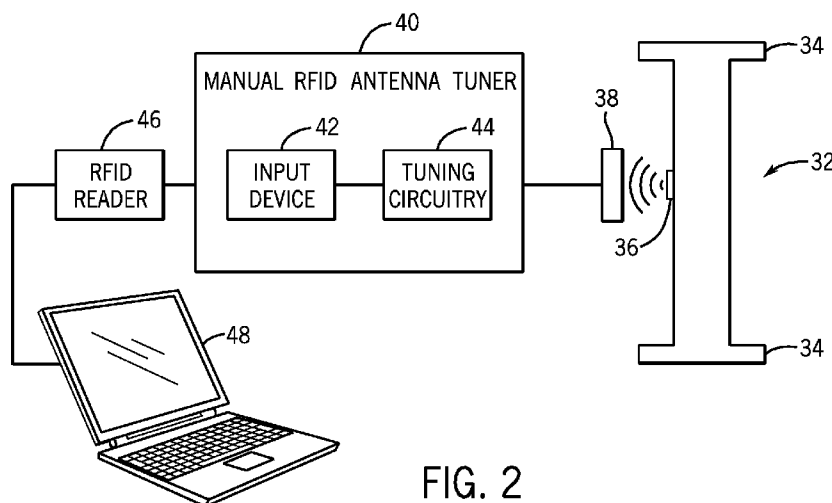


FIG. 2

(57) Abstract: A system, in certain embodiments, includes a radio frequency identification (RFID) antenna configured to communicate with an RFID tag. The system also includes an antenna tuner electrically coupled to the RFID antenna, and configured to manually tune the RFID antenna to match an inductance of the RFID tag.