

THIS SHEET HAS BEEN REPLACED

SELECTIVELY ACTUATABLE LIGHTERBACKGROUND OF THE INVENTIONCross-Reference to Related Applications

5 This is a continuation-in-part of U.S. Patent
Application Serial No. 07/723,989 filed on July 1,
1991, entitled "Selectively Actuatable Lighter", which
is a continuation-in-part of U.S. Patent Application
Serial No. 07/609,668 filed on November 6, 1990,
10 entitled "Selectively Actuatable Lighter", abandoned,
which is a continuation of Serial No. 07/239,734 filed
on September 2, 1988, entitled "Selectively Actuatable
Lighter", which issued on March 26, 1991 as U.S.
Patent No. 5,002,482. This is also a continuation-in-
15 part of U.S. Patent Application Serial No. 07/912,421,
filed on July 10, 1992, entitled "Selectively
Actuatable Lighter", which is a continuation of U.S.
Patent Application Serial No. 07/609,668. Each of
these four patent applications is incorporated herein
20 by reference.

 This application is also related to U.S. Patent
No. 5,125,829, entitled "Bidirectional Selectively
Actuatable Lighter" which issued on June 30, 1992, and
25 U.S. Patent No. 5,092,764, entitled "Selectively
Actuatable Lighter With Locking Value Cap" which
issued on March 3, 1992. This application is also
related to U.S. Patent Applications Serial Nos.
_____, _____ and _____, each entitled
30 "Selectively Actuatable Lighter" and each filed
concurrently herewith. Each of these two patents and
three patent applications is incorporated herein by
reference.

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

Technical Field

This invention relates generally to lighters
5 which consume fuel such as, for example, butane which
is stored in a reservoir in a liquid state, then
passed through a valve means and finally ignited by a
spark or other similar means. More particularly, the
invention relates to a butane cigarette lighter having
10 a feature which interferes with depression of a valve
actuator and in turn hinders expulsion of fuel from a
valve nozzle (i.e., fuel nozzle) and/or generation of
sparks thereby rendering operation of the lighter by
young children even more difficult. Advantageously,
15 this feature of the lighter may be deactivated by
moving a latch to a non-interfering position, thus
facilitating flame production.

Description of the Art

20 Numerous lighters are known, some of them
incorporating features which are designed to render
operation of the lighter more difficult by certain
users. Some of such features relate to mechanisms
25 which are designed to prevent ignition of a fuel
source unless the lighter is properly oriented,
mechanisms which are designed to automatically turn
off a fuel source supply valve, and tamper protection
arrangements.

30 More recently, attention has been directed toward
preventing ready actuation of such lighters by persons
normally not able to appreciate the potential danger
of the flame. Individuals normally contemplated in
35 these efforts are young children, in the age category
younger than five years.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

U.S. Patent No. 4,784,601 to Nitta relates to a gas lighter having an L-shaped slideable stopper which is positionable to prevent descent of a gas lever
5 which controls fuel flow. The lighter is rendered operable by moving the stopper outward so that its vertical leg is displaced from the top surface of the lighter housing. The L-shaped slideable stopper must be manually moved into its locking position each time
10 it is desired to lock the lighter.

U.S. Patent No. 4,784,602 to Nitta relates to a gas lighter having an L-shaped slideable stopper which is positionable to prevent descent of a gas lever
15 which controls fuel flow. The lighter is rendered operable by moving the stopper inward so that its vertical pin engages a hole in the surface of the lighter housing. The L-shaped slideable stopper must be manually moved into its locking position each time
20 it is desired to lock the lighter.

U.S. Patent No. 4,786,248 to Nitta relates to a piezoelectric lighter equipped with a thumb-latch slideably fitted within a lighter casing. The thumb
25 latch is manually slideable into and out of a position which interferes with depression of a thumb-pusher. The lighter is rendered operable by manually sliding the thumb-latch to an unlocked position. After operation of the lighter a user must manually slide
30 the thumb-latch to its locked position in order to lock the lighter.

U.S. Patent No. 4,904,180 to Nitta relates to a piezoelectric lighter equipped with a lock means which
35 automatically returns to a locked position after use of the lighter. The lock means includes a stopper and

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

a leaf-spring which keeps the stopper urged toward the windshield. The lighter may only be operated after the stopper is drawn backwards, away from the
5 windshield. The lighter cannot maintain the stopper in the drawn back position without the application of constant force by a user. That is, no means are provided to maintain the lighter in an unlocked configuration.

10

U.S. Patent No. 1,895,032 to Fisher relates to a lighter in which a manual control means is movable out of engagement with a shoulder portion of the lighter so as to enable the manual control means to be
15 depressed thereby causing the lighter to operate. The control means returns to its position in engagement with the shoulder portion after use of the lighter. The lighter cannot maintain the control means in its out of engagement position without the application of
20 constant force by a user.

U.S. Patent No. 4,830,603 to Cirami relates to a cigarette lighter in which a locking mechanism is provided partially under a valve-actuating push-button
25 and extends into a compartment appended to but distinct from a fuel compartment. The locking mechanism relocks itself after each depression of the push-button. In particular, one end of a stiffly flexible spring steel wire is held firmly in place in
30 the compartment. Another end of the spring steel wire forms a probe extending into a channel provided in the underside of the push-button. The spring steel wire, in a locked configuration, prevents depression of the push-button by engaging a low ceiling on the underside
35 of the push-button. A portion of the spring steel wire in the form of a loop extending outward from the

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

lighter is accessible by an operator and may be suitably moved by the operator thereby causing the probe to move within the channel in the underside of the push-button.

U.S. Patent No. 4,832,596 to Morris, Sr. relates to a cigarette lighter having a stop member slideably mounted thereon for releasably engaging a gas valve actuating lever. In particular, a spring biased stop member is slideably mounted on a top portion of a conventional disposable cigarette lighter. The stop member is biased so as to place one of its ends under the lighter's gas valve actuating lever so as to prevent movement of the lever in a direction which may open the gas valve. The lever may be actuated once the stop member is pushed in a direction opposite to the biasing force of the spring so as to slide the end which is under the lighter's gas valve outward.

U.S. Patent No. 4,717,335 to Loveless relates to a cigarette lighter in which rotation of a spark-producing wheel is limited. In particular, the spark-producing wheel may be rotated in one direction to deliver a spark toward a nozzle through which gaseous fuel is passed, thereby causing the fuel to ignite and operating the lighter. Rotation of the spark-producing wheel in the other direction may deliver a spark away from the nozzle. The spark-producing wheel has a pin-shaped structure attached thereto which serves to limit the rotation of the wheel to under 360° by contacting the housing structure. Thus, whether a spark indeed is produced depends upon the direction of attempted rotation and the position of the pin-shaped structure relative to the housing structure. In theory, once the lighter is operated

This Sheet Has Been Replaced



and the fuel ignited, and the pin-shaped structure has traversed its entire path of travel, subsequent operation of the lighter is impeded since the pin-shaped structure comes into contact with the housing, preventing a spark from occurring in the vicinity of the fuel nozzle.

U.S. Patent Nos. 4,028,043 and 4,049,370 each to Neyret relate to presale tamper protection mechanisms which partially surround a spark-producing wheel, fuel nozzle or depressible valve actuation member of a lighter. These presale tamper protection mechanisms are attached to the lighter housing by frangible webs and are removed by a purchaser after sale of the lighter to expose the spark-producing wheel, fuel nozzle and/or depressible valve actuation member. However, such a presale tamper protection mechanism is of limited value once initially removed by a purchaser.

U.S. Patent Nos. 3,547,566 to Tamarin and 3,899,286 to Lockwood et al. relate to lighters having orientation sensing mechanisms which hinder or prevent actuation of the lighter in an inverted position. Unfortunately, such mechanisms may not provide a sufficient degree of child resistancy to young children who tamper with the lighter since they merely hinder operation in prescribed orientations.

U.S. Patent No. 4,921,420 to Johnston relates to a disposable lighter having a release means that is physically separated from the conventional lighting means. The lighter may only be operated once the release means is released. The distance separating the release means and the conventional lighting means



THIS SHEET HAS BEEN
REPLACED

is intended to be sufficiently large so as to make it difficult for small children to operate the lighter.

5 U.S. Patent No. 5,074,781 to Fujita relates to a cigarette lighter having a lock member which must be rotated in a specified direction towards one side of the lighter so as to allow a depressible valve actuator to be depressed and the lighter to operate.

10

U.S. Patent No. 5,076,783 to Fremund relates to a lighter having a depressible valve actuator which is coupled to a vertical rod which extends to an opposite end of the lighter where it contacts a locking member.

15 The locking member must first be displaced so as to enable depression of the valve actuator.

U.S. Patent No. 5,090,893 to Floriot relates to a lighter having a slide member which, when in a first position, prevents depression of a valve actuator. The slide member is slideably movable to a second position in which the valve actuator may be depressed. The slide member is retained in each of the first and second positions by its interaction with and
25 configuration relative to the lighter housing. The slide member is initially moved from its second position toward its first position by forces applied directly from the valve actuator. The slide member is not capable of vertical movement. Additionally, the
30 slide member protrudes from the lighter when in its first position.

Many mechanisms which are designed to render operation of the lighter more difficult by certain
35 users are unnecessarily complicated, present difficulty in their manufacture and/or exhibit a high

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

likelihood of mechanical failure during use. Another disadvantage found in some devices is that the particular construction employed limits the shape and size of the lighter housing due to the requirement that the housing be large enough to accommodate such mechanism(s). Further disadvantages relate to the relative ease with which some mechanisms may be defeated and to the reliability of the mechanisms.

10 For example, some mechanisms may be overridden or removed with relative ease. Additionally, some devices are not equally adaptable for use by both right-handed and left-handed users, and some include inconveniently shaped or positioned levers or knobs

15 which need to be actuated by the user in order to operate the lighter. Similarly, some devices which may indeed be equally adaptable to both right-handed and left-handed users employ a mechanism which is actuated differently and/or moved to different

20 positions depending on whether the user is right-handed or left-handed. Furthermore, some of these devices require repositioning of the lighter in an operator's hand after actuation of the mechanism and before the lighter is operated to produce a flame.

25 For example, some lighters include an actuatable mechanism located sufficiently far from a valve actuation means, or on another side of the lighter than the valve actuation means, so as to result in awkward operation of the lighter. Additionally, some

30 devices require an excessive number of components while some devices include components which are configured such as to require an excessive force to actuate a depressible valve actuator. For example, some devices include a latch which requires an

35 excessive amount of force on the valve actuator in order to automatically return the latch to its

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

normally latched position after the lighter is operated. Some devices include a latch having an overly obvious protrusion which is too easily moved
5 into a noninterfering position. Additionally, a portion of such a latch or protrusion is too easily broken off or otherwise removed by a user, thus rendering the lighter either permanently locked and inoperable, or rendering the latch effectively in a
10 permanent unlocked position and thus permanently overridden.

Although it is known to prevent or hinder presale actuation of a depressible valve actuation member or
15 actuation of a lighter in a specified orientation, none of the above-described lighters provides an efficiently manufacturable, relatively small, reliable mechanism for preventing actuation of the depressible valve actuation member and equally adaptable for use
20 by both right-handed and left-handed users and which is similarly actuated by both right-handed and left-handed users.

As will be appreciated, development of a "child-proof" lighter per se is probably not viable. At best, it can be reasonably sought to create a lighter having features which enhance its child-resistant capability, but how "child-resistant" a lighter will be will depend upon many factors and circumstances.
25 Nevertheless, any lighter having features which enhance its child-resistant capability will have limitations with respect to young children, and no such lighter should provide parents or adults with a false sense of security so that they may become less
30 cautious in their handling of the lighter or permit access to the lighter by young children. Further,

This Sheet Has Been Replaced



such lighters should not be made so difficult to light as to cause adults to use alternative forms of lighting, i.e., matches, which are generally
5 considered to be potentially more dangerous.

The present invention is directed toward a reliable flame producing lighter which is selectively actuatable in such a manner as to provide a
10 substantial degree of difficulty for young children - younger than five years - to actuate the lighter and produce a flame, while being user friendly and capable of actuation by adults.

15 SUMMARY OF THE INVENTION

This invention relates to a selectively actuatable flame producing lighter having a latch means comprising a latch which is normally in a
20 latched position and which is movable to an unlatched or non-interfering position in which the lighter may be operated. The latch is preferably relatively flush mounted with respect to the lighter housing when in its normally latched position, and does not include
25 portions or protrusions which are easily removed or overly capable of inadvertent movement to a non-interfering position. Additionally, the latch is preferably not under any loading or stress when in its latched as well as unlatched position, and is retained
30 in such positions by its interaction with and configuration relative to the valve actuator. Once in its unlatched position, depression of the valve actuator results in downward movement of part of the actuator as well as the latch. The latch is
35 preferably initially moved from its unlatched position toward its latched position by forces applied directly



from a camming means associated with the lighter housing.

5 Advantageously, the latch may be operated with the same finger a user employs to depress a valve actuation lever, without requiring repositioning of the lighter in a user's hand. The lighter is adapted for use by right-handed as well as left-handed users
10 with the same relative ease. The lighter is preferably similarly actuated by both right-handed and left-handed users, without detracting from the effectiveness of the lighter's child-resistant capability. That is, the latch is preferably movable
15 along only a single path from its latched position to its unlatched position, whether operated by right-handed or left-handed users.

One particular embodiment of the invention
20 relates to a flame producing lighter which comprises a housing defining a reservoir for containing a combustible gaseous medium such as fuel under pressure; valve means arranged for selective actuation between a normally closed position which prevents exit
25 of the gaseous medium from the reservoir, and an open position which permits exit of gaseous medium from the reservoir through the valve means; means for selectively producing sparks at a location proximate the gaseous medium exit opening of the valve means
30 thereby selectively causing ignition of the gaseous medium; means normally positioned for preventing actuation of the valve means to the open position, the valve actuation prevention means being incapable of vertical movement when in its normal position and
35 being movable out of its normal position inward into a second position only by application of an external



force, where it is capable of vertical movement; means
for selectively moving the valve actuation prevention
means to the second position whereby actuation of the
5 valve means to the open position is permitted thereby
selectively permitting exit of the combustible gaseous
medium from the valve means and ignition of the
gaseous medium by sparks produced by the spark
producing means, wherein the valve actuation
10 prevention means automatically returns to the normal
position after actuation of the lighter. The lighter
preferably includes means to retain the valve
actuation prevention means in the second position,
thus retaining the lighter in an unlatched
15 configuration. Such retention means may include
portions of the housing and/or portions of the valve
actuation prevention means and/or portions of the
valve actuator. Additionally, the valve actuation
prevention means of the lighter is preferably
20 constrained to move along only a single path from its
normal, or latched, position to the second, or
unlatched, position. The valve actuation prevention
means is preferably under no loading when in each of
its latched as well as unlatched positions.

25 In this embodiment, the valve means is preferably
actuated to the open position by actuator means and
the means for preventing actuation of the valve means
to the open position comprises interference means for
30 preventing movement of the actuator means, the valve
actuation interference means being selectively movable
to a position out of interference with the valve
actuator means. The valve actuation interference
means is normally retained in a valve actuation
35 interference position, the movement thereof to the
position out of interference with the valve actuator



THIS SHEET HAS BEEN REPLACED

means is resiliently provided. Advantageously, the resilient movement of the valve actuation interference means facilitates the return of the valve actuation interference means to its interfering position once the valve actuator is released, thus preventing the valve nozzle from opening. A camming means such as ramps formed within the housing may also be employed to facilitate the return of the valve actuation interference means to its interfering position. Illustratively, the valve actuation means may be retained in its latched and unlatched positions by its interaction with the actuator means. Additionally, the valve actuation interference means is preferably attached to the valve actuator such as by way of a slideable arrangement.

The valve actuation interference means may take on a variety of forms such as a latch means, a latch or an interference member.

The spark producing means of the lighter preferably includes flint material and a rotatable spark-producing wheel which has a toothed surface positioned and arranged to selectively frictionally contact the flint material. Alternatively, the means for selectively producing sparks may be an electric spark-producing means, such as a piezoelectric spark-producing means.

Another embodiment of the invention relates to a flame producing lighter resistant to unauthorized use and normally maintained in a latched configuration comprising a housing; fuel supply means for supplying fuel to be ignited; ignition means for igniting the fuel; valve means for controlling the flow of the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

fuel; a valve actuator which normally prevents the flow of the fuel when in a first position and is depressible to a second position which permits
5 actuation of the fuel supply means thereby permitting fuel to flow out from the fuel supply means; and a latch positioned so as to normally prevent depression of the depressible valve actuator and normally maintain the lighter in the latched configuration.
10 For example, the latch may include at least a portion normally positioned between at least a portion of the valve actuator and at least a portion of the housing.

15 In this embodiment, inward movement of the latch enables a tip portion of the latch to become aligned with a cavity in or near the housing, the cavity being sufficient in size to accommodate the tip portion so as to eventually enable the valve actuator and the latch to be depressed.

20 Such inward movement of the latch places the lighter in an unlatched configuration in which the valve actuator is capable of being depressed, thereby permitting fuel to flow. Preferably, the unlatched
25 configuration is maintained until the valve actuator is depressed.

Another embodiment of the lighter employs means for preventing movement of the actuator means, such
30 prevention means having a finger actuatable portion and an interfering portion, the interfering portion being normally in alignment with an interfering portion of the housing thereby preventing movement of the actuator means, the finger actuatable portion
35 being selectively movable so as to move the interfering portions out of alignment with each other,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

such movement being resiliently provided so as to facilitate the return of the interfering portions into alignment with each other when the valve actuator is released, thus preventing the valve nozzle from opening.

Another embodiment of the invention relates to a fuel cut-off mechanism for use in combination with a lighter which comprises means for normally preventing actuation of a fuel supply; means for selectively permitting actuation of the fuel supply including a depressible valve actuator which upon depression actuates the fuel supply thereby permitting fuel to flow out from the fuel supply; and a latch which normally interferes with depression of the depressible valve actuator, the latch being arranged such that inward movement of the latch provides a void sufficient in size to enable depression of the valve actuator and downward movement of the latch wherein fuel is permitted to flow.

The present invention also relates to an improved lighter of the type having valve means for selectively releasing fuel, means for igniting the fuel, valve actuator means for actuating the valve means so as to release fuel, the valve means including a fuel nozzle which expels fuel when the fuel nozzle is lifted upward by the valve actuator means, wherein the improvement comprises a compensator spring which maintains the fuel nozzle in its downward position when the valve actuator is initially actuated. The compensator spring is preferably positioned between the valve actuator means and a portion of the fuel nozzle so as to urge the fuel nozzle downward. The compensator spring is preferably a metallic coiled

This Sheet Has Been Replaced



spring. The fuel nozzle is preferably normally biased downward by the valve actuator means.

5 In another embodiment, such lighter includes interference means positioned so as to normally interfere with actuation of the valve actuator means, and the compensator spring means compensates for movement of the valve actuator means when the
10 interference means is normally positioned so as to interfere with the actuation of the valve actuator means.

Operation of the lighter requires a certain
15 amount of dexterity and the application of concentrated forces as well as the application of a plurality of forces in multiple directions and in a specified sequence. Additionally, operation of the lighter requires a certain level of cognitive ability.

20 Furthermore, the lighter of the present invention is a passive latching lighter. Advantageously, the lighter automatically returns to its latched configuration once the depressed valve actuator is
25 released. Thus, the lighter is maintained in an at-rest or default configuration which is latched thereby preventing the flow of fuel and the production of a flame.

30 Advantageously, the lighter is adapted for use by right-handed as well as left-handed users with the same relative ease, and is similarly actuated by both right-handed and left-handed users. Furthermore, the user may operate the latch mechanism with the same
35 finger as used to depress the valve actuator without



requiring the user to reposition the lighter in the user's hand.

5 BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features, and advantages of the present invention will become more readily apparent from the following detailed description of the invention in which:

FIG. 1 is a partial perspective view of a preferred embodiment of a selectively actuatable lighter of the present invention in a latched configuration;

FIG. 2 is a partial cross-sectional view of the lighter of Fig. 1 depicting the latch in a latched configuration;

FIG. 3 is an exploded view of the valve actuator and latch depicted in Figs. 1 and 2;

FIG. 4 is a bottom view of the valve actuator depicted in Fig. 3;

FIG. 5 is a bottom view of the latch depicted in Fig. 3;

FIG. 6 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in their latched configuration thereby permitting depression and actuation of the valve actuator;

FIG. 7 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in their



unlatched configuration thereby permitting depression and actuation of the valve actuator;

5 FIG. 8 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in a configuration which is intermediate of the latched and unlatched configurations;

10 FIG. 9 is a schematic diagram depicting a piezoelectric lighter apparatus in which the present invention may be employed and having an optional switch depicted in the open position and a latch means depicted in the latched position to prevent the
15 production of sparks and the flow of fuel;

FIG. 10 is a schematic diagram depicting the piezoelectric lighter of Fig. 9 with the switch depicted in the closed position and the latch means
20 depicted in the unlatched position and depicting a flame;

FIG. 11 is a perspective view of a preferred embodiment of the lighter in an unlatched
25 configuration in which the latch is at its unlatched position thereby permitting depression of the valve actuator so as to permit a valve to open and gas to be released through a fuel nozzle;

30 FIG. 12 is a perspective view of the lighter of Fig. 11 with the valve actuator in a depressed position and the valve open and depicting a flame;

FIG. 13 is a partial cross-sectional view of the
35 preferred embodiment of the lighter in its latched



THIS SHEET HAS BEEN
REPLACED

configuration thereby preventing depression and actuation of the valve actuator;

- 5 FIG. 14 is a partial cross-sectional view of the lighter of Fig. 13 in its unlatched configuration and the valve actuator not depressed and the lighter ready for actuation;
- 10 FIG. 15 is a partial cross-sectional view of the lighter of Fig. 14 in its partially unlatched configuration and the valve actuator fully depressed so as to permit the flow of fuel;
- 15 FIG. 16 is a partial cross-sectional view of the lighter of Fig. 15 in greater detail; and
- 20 FIG. 17 is a partial cross-sectional view of the lighter of Fig. 15 after the valve actuator has been fully depressed and released.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring initially to Fig. 1, there is depicted, in a default or at-rest configuration, the lighter 10 of the present invention comprising a main body portion 12, a depressible valve actuator 14, latch 16, and a spark-producing wheel assembly 18 which includes a toothed surface 19. Advantageously, the default configuration is also a latched configuration in which valve actuator 14 cannot be depressed due to the interference presented by latch 16. Depression of valve actuator 14 permits fuel to flow through a fuel nozzle and to be ignited by sparks produced by toothed surface 19 of spark-producing wheel assembly 18 frictionally engaging a flint. Advantageously, unless

This Sheet Has Been Replaced



latch 16 is positioned away from its depicted at-rest or default position and into a non-interfering position, any attempted depression of valve actuator 14 will not result in the flow of fuel and the lighter will be inoperable. The position of latch 16 as shown in Figs. 1 and 2 may best be characterized as a "default position" under normal conditions.

As will be appreciated, a variety of configurations, shapes and relative positioning exists for the valve actuator and the latch means in which the latch is movable, with respect to the valve actuator, between an interfering or latched position and a non-interfering or unlatched position. The invention will be described in terms of a preferred embodiment in which an illustrative latch normally interferes with depression of the valve actuator when in a latched position, and is movable to an unlatched position in which the valve actuator may be depressed. Preferably, the latch is moved from its latched position to its unlatched position along a single path, which is equally suitable for right-handed as well as left-handed users. Such movement is illustratively in an inward direction. As will be appreciated, for ease of understanding, such inward motion of the latch is deemed to include any inward motion or component thereof of any portion of the latch. The latch is preferably maintained in its unlatched position after being moved there by a user, and preferably automatically returns to its latched position once a user depresses and releases the valve actuator.

A user typically holds the main body portion of a conventional lighter in his hand, rotates with his



thumb the spark-producing wheel in a direction generally toward the depressible surface of the valve actuator to produce a spark, and depresses the valve actuator to allow fuel to pass through the fuel, or valve, nozzle. The spark produced by the wheel ignites the fuel. This is a relatively conventional structure for most lighters, including disposable lighters.

10

Referring now to Fig. 2, there is depicted a cross-section of the lighter of Fig. 1 in a latched configuration. More particularly, valve actuator 14 is mounted between side wall portions 13 (see Fig. 1) which illustratively comprise extensions of the side walls of body portion 12. Illustratively, valve actuator 14 is pivotally mounted to sidewall portions 13. Valve actuator 14 is attached to hollow fuel nozzle 20 slideably supported within a valve housing 28. Hollow fuel nozzle 20 is held within an opening such as a bore in valve actuator 14 by flange 21, compensator spring means 11 and flange extension 23A. Flange 21 and flange extension 23A each has a sufficient size and is configured so as to prevent slippage of nozzle 20 through the bore in valve actuator 14. Additionally, spring means 11 is maintained as shown in Fig. 2 by flange 23 which is attached to fuel nozzle 20 as is flange 21. A compressed spring means 30 resides beneath valve actuator 14 and causes fuel nozzle 20 to be urged downward into valve housing 28 and body portion 12. In particular, compressed spring 30 causes valve actuator 14 to apply force to spring means 11 which supplies force to flange 23, thereby urging nozzle 20 downward into valve housing 28 and body portion 12 and preventing the flow of fuel through nozzle 20.

This Sheet Has Been Replaced

Additionally, downward movement of valve actuator 14 in the vicinity of nozzle 20 is limited by contact between the underside of valve actuator 14 and flange extension 23A. In such an embodiment, valve actuator 14 is employed to lift nozzle 20 by the application of force to flange 21 in order to expel fuel. A valve assembly (not fully shown) is located near the recessed end of nozzle 20 and permits fuel to flow through nozzle 20 only when valve actuator 14 is depressed and nozzle 20 lifted.

As will be appreciated, actuation of valve actuator 14 generally results in upward movement of the valve actuator in the vicinity of nozzle 20. However, in the embodiment depicted in Fig. 2, nozzle 20 remains downward during the initial upward movement of valve actuator 14 in the vicinity of nozzle 20 due to the action of compensator spring 11. More specifically, nozzle 20 only moves upward once the valve actuator in the vicinity of nozzle 20 moves upward a sufficient amount such that a top surface of valve actuator 14 in the vicinity of nozzle 20 contacts flange 21. Advantageously, depression of the valve actuator while the lighter is in a latched configuration, while possibly causing the valve actuator in the vicinity of nozzle 20 to move upward due to, for example, a gap between valve actuator interfering portion 16B and housing interfering portion 12B, will not result in any upward movement of the fuel nozzle. Accordingly, fuel will not be released in the event the valve actuator is depressed while the lighter is in a latched configuration. As will be appreciated, such use of a compensator spring is desirable in lighters which incorporate a gap allowing some depression of a latched valve actuator



which would otherwise release fuel due to such depression.

5 Lighter 10 further comprises a sparking flint 22
mounted within a bore 24 defined by flint and spring
housing 29 in main body 12. Flint 22 is urged toward
toothed surface 19 of wheel assembly 18 by spring 26.
Spark-producing wheel assembly 18, which includes
10 toothed surface 19 which is preferably suitably
hardened and against which flint 22 is urged, is
mounted for rotation between side wall extension
portions 13 in a conventional manner. Toothed surface
19 includes suitable indentations which define teeth
15 such that when spark-producing wheel assembly 18 is
rotated toothed surface 19 cuts against flint 22
causing the generation of ignition sparks.
Additionally, spark-producing wheel assembly 18
includes suitable indentations 17 which facilitate
20 rotation of spark-producing wheel assembly 18 by an
operator's finger.

Main body 12 defines an internal chamber 15 which
is filled with a fuel 9 such as butane fuel capable of
25 vaporizing in a conventional manner to produce a
gaseous medium which passes through fuel nozzle 20
under the control of a valve. Main body 12 is
constructed from any suitable structural material or
materials, and is preferably constructed from a
30 plastic material. A shield 32, preferably constructed
from metal, is provided and functions as a wind guard
around the flame thereby assisting in the ignition of
the fuel.

35 As will be appreciated, main body 12 generally
encompasses any part, portion, structure or

This Sheet Has Been Replaced



substructure of the lighter except for the valve actuator and spring, spark producing wheel assembly, flint and spring, valve assembly, and latch means.

- 5 Accordingly, what will be described as housing interfering portion 12B is deemed to include any such part, portion, etc.

As depicted in Fig. 1 and 2, a notched opening 25
10 is provided in body portion 12 to accommodate valve actuator 14 and latch 16 and, in particular, vertical movement of valve actuator 14 and inward as well as vertical movement of latch 16. As will be appreciated, Figs. 1 and 2 depict the lighter in a
15 latched configuration, i.e., a default configuration. In this latched configuration, latch 16 is positioned between valve actuator 14 and housing 12 and prevents depression of valve actuator 14, thereby preventing actuation of the valve means and thus the release of
20 fuel.

Referring again to Fig. 2, latch 16 is depicted in its latched configuration in which an interfering portion 16A of latch 16 is positioned and configured
25 so as to interfere with and prevent depression of valve actuator 14. More specifically, an interfering portion 14A of valve actuator 14 contacts interfering portion 16A of latch 16 upon attempted depression of valve actuator 14, thus preventing the release of fuel
30 from fuel nozzle 20. In its latched configuration, latch 16 is prevented from any downward travel by the contact between interfering portion 16B of latch 16 and interfering portion 12B of main body 12. Alternatively, any such downward travel of valve
35 actuator 14 may be prevented by another portion of latch 16 contacting another portion of body 12 or



another portion of latch 16 contacting another portion of valve actuator 14. As will be discussed in conjunction with Figs. 3-8, latch 16 is movable inward to mate with valve actuator 14 whereupon latch interfering portion 16B is no longer aligned with housing interfering portion 12B thus enabling depression of valve actuator 14 and downward movement of latch 16 at least partially into a notch or cavity 27 suitably shaped for receiving a portion of latch 16 including a tip portion which in turn includes interfering portion 16B. Preferably, cavity 27 is shaped so as to accommodate the tip portion of latch 16, including interfering portion 16B. A user desiring to actuate the lighter must first force the tip portion of latch 16, and thus interfering portion 16B, out of interference with interfering portion 12B of body 12. This is accomplished by a user moving latch 16 inward such that interfering portion 16B is moved into alignment with cavity 27. Specifically, a user applies a component of force to a finger actuable portion 16C of latch 16 so as to force its tip portion inward and into alignment with cavity 27. As will be discussed in conjunction with Figs. 3-8, once a user moves latch 16 sufficiently inward, the latch will remain inward in its unlatched position until a user depresses and releases the valve actuator.

Referring now to Fig. 3, there is depicted valve actuator 14 and latch 16 in greater detail. Valve actuator 14 comprises a finger depressible surface 31, extensions 36, a nozzle opening such as a bore 38, and valve actuator mating structure 37 (see Figs. 4,6-8). Such mating structure illustratively comprises two protrusions, one located on each of two sides of the



THIS SHEET HAS BEEN REPLACED

valve actuator. Extensions 36 are provided to
matingly engage with bores in side wall portions 13 of
body portion 12 to provide pivotal movement of the
5 valve actuator about extensions 36. Bore 38 is
adapted for receiving and grasping a portion of fuel
nozzle 20 between flanges 21 and 23.

Valve actuator 14 is constructed from material
10 having sufficient dimensional stability and rigidity
to continuously over the life of the lighter assure
proper relative positioning between interfering
portion 14A of valve actuator 14 and interfering
portion 16A of latch 16. Actuator 14 is preferably
15 constructed from zinc or glass-filled polyetherimide.
Other illustrative materials from which valve actuator
14 may be constructed are aluminum and other glass
filled polymers such as polyethersulfone or the like,
as well as combinations of these materials.

20 Latch 16 includes latch mating structure 39.
Such mating structure is shaped, configured,
positioned and adapted to releasably mate (i.e. engage
and disengage) with valve actuator mating structure
25 37. Illustratively, such latch mating structure
comprises two indentations, one located on respective
inner surfaces of each of two sides of the latch.

As will be appreciated, mating structures 37 and
30 39 may take on a variety of shapes, positions and
configurations. Their specific structure is not
critical to the present invention. Additionally, each
of structures 37 and 39 can comprise any reasonable
number (including one) of separate structures. For
35 example, valve actuator mating structure 37 may
comprise the embodiment depicted in Figs. 3-8, while

This Sheet Has Been Replaced



-27-

THIS SHEET HAS BEEN
REPLACED

latch mating structure 39 may comprise four indentations, two located on respective inner surfaces of each of two sides of the latch. In such an embodiment, valve actuator mating structure 37 would engage with two indentations of latch mating structure 39 when in a latched configuration as well as when in an unlatched configuration. As will be described in conjunction with Figs. 6-8, one preferred embodiment of the lighter will have structure 37 mating with structure 39 when the lighter is in its unlatched configuration.

Latch 16 is preferably constructed from relatively rigid and somewhat flexible material which is sufficiently resilient to permit temporary widening of the distance between the two indentations of mating structure 39 so as to engage and disengage from structure 37 of the valve actuator during movement of latch 16 between its latched position and its unlatched position. Latch 16 is preferably constructed from any sufficiently resilient plastic or metal, although a wide variety of other suitable materials having a sufficient degree of rigidity and elastic memory may be employed.

In the latched or closed configuration (Figs. 1 and 2), an upper surface of interfering portion 16A of latch 16 abuts a lower surface of interfering portion 14A of valve actuator 14, and a lower surface of interfering portion 16B of latch 16 abuts an upper surface of interfering portion 12B of body 12, thereby preventing depression of valve actuator 14. Alternatively, a small gap (Figs. 1 and 2) may be provided such as between the lower surface of

This Sheet Has Been Replaced



interfering portion 16B of latch 16 and the upper surface of interfering portion 12B of latch 12.

5 Referring again to Fig. 3, latch 16 is slideably attached to valve actuator 14 by way of groove 33 formed in actuator 14. Such slideable attachment, as well as the relative shapes and configurations of groove 33 and the portion of latch 16 which slides
10 within groove 33, enables latch 16 to move outward relative to valve actuator 14, but prevents vertical movement of latch 16 relative to valve actuator 14.

Referring now to Fig. 4, there is depicted a view
15 of the underside of valve actuator 14 of Fig. 3. A portion 35 of valve actuator 14 is adapted to receive spring 30 as depicted in Fig. 2 and may take on a variety of forms such as a protruding member or, alternatively, an indentation or bore partially into
20 valve actuator 14. The fuel nozzle is illustratively maintained in bore 38 by fuel nozzle flanges 21 and 23 and spring means 11 (Fig. 2) which have a diameter greater than that of a corresponding portion of bore 38.

25 Fig. 5 depicts the underside of latch 16 of Fig. 3. The size, shape, and configuration of latch 16 facilitates retention of the lighter in an unlatched configuration as well as stabilization of latch 16
30 within the lighter, and assures proper positioning and retention of latch 16 in notched opening 25 especially when the latch is moved. Finger actuatable portion 16C of latch 16 is employed by a user to move the latch and, in particular, to move its interfering
35 portion 16B inward so as to become aligned with cavity 27 of housing 12.



Figs. 6, 7 and 8 are each cross-sectional views of the valve actuator and latch of Fig. 3 when in their latched (Fig. 6), unlatched (Fig. 7) and intermediate (Fig. 8) configurations. More specifically, Fig. 6 depicts latch 16 in its latched position in which latch mating structure 39 is out of engagement with valve actuator mating structure 37. As will be appreciated, latch 16 is preferably under no loading as it is depicted in Fig. 6.

Fig. 7 depicts latch 16 in its unlatched position in which latch mating structure 39 is in engagement with, or mated with, valve actuator mating structure 37. As will be appreciated, latch 16 is preferably under no loading as it is depicted in Fig. 7.

Advantageously, latch 16 may only be moved from its latched position to its unlatched position by an external force, i.e., a force applied by a user to latch 16. Such force must be sufficient to cause the distance between the two indentations of structure 39 of latch 16 to widen such that structures 37 and 39 engage. Accordingly, absent the application of such force, the lighter of the present invention is normally maintained in its latched configuration.

As will be appreciated, latch 16 is under loading only during the transition between its latched position and its unlatched position. Accordingly, latch 16 may be constructed from a relatively wide choice of materials which do not necessarily have to be able to withstand constant loading. Additionally, due to the relative materials from which valve actuator 14 and latch 16 are constructed, and due to their relative shapes and configurations, only latch



THIS SHEET HAS BEEN
REPLACED

16 is deformed during the transition between its latched and unlatched positions. In the preferred embodiment illustrated in Figs. 6-8, such deformation comprises a temporary widening of the distance between the two indentations of mating structure 39. Moreover, latch 16 cannot be placed in and maintain a position which is intermediate that of the latched and unlatched positions.

10

Referring now to Fig. 8, valve actuator 14 and latch 16 are depicted in a configuration which is intermediate the latched configuration of Fig. 6 and the unlatched configuration of Fig. 7. As depicted in Fig. 8, latch 16 is under loading and is temporarily deformed. The configuration depicted in Fig. 8 occurs for a brief period of time as latch 16 is moved from its latched position to its unlatched position, and from its unlatched position to its latched position. As will be appreciated, the configuration depicted in Fig. 8 can not be self-maintained. Specifically, due to the component of force exerted by the valve actuator on the latch, the latch is biased toward the right of Fig. 8, away from the valve actuator and toward its latched position. In other words, latch 16 is squeezed away from valve actuator 14 in the configuration depicted in Fig. 8. Such biasing enables the lighter to automatically return to its latched configuration once the lighter is actuated. Of course, no such biasing exists in the configurations depicted in Figs. 6 or 7 since latch 16 is not under any loading in its latched (Fig. 6) and unlatched (Fig. 7) positions.

35 Advantageously, the materials and configurations of valve actuator 14 and latch 16 as well as their

This Sheet Has Been Replaced



shapes cause valve actuator 14 to force latch 16 away from actuator 14 for all positions of the latch between the two extreme positions depicted in Figs. 6 and 7 thereby biasing the latch into its latched position once it becomes disengaged from the actuator.

Additionally, such materials, configurations and shapes facilitate retention of the lighter and, in particular, latch 16, in an unlatched or non-interfering position or configuration once the latch is placed in such an unlatched position or configuration, and until valve actuator 14 is depressed and released.

Fig. 9 schematically depicts a piezoelectric type lighter in which the present invention may be employed. The piezoelectric lighter comprises hammer and fuel release means 64, spark providing means 66, optional electrical cut-off switch 68, latch means 70 and valve means 71. The piezoelectric lighter operates in a conventional manner except for depression of hammer means 64 which is prevented by inclusion of latch means 70 operative in accordance with the present invention. Illustratively, such latch means comprises a latch which prevents the production of sparks. In particular, latch means 70 may prevent the production of sparks by electrically and/or mechanically isolating an energy source from the spark producing means. Alternatively, the latch means may be arranged to selectively prevent only the flow of fuel or it may be arranged to selectively prevent both the production of sparks and the flow of fuel. As depicted in Fig. 9, the lighter is in a latched configuration since latch means 70 is positioned so as to prevent actuation of hammer means 64. Additionally, switch 68 is depicted in an open,



or off, position. As will be appreciated, incorporation of optional switch 68 requires that it be closed and that latch means 70 be unlatched in order for fuel to be ignited.

Fig. 10 schematically depicts the piezoelectric type lighter of Fig. 9 in an unlatched configuration. In particular, latch means 70 is positioned so as to enable actuation of hammer means 64. Additionally, switch 68 is depicted in a closed, or on, position. As will be appreciated, incorporation of optional switch 68 requires that it be closed and that latch means 70 be unlatched in order for fuel to be ignited.

Advantageously, the present invention automatically returns the latch to its latched position after the lighter has been activated and, in particular, after the valve actuator has been depressed and released. The biasing force described in conjunction with Fig. 8 facilitates such automatic return, as does a camming means 5 which is depicted in Figs. 1, 11 and 12 as a ramp on each side of the lighter. The ramps are preferably integrally formed with housing 12. Such automatic return will now be further described in conjunction with Figs. 1, 11 and 12.

In operation of the present invention, and as depicted in Figs. 1, 11 and 12, a user must first move latch 16 in an inward direction (Fig. 11) so as to sufficiently displace interfering portion 16B of latch 16 out of interference with interfering portion 12B of housing 12, and at least partially align interfering portion 16B of latch 16 with cavity 27 in housing 12 so as to ultimately permit depression of valve



relative to valve actuator 14. Accordingly, such
downward movement forces latch structure 39 to
disengage from actuator structure 37, and latch 16 to
5 move outward toward its latched position.
Additionally, and as described in conjunction with
Figs. 6-8, the outward movement of latch 16 is also
due to the relative shapes, materials and
configurations of valve actuator 14 and latch 16 which
10 cause valve actuator 14 to force latch 16 outward.
The outward movement of latch 16 from its unlatched
position (Fig. 11) to its latched position (Fig. 1),
in the preferred embodiment, may generally be
considered to be initially due to camming means 5
15 which serves to disengage latch 16 and actuator 14,
and then due to forces exerted by actuator 14 onto
latch 16.

Thus, the presently preferred embodiment of the
20 invention may be placed in an unlatched configuration
from its default latched configuration by sufficiently
displacing interfering portion 16B relative to
interfering portion 12B. This may be accomplished by
moving interfering portion 16B into engagement or
25 alignment with cavity 27 thereby causing latch
structure 39 to engage valve actuator structure 37.
Advantageously, the path defined by such movement is
the same for right-handed and left-handed users, and
each of such users may unlatch the lighter with the
30 same relative ease. Thus, the lighter of the present
invention enables every user, whether right-handed or
left-handed, to actuate the lighter by suitably urging
the latch out of interference with the lighter body,
and does not require separate paths or structures to
35 accommodate right-handed and left-handed users.



More specifically, by providing a single path for latch 16 to follow as the lighter is reconfigured from the latched configuration to the unlatched configuration, which path does not favor either of right-handed or left-handed users more than the other, although both such users employ the same path, such users will feel equally comfortable in actuating the lighter without detracting from the effectiveness of the lighter's latch.

Figs. 13-17 depict the sequence of operations required for the unlatching of the lighter by positioning interfering portion 16B in cavity 27 of housing 12. In particular, Fig. 13 depicts latch 16 and valve actuator 14 in the default or latched configuration. As will be appreciated, each of Figs. 6 and 13 depict the latch and the valve actuator in the same latched configuration. In this configuration, depression of valve actuator 14 by finger pressure on surface 31 is prevented by the contact between interfering portion 14A of valve actuator 14 and interfering portion 16A of latch 16 as well as the contact between interfering portion 16B of latch 16 and interfering portion 12B of housing 12. As depicted in Fig. 13, valve actuator 14 and latch 16 are prevented from any further downward movement since interfering portion 16B of latch 16 abuts interfering portion 12B of body 12, except for a small gap thereinbetween. For ease of illustration, the gap between portions 16B and 12B in the figures is not necessarily drawn to scale. Additionally, such a gap is not necessary for proper operation of the invention.

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

-36-

Fig. 14 depicts latch 16 and valve actuator 14 in an unlatched configuration ready for depression of valve actuator 14. As will be appreciated, each of
5 Figs. 7 and 14 depict the latch and valve actuator in the same unlatched configuration. Latch 16 including its interfering portion 16B have been moved inward as indicated by the arrow into alignment with cavity 27 which is illustratively formed in housing 12.
10 Advantageously, due to the engagement of valve actuator mating structure 37 with latch mating structure 39 (Fig. 7) when latch 16 is moved sufficiently inward, removal of holding pressure from finger actuatable portion 16C will not result in latch
15 16 slipping toward its latched position but will maintain the lighter in the unlatched configuration depicted in Fig. 14, until valve actuator 14 is depressed. In other words, the lighter may be readied for actuation and flame production by applying
20 suitable force to finger actuatable portion 16C to move latch 16 including interfering portion 16B in an inward direction so as to cause valve actuator mating structure 37 to engage latch mating structure 39 thereby placing interfering portion 16B into alignment
25 with cavity 27.

Application of finger pressure to the finger depressible surface of valve actuator 14 as depicted in Fig. 14 will yield the configuration depicted in
30 Fig. 15 in which valve actuator 14 has been depressed thereby permitting fuel to flow through the valve and the fuel nozzle (not shown). In particular, and as more clearly depicted in Fig. 16, such depression of valve actuator 14 will cause compression of spring 30
35 and urging of fuel nozzle 20 upward and partially out of valve housing 28 and body portion 12. Such lifting

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

-37-

of fuel nozzle 20 upward will permit fuel to flow from chamber 15 through the valve and out of nozzle 20 whereupon it will have been ignited by sparks produced
5 by flint 22 and toothed surface 19 of spark-producing assembly wheel 18. Such fuel will continue to flow and burn as long as sufficient pressure is maintained on valve actuator 14. The downward movement of valve actuator 14 is limited by latch interfering portion
10 16B contacting a portion of housing 12 in the vicinity of cavity 27 and adjacent to housing interfering portion 12B, as depicted in Figs. 15 and 16.

As seen in Figs. 15 and 16, depression of valve
15 actuator 14 urges latch 16 downward as well as outward toward its latched position. As long as valve actuator 14 remains depressed, such outward movement is limited by the contact between latch 16 and housing 12 in the general vicinity of portions 12B and 16B.
20 Such outward movement is initially due to the contact between latch 16 and camming means 5 (Figs. 1, 11, 12) as the latch is moved downward. Such contact causes latch 16 to disengage from actuator 14 by disengaging latch structure 39 from actuator structure 37 causing
25 latch 16 to move outward. The outward movement of latch 16 is also due to the relative shapes, materials and configurations of valve actuator 14 and latch 16 which cause actuator 14 to force latch 16 outward as described in conjunction with Figs. 6-8. Accordingly,
30 latch 16 is urged outward by camming means 5 as well as valve actuator 14.

As depicted in Fig. 17, once pressure is removed from valve actuator 14, the valve actuator will move
35 upward due to the biasing force provided by spring 30, and the flame will be extinguished. Advantageously,

This Sheet Has Been Replaced



as valve actuator 14 moves upward, latch 16 moves toward its latched position. Additionally, as valve actuator 14 moves upward so does latch 16 due to the
5 portion of latch 16 which is within groove 33 of valve actuator 14 (Fig. 3). As described in conjunction with Figs. 15 and 16, depression of valve actuator 14 causes latch 16 to move outward and to disengage from actuator 14 by disengaging latch structure 39 from
10 actuator structure 37. However, even when valve actuator 14 is fully depressed, latch 16 is not fully outward and not fully latched due to the interference between the latch and the housing in the vicinity of housing interference portion 12B and latch interfering
15 portion 16B as best seen in Figs. 15 and 16. Latch 16 will enter its fully latched position only when the valve actuator is moved fully upward thus enabling the latch to move fully outward. As described in conjunction with Figs. 6-8 as well as Figs. 15 and 16,
20 the relative shapes, materials and configurations of valve actuator 14 and latch 16 cause actuator 14 to force latch 16 fully outward.

While it is apparent that the invention herein
25 disclosed is well-calculated to fulfill the objects above stated, it will be appreciated that numerous modifications and embodiments may be devised by those skilled in the art, and it is intended that the appended claims cover all such modifications and
30 embodiments as fall within the true spirit and scope of the present invention.

More specifically, the latch means and lighter disclosed and claimed herein are not limited to use in
35 disposable lighters. Moreover, the present invention is not limited to a latch means in which a latch is



-39-

THIS SHEET HAS BEEN REPLACED

5 moved solely in an inward direction to an unlatched position. Similarly, the latch may be positioned at other locations within the lighter body so as to prevent depression of the valve actuator by interfering with other portions of the valve actuator.

10

15

20

25

30

35

This Sheet Has Been Replaced

THE CLAIMS



1. A lighter comprising:
a housing defining a fuel reservoir;
valve means for releasing fuel from said fuel reservoir;
means for igniting the released fuel;
actuator means operatively engaged with said valve means such that fuel is released when said actuator means is depressed along a longitudinal axis of said housing;

interference means for preventing the movement of said actuator means along the longitudinal axis of said housing when in a closed position, said interference means being selectively movable inward towards the longitudinal axis to an open position out of interference with said actuator means, thereby allowing said actuator means to be depressed, and said interference means including an extending, resiliently deformable portion cooperating with a mating element for securing the interference means in the open position wherein said deformable portion is in a relaxed and undeformed condition in the open position, said portion being deformed by the mating element as the interference means is moved inward and returning to the undeformed condition and being under no loading when in said closed position; and

camming means operatively engaging said interference means when said actuator means is depressed for moving said interference means outward away from said longitudinal axis into the closed position, said deformable portion being deformed by the mating element during such outward movement.

2. The lighter according to claim 1 wherein said actuator means includes protrusion means on either side thereof forming said mating element, and said interference means includes corresponding indentation means formed on said resiliently deformable portion for mating with said protrusion means, said interference means normally retained in said closed position by resiliently interfering with said actuator means.

This Sheet Has Been Replaced



PENY2-328069.1



3. The lighter according to claim 2 wherein said interference means is retained in said open position by said protrusion means resiliently mating with said indentation means.

4. The lighter according to claim 3 wherein said interference means is a latch having an interfering portion which is movable inward towards the longitudinal axis of said housing into alignment with a cavity in said housing.

5. The lighter according to claim 4 wherein said latch is slideably mounted to said valve actuator.

6. The lighter according to claim 3 wherein said means for igniting comprises flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

7. The lighter according to claim 3 wherein said means for igniting comprises electric spark-producing means.

8. The lighter according to claim 3 wherein said means for igniting comprises piezoelectric spark-producing means.

9. The lighter according to claim 1 wherein said interference means is movable along only a single path from said closed position to said open position.

10. A lighter normally maintained in a latched configuration comprising:
a housing having a longitudinal axis;
fuel supply means for supplying fuel;
ignition means for igniting said fuel;
valve means for controlling the flow of said fuel;
a valve actuator operatively engaged with said valve means, said valve actuator preventing the flow of said fuel when in a first position, said valve actuator





being depressible along said longitudinal axis into a second position to permit the flow of fuel;

a latch member separate from the valve actuator and positioned at least partially beneath said valve actuator in a first position normally preventing said valve actuator from being depressed into said second position by interfering with the movement thereof along the longitudinal axis of said housing,

wherein inward movement of said latch towards the longitudinal axis of said housing enables an interfering portion of said latch to become aligned with a cavity in said housing, and places said lighter in an unlatched configuration, said cavity being sufficient in size to accommodate said interfering portion so as to enable said valve actuator to be depressed; and

camming means, comprising an upright surface of the lighter housing disposed to interfere with the latch member in the unlatched configuration when the valve actuator is depressed, for forcing said latch outward away from said longitudinal axis into its first position and the lighter out of its unlatched configuration when said valve actuator is depressed, moving said latch downward along a direction parallel to the longitudinal axis and into contact with said upright surface.

11. The lighter according to claim 10 wherein said ignition means comprises a spark-producing wheel and a flint urged against said wheel and wherein sparks are produced by rotation of said wheel.

12. The lighter according to claim 10 wherein said ignition means comprises electric spark-producing means.

13. The lighter according to claim 10 wherein said ignition means comprises piezoelectric spark-producing means.

14. The lighter according to claim 10 wherein said latch is constrained to move along only a single path when said lighter is configured from said latched configuration to said unlatched configuration.





15. The lighter according to claim 10 wherein said lighter is maintained in each of said latched and unlatched configurations by the interaction between said latch and said valve actuator.

16. The lighter according to claim 10 wherein said latch is slideably attached to said valve actuator between said latched and unlatched configurations.

17. The lighter according to claim 16 wherein said latch is under no loading in each of said latched and said unlatched configuration.

18. A lighter comprising:

a housing having a fuel compartment;

fuel release means for releasing fuel from said fuel compartment;

means for igniting said released fuel;

a thumb-depressible actuator operatively engaged with said release means such that when depressed along a longitudinal axis of said housing fuel is released, said actuator having protrusions on either sides thereof;

a U-shaped latch disposed between said actuator and a portion of said housing for preventing said actuator from being depressed by abutting at least a portion of said housing, said latch having indentations on either sides thereof, said latch being selectively movable inward towards the longitudinal axis of said housing such that said protrusions engage and mate with said indentations thereby holding said latch inward,

wherein said movement inward produces a void between said latch and said housing, said void sufficient in size to allow said actuator to be depressed so as to allow fuel to be released from said fuel compartment; and

camming means operatively engaged with said latch when said latch is in its inward position and when said actuator is depressed for disengaging said protrusions from said indentations thereby allowing said latch to move outward away from the longitudinal axis of said housing.

This Sheet Has Been Replaced



19. The lighter according to claim 18 wherein said latch is slideably attached to said actuator.

20. The lighter according to claim 18 wherein said means for igniting includes flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

21. The lighter of claim 18 wherein said means for igniting includes electric spark-producing means.

22. The lighter of claim 18 wherein said means for igniting includes piezoelectric spark-producing means.



This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

THE CLAIMS

We Claim:

1. A flame producing lighter which comprises:
 - 5 a housing defining a reservoir for containing fuel under pressure;
valve means arranged for selective actuation between a normally closed position which prevents exit of said fuel from said reservoir, and an open position
10 which permits exit of said fuel from said reservoir through said valve means;
means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition
15 of said fuel;
means normally positioned for preventing actuation of said valve means to the open position, said valve actuation prevention means being incapable of vertical movement when in said normal position,
20 said valve actuation means being movable out of said normal position inward into a second position only by application of an external force, said valve actuation prevention means being capable of vertical movement when in said second position; and
25 means for selectively moving said valve actuation prevention means to said second position whereby actuation of said valve means to the open position is permitted thereby selectively permitting exit of said fuel from said valve means and ignition
30 of said fuel by sparks produced by said spark producing means,
wherein said valve actuation prevention means automatically returns to said normal position after actuation of said lighter.

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

2. The flame producing lighter according to claim 1 wherein said valve means is actuated to the open position by actuator means and said means for preventing actuation of said valve means to the open position comprises interference means for preventing movement of said actuator means, said valve actuation interference means being selectively movable to said second position out of interference with said valve actuator means, and said valve actuation prevention means being under no loading when in each of said normal and said second positions.

3. The flame producing lighter according to claim 2 wherein said valve actuation interference means is normally retained in a valve actuation interference position by its interaction with said actuator means, the movement thereof to said second position out of interference with said valve actuator means being resiliently provided.

4. The flame producing lighter according to claim 3 wherein said valve actuation interference means is retained in said second position by its interaction with said actuator means, the movement thereof from said valve actuation interference position to said second position being resiliently provided.

5. The flame producing lighter according to claim 4 wherein the resilient movement of said valve actuation interference means facilitates the return of said valve actuation interference means to its interfering position once the valve actuator is released, thus preventing the valve means from opening.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

6. The flame producing lighter according to claim 5 wherein said valve actuation interference means is a latch having an interfering portion which is movable inward into alignment with a cavity in said housing, whereby fuel exits said valve means upon depression of said valve actuator, and the latch moves back to its interfering position after the valve actuator is depressed and released.

10

7. The flame producing lighter according to claim 6 wherein said latch is slideably mounted to said valve actuator.

8. The flame producing lighter according to claim 6 wherein, upon depression of said valve actuator, said latch is cammed out of its second position by a camming means formed within said housing.

20

9. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

10. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises electric spark-producing means.

11. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises piezoelectric spark-producing means.

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

12. The flame producing lighter according to claim 1 further comprising means to retain said valve actuation prevention means in said second position.

5

13. The flame producing lighter according to claim 1 wherein said valve actuation prevention means is movable along only a single path from said normal position to said second position, said single path
10 being equally suitable for right-handed as well as left-handed users.

14. A flame producing lighter resistant to unauthorized use and normally maintained in a latched
15 configuration comprising:

a housing;

fuel supply means for supplying fuel to be ignited;

ignition means for igniting said fuel;

20 valve means for controlling the flow of said fuel;

a valve actuator which normally prevents the flow of said fuel when in a first position and is depressible to a second position which permits
25 actuation of said fuel supply means thereby permitting fuel to flow out from said fuel supply means;

a latch positioned so as to normally prevent depression of said depressible valve actuator and normally maintain said lighter in said latched
30 configuration,

wherein inward movement of said latch enables a tip portion of said latch to become aligned with a cavity in said housing, said cavity being sufficient in size to accommodate said tip portion so
35 as to enable said valve actuator to be depressed, and

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

wherein said inward movement places said lighter in an unlatched configuration in which said valve actuator is capable of being depressed, thereby
5 permitting fuel to flow.

15. The flame producing lighter according to claim 14 wherein said ignition means comprises a spark-producing wheel and a flint urged against said
10 wheel and wherein sparks are produced by rotation of said wheel.

16. The flame producing lighter according to claim 14 wherein said ignition means comprises
15 electric spark-producing means.

17. The flame producing lighter according to claim 14 wherein said ignition means comprises piezoelectric spark-producing means.
20

18. The flame producing lighter according to claim 14 wherein said latch is constrained to move along only a single path when said lighter is configured from said latched configuration to said
25 unlatched configuration.

19. The flame producing lighter according to claim 14 wherein said lighter is maintained in each of said latched and unlatched configurations by the
30 interaction between said latch and said valve actuator.

20. The flame producing lighter according to claim 14 wherein said latch is slideably attached to
35 said valve actuator between said latched and unlatched configurations.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

21. The flame producing lighter according to claim 20 wherein said latch is under no loading in each of said latched and said unlatched configuration.

5

22. The flame producing lighter according to claim 14 wherein depression of said valve actuator forces said latch downward and wherein a camming means forces said latch outward and the lighter out of its unlatched configuration.

10

23. The flame producing lighter according to claim 14 wherein said latch comprises a portion normally positioned between at least a portion of said valve actuator and at least a portion of said housing.

15

24. The flame producing lighter according to claim 14 wherein said unlatched configuration is maintained until said valve actuator is depressed and released.

20

25. A flame producing lighter which comprises:
a housing defining a reservoir for containing a combustible gaseous medium under pressure;

25

valve means;

means mounted for selective actuation of said valve means between a normally closed position which prevents exit of said gaseous medium from said reservoir, and an open position which permits exit of said gaseous medium from said reservoir through said valve means;

30

means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition of said gaseous medium; and

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

a latch having a finger actuatable portion and an interfering portion connected thereto, said latch being positioned so as to interfere with the movement of said valve actuation means for preventing actuation of said valve means to the open position, said finger actuatable portion being movable so as to move said latch interfering portion out of interference with said housing and into alignment with a cavity of said housing only by application of an external user applied force.

26. The flame producing lighter according to claim 25 wherein said finger actuatable portion of said latch is movable inward so as to move said latch interfering portion into alignment with said cavity.

27. The flame producing lighter according to claim 25 wherein said finger actuatable portion is constrained to move along only a single path as said latch interfering portion is moved out of interference with said housing portion.

28. The flame producing lighter according to claim 25 wherein depression of said valve actuation means forces said latch downward and against a camming means thereby forcing said latch outward.

29. The flame producing lighter according to claim 25 wherein said latch is retained in each of its interfering and non-interfering positions by the interaction between said latch and said valve actuation means.

30. The flame producing lighter according to claim 25 wherein said latch is slideably attached to

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

said valve actuation means and is capable of being depressed into said cavity only when in said out of interference position.

5

31. The flame producing lighter according to claim 25 wherein said interfering portion of said latch is positioned between at least a portion of said valve actuation means and at least a portion of said housing.

10

32. The flame producing lighter according to claim 25 further comprising means to retain said latch interfering portion in said out of interference position until said valve means is moved to the open position.

15

33. The flame producing lighter according to claim 25 wherein said latch is under no loading in each of its interference and non-interference positions.

20

34. A flame producing lighter which comprises:
a housing defining a reservoir for
containing a combustible gaseous medium under pressure, said housing including a first interfering portion;

25

valve means;

actuator means arranged for selective
actuation of said valve means between a normally closed position which prevents exit of said gaseous medium from said reservoir and an open position which permits exit of gaseous medium from said reservoir through said valve means;

30

means for preventing movement of said
actuator means by interfering with the movement

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

thereof, having a finger actuatable portion and a second interfering portion, said first and second interfering portions being normally in alignment with each other thereby preventing movement of said actuator means, said finger actuatable portion being selectively movable so as to move said second interfering portion out of alignment with said first interfering portion, said second interfering portion being normally retained in a valve actuation interference position, the movement thereof to a position out of interference with said first interfering portion being resiliently provided so as to facilitate return of said second interfering portion to its position in interference with said first interfering portion when said valve actuator is depressed and released, thus preventing said valve nozzle from opening;

means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition of said gaseous medium; and

means for retaining said second interfering portion out of alignment with said first interfering portion.

35. The flame producing lighter according to claim 34 wherein said movement of said finger actuatable portion which causes said second interfering portion to move out of alignment with said first interfering portion is constrained to movement in a single path.

36. The flame producing lighter according to claim 34 wherein said movement of said finger actuatable portion which causes said second

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

interfering portion to move out of alignment with said first interfering portion comprises movement in an inward direction.

5

37. The flame producing lighter according to claim 34 wherein said valve actuator prevention means is retained in each of its interference and non-interference positions by its interaction with said actuator means.

10

38. The flame producing lighter according to claim 37 wherein said valve actuator prevention means is under no loading in each of its interference and non-interference positions.

15

39. The flame producing lighter according to claim 37 wherein said valve actuator prevention means is slideably attached to said actuator means.

20

40. The flame producing lighter according to claim 37 further comprising camming means to force said valve actuator prevention means out of its non-interference position and toward its interference position upon depression of said valve actuator.

25

41. A fuel cut-off mechanism for use in combination with a lighter which comprises:

means for normally preventing actuation of a fuel supply;

30

means for selectively permitting actuation of said fuel supply including a depressible valve actuator which upon depression actuates said fuel supply thereby permitting fuel to flow out from said fuel supply; and

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

a latch which normally interferes with depression of said depressible valve actuator, said latch being arranged such that inward movement of said latch provides a void, the void being sufficient in size to enable depression of said valve actuator and downward movement of said latch.

42. The fuel cut-off mechanism of claim 41 wherein said latch and said valve actuator include means to maintain said latch in said interfering position under no load.

43. The fuel cut-off mechanism of claim 41 wherein said latch and said valve actuator include means to maintain said latch in said non-interfering position under no load.

44. The fuel cut-off mechanism of claim 41 wherein at least a portion of said latch is normally positioned between at least a portion of said valve actuator and at least a portion of a main body housing of said lighter so as to normally interfere with depression of said valve actuator.

45. A flame developing lighter comprising:
(a) a housing;
(b) fuel supply means for supplying fuel to be ignited;
(c) ignition means for igniting said fuel;
(d) valve means for selectively permitting flow of said fuel; and
(e) means for selectively unlatching said lighter from a normally latched configuration in which fuel is prevented from flowing, said means for selectively unlatching said lighter including:

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

(i) a valve actuator which normally prevents release of fuel from said fuel supply when in a first position and is depressible to a second
5 position which permits release of said fuel thereby permitting fuel to flow out from said fuel supply means; and

(ii) a latch which normally prevents depression of said depressible valve actuator, said
10 latch having an interfering portion being normally positioned in alignment with an interfering portion of said housing thereby preventing depression of said valve actuator,

wherein inward movement of said interfering
15 portion of said latch moves said interfering portion of said latch out of alignment with said interfering portion of said housing, said latch experiencing no loading when in said out of alignment position, and provides said lighter in an unlatched configuration in
20 which said valve actuator is capable of being depressed, thereby permitting fuel to flow.

46. The flame developing lighter according to claim 45 wherein said latch experiences no loading
25 when in said interfering position.

47. A flame producing lighter which comprises:
a housing;
a reservoir within said housing for
30 containing a combustible gaseous medium under pressure;

valve means;
a depressible valve actuator which actuates said valve means between a normally closed
35 position which prevents exit of said gaseous medium from said reservoir, and an open position which

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

permits exit of gaseous medium from said reservoir
through said valve means;

means for selectively producing sparks
5 at a location proximate the gaseous medium exit
opening of said valve means thereby selectively
causing ignition of said gaseous medium;

an interference member, at least a
portion of which is normally under no loading and
10 positioned so as to prevent depression of said valve
actuator, said interference member having a finger
actuatable portion wherein application of a suitable
biasing force in an inward direction by a user to said
finger actuatable portion places said lighter in an
15 unlatched configuration enabling depression of said
valve actuator;

means for retaining said interference
member in the valve actuation position at least until
said valve actuator is depressed; and

20 means for returning said interference
member to the valve actuation prevention position once
said valve actuator is depressed and released, said
retaining means including camming means for camming
said interference member toward its actuation
25 prevention position.

48. The flame producing lighter according to
claim 47 wherein at least a portion of said
interference member is normally positioned between at
30 least a portion of said valve actuator and at least a
portion of said housing.

49. The flame producing lighter according to
claim 47 wherein said unlatched configuration is
35 maintained with said interference member under no
loading.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

50. A flame producing lighter which comprises:

a housing;

a reservoir within said housing for
containing a combustible gaseous medium under
pressure;

valve means for selectively permitting
flow of said combustible gaseous medium;

a valve actuator mounted for selective
actuation of said valve means between a normally
closed position which prevents exit of said gaseous
medium from said reservoir, and an open position which
permits exit of gaseous medium from said reservoir
through said valve means;

means for selectively producing sparks
at a location proximate the gaseous medium exit
opening of said valve means thereby selectively
causing ignition of said gaseous medium; and

an interference member configured,
dimensioned and adapted to normally interfere with
said valve actuator for preventing actuation of said
valve means to the open position, said interference
member being movable out of interference with said
valve actuator by application of a user applied force
in an inward direction and being returnable
automatically to said valve actuation prevention
position after said valve means is moved to the open
position and said valve actuator released,

wherein said movement of said
interference member provides a void between a portion
of said valve actuator and a portion of said housing
to enable said valve actuator to be depressed, and

wherein said member normally interferes
with said valve actuator by normally being precluded
from moving downward, and moveable solely in an inward

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

direction so as to subsequently be permitted to move downward upon depression of said valve actuator.

5 51. The flame producing lighter of claim 50 wherein said member is movable inward from said interfering position to said non-interfering position.

10 52. The flame producing lighter of claim 50 wherein said inward movement of said interference member places said lighter in an unlatched configuration in which said interference member is retained in its inward position at least until said valve actuator is depressed.

15 53. The flame producing lighter of claim 50 wherein at least a portion of said interference member is normally positioned between at least a portion of said valve actuator and at least a portion of said housing.

20 54. An improved lighter of the type having valve means for selectively releasing fuel, means for igniting said fuel, valve actuator means for actuating
25 said valve means so as to release fuel, and interference means positioned so as to normally interfere with the actuation of said valve actuator means, said valve means including a fuel nozzle which expels fuel when said fuel nozzle is lifted upward by
30 said valve actuator means, wherein the improvement comprises a compensator spring means to compensate for movement of said valve actuator means when said interference means is normally positioned so as to interfere with the actuation of said valve actuator
35 means.

This Sheet Has Been Replaced





-55-

THIS SHEET HAS BEEN
REPLACED

55. The improved lighter of claim 54 wherein
said compensator spring means is positioned between
said valve actuator means and a portion of said fuel
5 nozzle so as to urge said fuel nozzle downward.

56. The improved lighter of claim 54 wherein
said compensator spring means is a metallic coiled
spring.

10

57. An improved lighter of the type having valve
means for selectively releasing fuel, means for
igniting said fuel, and means for actuating said valve
means so as to release fuel, said valve means
15 including a fuel nozzle which expels fuel when said
fuel nozzle is lifted upward by said valve actuator
means, said fuel nozzle being normally biased downward
by said valve actuator means, wherein the improvement
comprises a compensator spring means which maintains
20 said fuel nozzle in its downward position when said
valve actuator is initially actuated.

58. The improved lighter of claim 57 wherein
said compensator spring means is positioned between
25 said valve actuator means and a portion of said fuel
nozzle so as to urge said fuel nozzle downward.

59. The improved lighter of claim 57 wherein
said compensator spring means is a metallic coiled
30 spring.

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

4. The lighter according to claim 1 wherein said said actuator means includes protrusion means on either sides thereof, and said interference means
5 includes corresponding indentation means for mating with said protrusion means, said interference means normally retained in said closed position by resiliently interfering with said actuator means.

10 5. The lighter according to claim 4 wherein said interference means is retained in said open position by said protrusion means resiliently mating with said indentation means.

15 6. The lighter according to claim 5 wherein said interference means is a latch having an interfering portion which is movable inward towards the longitudinal axis of said housing into alignment with a cavity in said housing.

20 7. The lighter according to claim 6 wherein said latch is slideably mounted to said valve actuator.

25 8. The lighter according to claim 5 wherein said means for selectively producing sparks comprises flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

30 9. The lighter according to claim 5 wherein said means for selectively producing sparks comprises electric spark-producing means.

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

10. The lighter according to claim 5 wherein said means for selectively producing sparks comprises piezoelectric spark-producing means.

11. The lighter according to claim 1 wherein said actuation and interference means includes means to retain said interference means in said open position.

12. The lighter according to claim 1 wherein said interference means is movable along only a single path from said closed position to said open position.

13. A lighter normally maintained in a latched configuration comprising:

a housing having a longitudinal axis;
fuel supply means for supplying fuel;
ignition means for igniting said fuel;
valve means for controlling the flow of said

fuel;

a valve actuator operatively engaged with said valve means, said valve actuator preventing the flow of said fuel when in a first position, said valve actuator being depressible along said longitudinal axis into a second position to permit the flow of fuel;

a latch positioned at least partially beneath said valve actuator for normally preventing said valve actuator from being depressed into said second position by interfering with the movement thereof along the longitudinal axis of said housing, wherein inward movement of said latch towards the longitudinal axis of said housing enables an interfering portion of said latch to become aligned with a cavity in said housing, and places said lighter

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

in an unlatched configuration, said cavity being sufficient in size to accommodate said interfering portion so as to enable said valve actuator to be
5 depressed; and

camming means operatively engaging said latch for forcing said latch outward away from said longitudinal axis into its first position and the lighter out of its latched configuration when said
10 valve actuator is depressed, moving said latch downward along a direction parallel to the longitudinal axis.

14. The lighter of claim 13 wherein said valve
15 means includes a fuel nozzle which expels fuel when enabled to move upward by said valve actuator, said lighter further including a compensator spring means for urging said fuel nozzle downward.

20 15. The lighter of claim 14 wherein said compensator spring means is a coiled spring.

16. The lighter according to claim 13 wherein said ignition means comprises a spark-producing wheel
25 and a flint urged against said wheel and wherein sparks are produced by rotation of said wheel.

17. The lighter according to claim 13 wherein said ignition means comprises electric spark-producing
30 means.

18. The lighter according to claim 13 wherein said ignition means comprises piezoelectric spark-producing means.
35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

19. The lighter according to claim 13 wherein
said latch is constrained to move along only a single
path when said lighter is configured from said latched
5 configuration to said unlatched configuration.

20. The lighter according to claim 13 wherein
said lighter is maintained in each of said latched and
unlatched configurations by the interaction between
10 said latch and said valve actuator.

21. The lighter according to claim 13 wherein
said latch is slideably attached to said valve
actuator between said latched and unlatched
15 configurations.

22. The lighter according to claim 21 wherein
said latch is under no loading in each of said latched
and said unlatched configuration.

23. The lighter according to claim 13 wherein
said latch comprises a portion normally positioned
between at least a portion of said valve actuator and
at least a portion of said housing.

24. The lighter according to claim 13 wherein
said unlatched configuration is maintained until said
valve actuator is depressed and released.

25. A lighter comprising:
a housing having a fuel compartment;
fuel release means for releasing fuel from
said fuel compartment;
means for igniting said released fuel;
35 a thumb-depressible actuator operatively
engaged with said release means such that when

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

depressed along a longitudinal axis of said housing fuel is released, said actuator having protrusions on either sides thereof;

5 a U-shaped latch disposed between said actuator and a portion of said housing for preventing said actuator from being depressed by abutting at least a portion of said housing, said latch having indentations on either sides thereof, said latch being
10 selectively movable inward towards the longitudinal axis of said housing such that said protrusions engage and mate with said indentations thereby holding said latch inward,

 wherein said movement inward produces a void
15 between said latch and said housing, said void sufficient in size to allow said actuator to be depressed so as to allow fuel to be released from said fuel compartment; and

 caming means operatively engaged with said
20 latch when said latch is in its inward position and when said actuator is depressed for disengaging said protrusions from said indentations thereby allowing said latch to move outward away from the longitudinal axis of said housing.

25

26. The lighter according to claim 25 wherein said latch is slideably attached to said actuator.

27. The lighter according to claim 25 wherein
30 said means for igniting includes flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

35 28. The lighter of claim 25 wherein said means for igniting includes electric spark-producing means.

This Sheet Has Been Replaced



29. The lighter of claim 25 wherein said means for igniting includes piezoelectric spark-producing means.

5

30. The lighter of claim 25 wherein said fuel release means includes a fuel nozzle which expels fuel when enabled to move upward by said actuator, said lighter further including a compensator spring means for urging said fuel nozzle downward.

10

31. The lighter of claim 30 wherein said compensator spring means is a coiled spring.

15

20



25

30

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 1


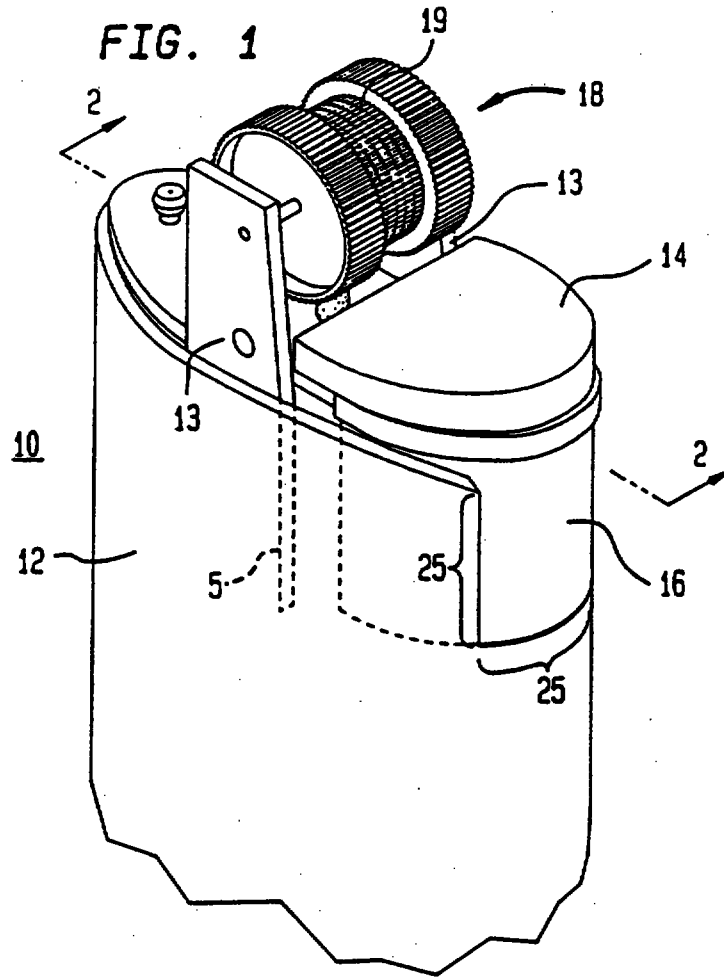





FIG. 2



This Sheet Has Been Replaced

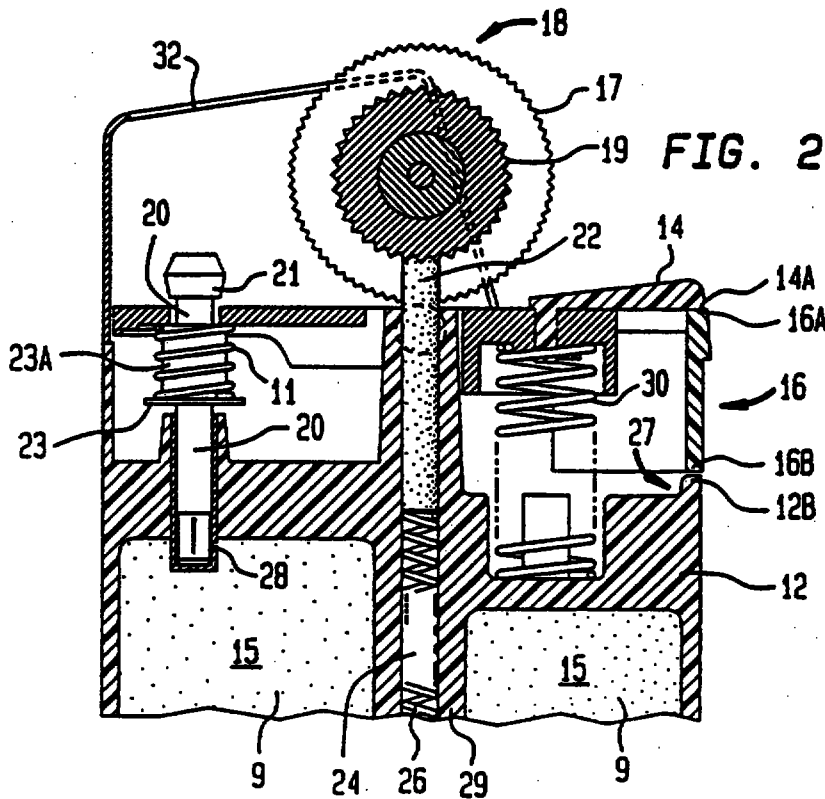

2 / 6

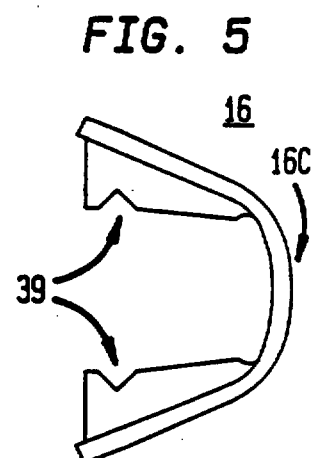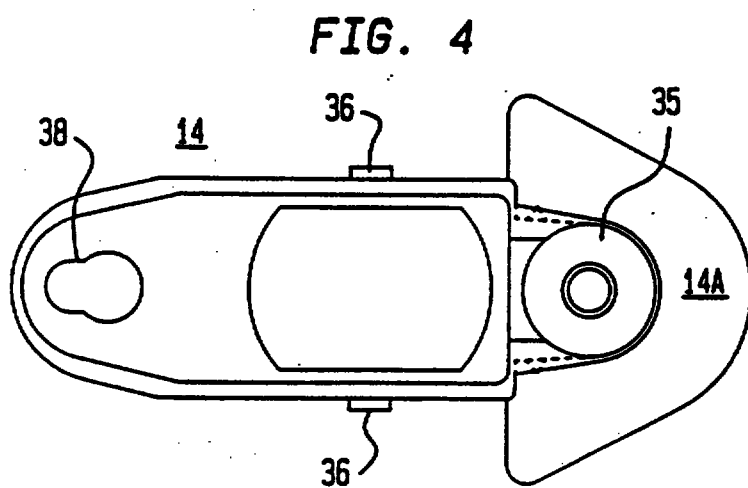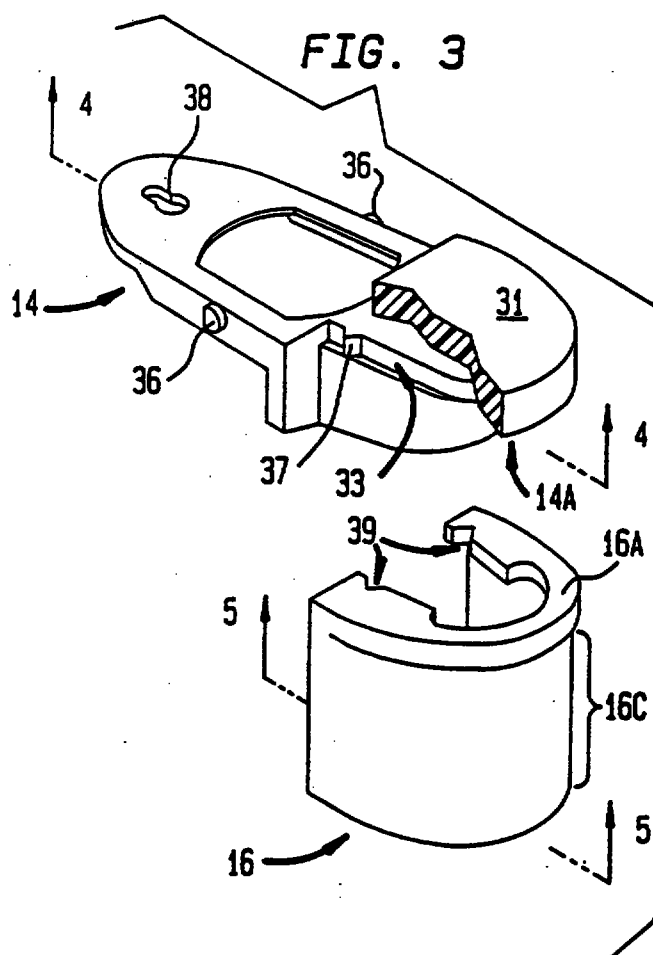THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 6

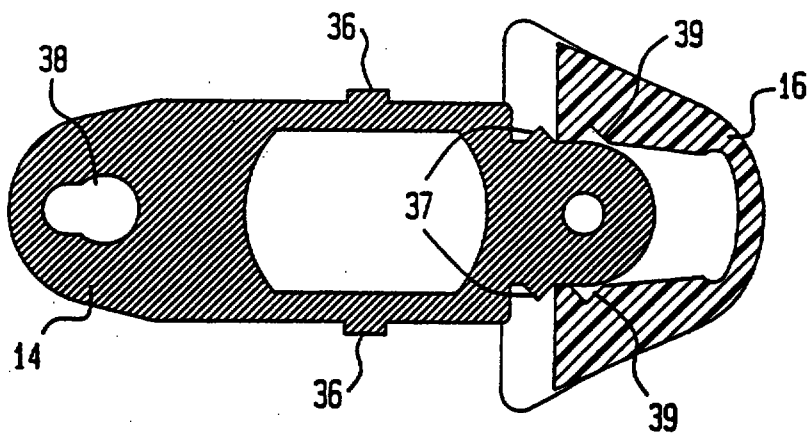


FIG. 7


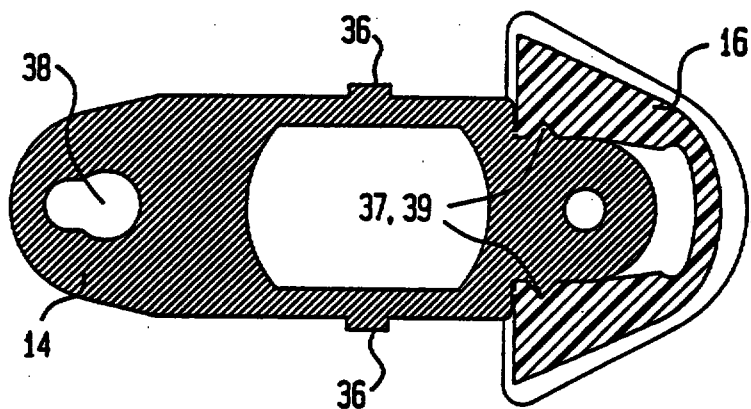


FIG. 8




This Sheet Has Been Replaced

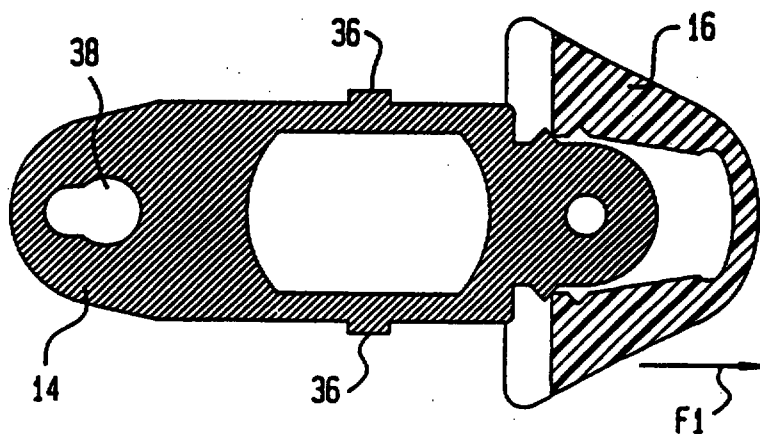

THIS SHEET HAS BEEN
REPLACED


FIG. 9

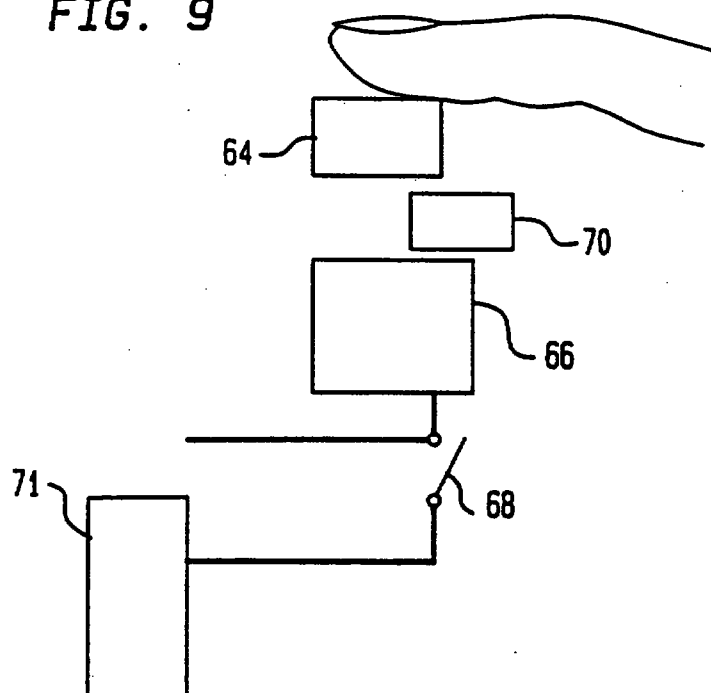

This Sheet Has Been Replaced



FIG. 10

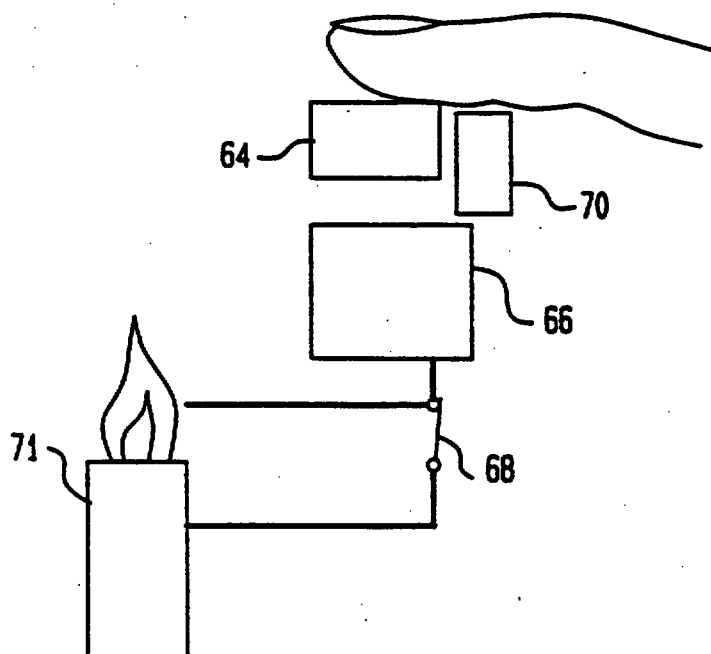

THIS SHEET HAS BEEN
REPLACED

FIG. 11


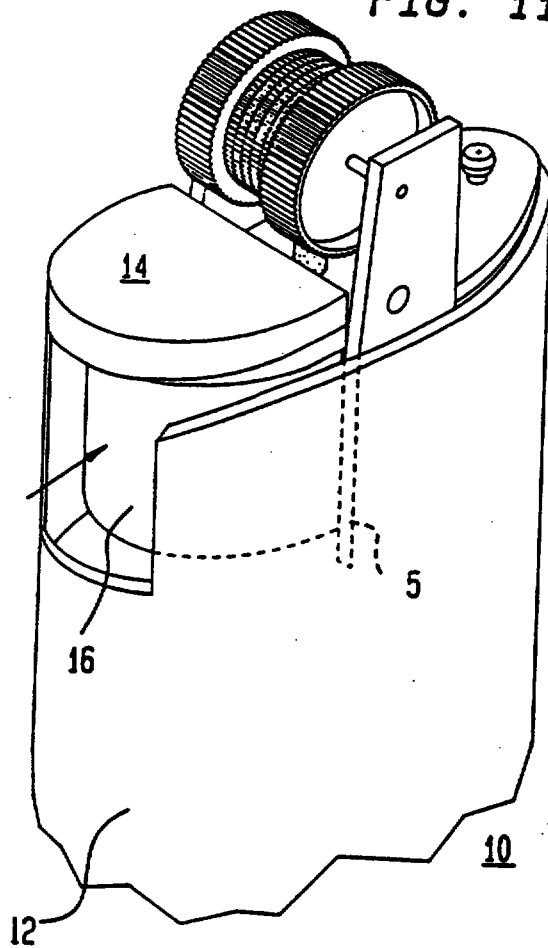



FIG. 12

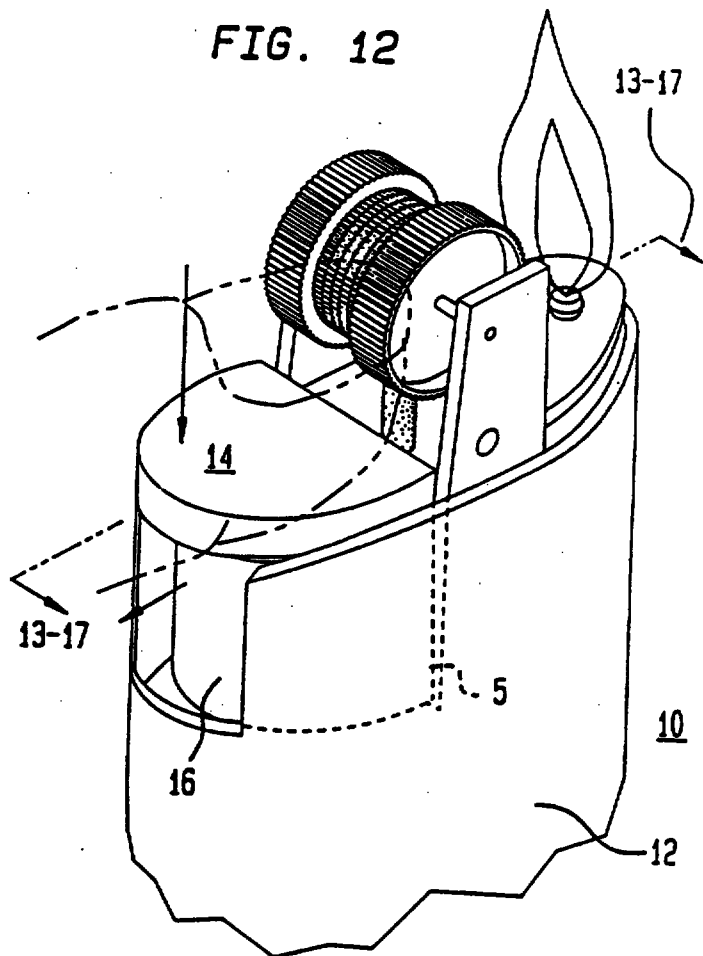

This Sheet Has Been Replaced



FIG. 16

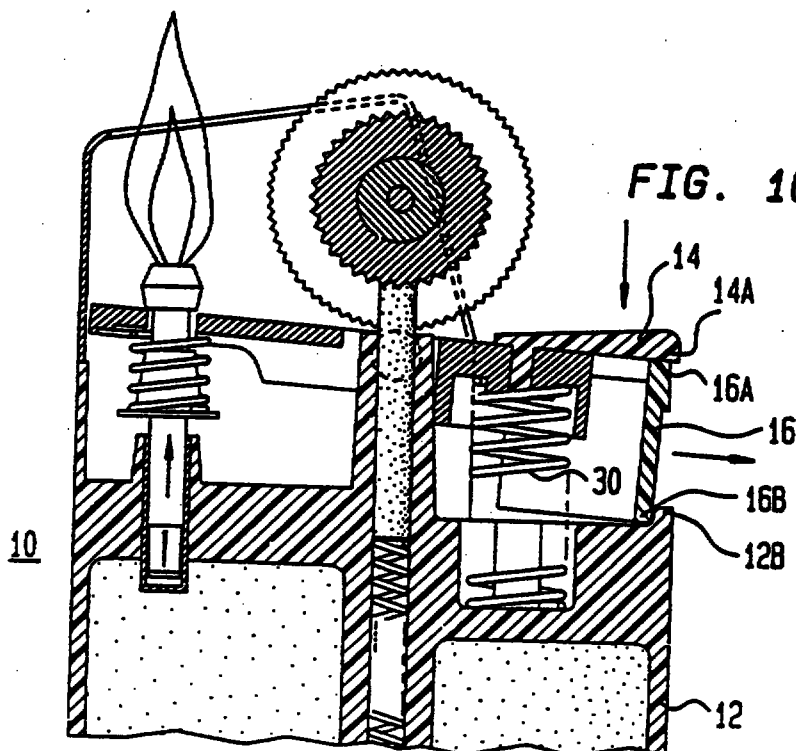

THIS SHEET HAS BEEN
REPLACED

FIG. 13

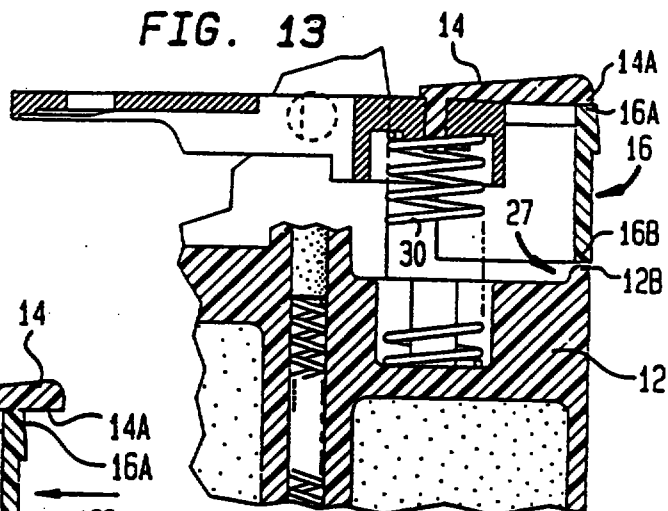


FIG. 14

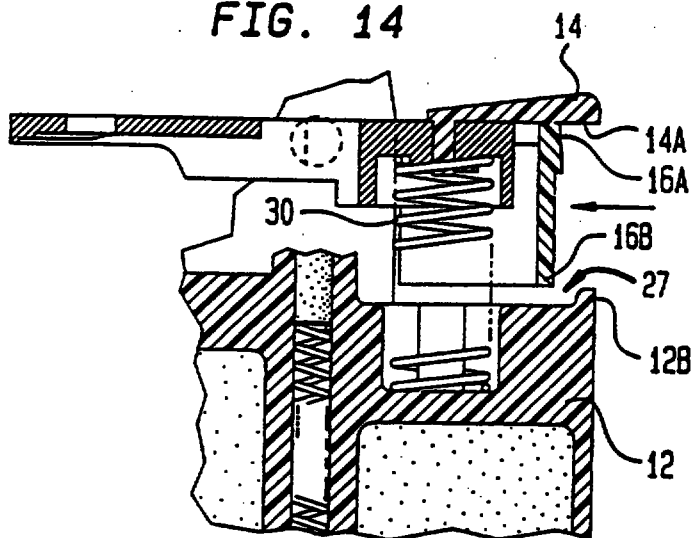


FIG. 15


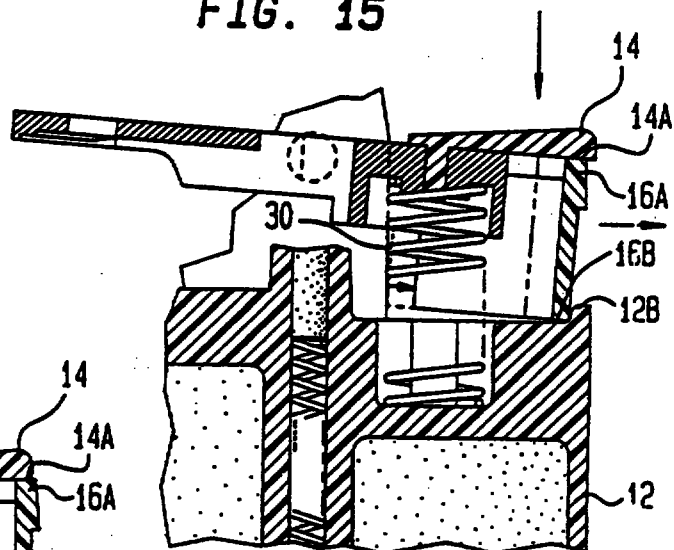


FIG. 17



This Sheet Has Been Replaced

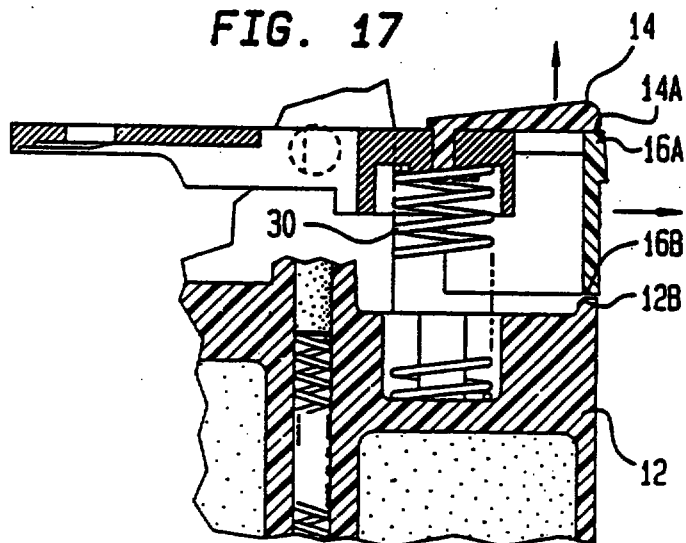

9606667-5

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

SELECTIVELY ACTUATABLE LIGHTERBACKGROUND OF THE INVENTIONCross-Reference to Related Applications

5 This is a continuation-in-part of U.S. Patent
Application Serial No. 07/723,989 filed on July 1,
1991, entitled "Selectively Actuatable Lighter", which
is a continuation-in-part of U.S. Patent Application
Serial No. 07/609,668 filed on November 6, 1990,
10 entitled "Selectively Actuatable Lighter", abandoned,
which is a continuation of Serial No. 07/239,734 filed
on September 2, 1988, entitled "Selectively Actuatable
Lighter", which issued on March 26, 1991 as U.S.
Patent No. 5,002,482. This is also a continuation-in-
15 part of U.S. Patent Application Serial No. 07/912,421,
filed on July 10, 1992, entitled "Selectively
Actuatable Lighter", which is a continuation of U.S.
Patent Application Serial No. 07/609,668. Each of
these four patent applications is incorporated herein
20 by reference.

This application is also related to U.S. Patent
No. 5,125,829, entitled "Bidirectional Selectively
Actuatable Lighter" which issued on June 30, 1992, and
25 U.S. Patent No. 5,092,764, entitled "Selectively
Actuatable Lighter With Locking Value Cap" which
issued on March 3, 1992. This application is also
related to U.S. Patent Applications Serial Nos.
_____, _____ and _____, each entitled
30 "Selectively Actuatable Lighter" and each filed
concurrently herewith. Each of these two patents and
three patent applications is incorporated herein by
reference.

35

This Sheet Has Been Replaced



19 NOV 1996

- 2 -

Technical Field

5 This invention relates generally to lighters
which consume fuel such as, for example, butane which
is stored in a reservoir in a liquid state, then
passed through a valve means and finally ignited by a
spark or other similar means. More particularly, the
invention relates to a butane cigarette lighter having
10 a feature which interferes with depression of a valve
actuator and in turn hinders expulsion of fuel from a
valve nozzle (i.e., fuel nozzle) and/or generation of
sparks thereby rendering operation of the lighter by
young children even more difficult. Advantageously,
15 this feature of the lighter may be deactivated by
moving a latch to a non-interfering position, thus
facilitating flame production.

Description of the Art

20

Numerous lighters are known, some of them
incorporating features which are designed to render
operation of the lighter more difficult by certain
users. Some of such features relate to mechanisms
25 which are designed to prevent ignition of a fuel
source unless the lighter is properly oriented,
mechanisms which are designed to automatically turn
off a fuel source supply valve, and tamper protection
arrangements.

30

More recently, attention has been directed toward
preventing ready actuation of such lighters by persons
normally not able to appreciate the potential danger
of the flame. Individuals normally contemplated in
35 these efforts are young children, in the age category
younger than five years.

19 NOV 1996

- 3 -

U.S. Patent No. 4,784,601 to Nitta relates to a gas lighter having an L-shaped slideable stopper which is positionable to prevent descent of a gas lever which controls fuel flow. The lighter is rendered operable by moving the stopper outward so that its vertical leg is displaced from the top surface of the lighter housing. The L-shaped slideable stopper must be manually moved into its locking position each time it is desired to lock the lighter.

U.S. Patent No. 4,784,602 to Nitta relates to a gas lighter having an L-shaped slideable stopper which is positionable to prevent descent of a gas lever which controls fuel flow. The lighter is rendered operable by moving the stopper inward so that its vertical pin engages a hole in the surface of the lighter housing. The L-shaped slideable stopper must be manually moved into its locking position each time it is desired to lock the lighter.

U.S. Patent No. 4,786,248 to Nitta relates to a piezoelectric lighter equipped with a thumb-latch slideably fitted within a lighter casing. The thumb latch is manually slideable into and out of a position which interferes with depression of a thumb-pusher. The lighter is rendered operable by manually sliding the thumb-latch to an unlocked position. After operation of the lighter a user must manually slide the thumb-latch to its locked position in order to lock the lighter.

U.S. Patent No. 4,904,180 to Nitta relates to a piezoelectric lighter equipped with a lock means which automatically returns to a locked position after use of the lighter. The lock means includes a stopper and

19 NOV 1996

- 4 -

a leaf-spring which keeps the stopper urged toward the windshield. The lighter may only be operated after the stopper is drawn backwards, away from the
5 windshield. The lighter cannot maintain the stopper in the drawn back position without the application of constant force by a user. That is, no means are provided to maintain the lighter in an unlocked configuration.

10

U.S. Patent No. 1,895,032 to Fisher relates to a lighter in which a manual control means is movable out of engagement with a shoulder portion of the lighter so as to enable the manual control means to be
15 depressed thereby causing the lighter to operate. The control means returns to its position in engagement with the shoulder portion after use of the lighter. The lighter cannot maintain the control means in its out of engagement position without the application of
20 constant force by a user.

U.S. Patent No. 4,830,603 to Cirami relates to a cigarette lighter in which a locking mechanism is provided partially under a valve-actuating push-button
25 and extends into a compartment appended to but distinct from a fuel compartment. The locking mechanism relocks itself after each depression of the push-button. In particular, one end of a stiffly flexible spring steel wire is held firmly in place in
30 the compartment. Another end of the spring steel wire forms a probe extending into a channel provided in the underside of the push-button. The spring steel wire, in a locked configuration, prevents depression of the push-button by engaging a low ceiling on the underside
35 of the push-button. A portion of the spring steel wire in the form of a loop extending outward from the

19 NOV 1996

- 5 -

lighter is accessible by an operator and may be suitably moved by the operator thereby causing the probe to move within the channel in the underside of the push-button.

U.S. Patent No. 4,832,596 to Morris, Sr. relates to a cigarette lighter having a stop member slideably mounted thereon for releasably engaging a gas valve actuating lever. In particular, a spring biased stop member is slideably mounted on a top portion of a conventional disposable cigarette lighter. The stop member is biased so as to place one of its ends under the lighter's gas valve actuating lever so as to prevent movement of the lever in a direction which may open the gas valve. The lever may be actuated once the stop member is pushed in a direction opposite to the biasing force of the spring so as to slide the end which is under the lighter's gas valve outward.

U.S. Patent No. 4,717,335 to Loveless relates to a cigarette lighter in which rotation of a spark-producing wheel is limited. In particular, the spark-producing wheel may be rotated in one direction to deliver a spark toward a nozzle through which gaseous fuel is passed, thereby causing the fuel to ignite and operating the lighter. Rotation of the spark-producing wheel in the other direction may deliver a spark away from the nozzle. The spark-producing wheel has a pin-shaped structure attached thereto which serves to limit the rotation of the wheel to under 360° by contacting the housing structure. Thus, whether a spark indeed is produced depends upon the direction of attempted rotation and the position of the pin-shaped structure relative to the housing structure. In theory, once the lighter is operated

19 NOV 1996

and the fuel ignited, and the pin-shaped structure has traversed its entire path of travel, subsequent operation of the lighter is impeded since the pin-shaped structure comes into contact with the housing, preventing a spark from occurring in the vicinity of the fuel nozzle.

U.S. Patent Nos. 4,028,043 and 4,049,370 each to Neyret relate to presale tamper protection mechanisms which partially surround a spark-producing wheel, fuel nozzle or depressible valve actuation member of a lighter. These presale tamper protection mechanisms are attached to the lighter housing by frangible webs and are removed by a purchaser after sale of the lighter to expose the spark-producing wheel, fuel nozzle and/or depressible valve actuation member. However, such a presale tamper protection mechanism is of limited value once initially removed by a purchaser.

U.S. Patent Nos. 3,547,566 to Tamarin and 3,899,286 to Lockwood et al. relate to lighters having orientation sensing mechanisms which hinder or prevent actuation of the lighter in an inverted position. Unfortunately, such mechanisms may not provide a sufficient degree of child resistancy to young children who tamper with the lighter since they merely hinder operation in prescribed orientations.

U.S. Patent No. 4,921,420 to Johnston relates to a disposable lighter having a release means that is physically separated from the conventional lighting means. The lighter may only be operated once the release means is released. The distance separating the release means and the conventional lighting means

19 NOV 1996

- 7 -

is intended to be sufficiently large so as to make it difficult for small children to operate the lighter.

5 U.S. Patent No. 5,074,781 to Fujita relates to a cigarette lighter having a lock member which must be rotated in a specified direction towards one side of the lighter so as to allow a depressible valve actuator to be depressed and the lighter to operate.

10

U.S. Patent No. 5,076,783 to Fremund relates to a lighter having a depressible valve actuator which is coupled to a vertical rod which extends to an opposite end of the lighter where it contacts a locking member.

15 The locking member must first be displaced so as to enable depression of the valve actuator.

U.S. Patent No. 5,090,893 to Floriot relates to a lighter having a slide member which, when in a first position, prevents depression of a valve actuator. The slide member is slideably movable to a second position in which the valve actuator may be depressed. The slide member is retained in each of the first and second positions by its interaction with and configuration relative to the lighter housing. The slide member is initially moved from its second position toward its first position by forces applied directly from the valve actuator. The slide member is not capable of vertical movement. Additionally, the slide member protrudes from the lighter when in its first position.

Many mechanisms which are designed to render operation of the lighter more difficult by certain users are unnecessarily complicated, present difficulty in their manufacture and/or exhibit a high

19 NOV 1996

- 8 -

likelihood of mechanical failure during use. Another disadvantage found in some devices is that the particular construction employed limits the shape and size of the lighter housing due to the requirement that the housing be large enough to accommodate such mechanism(s). Further disadvantages relate to the relative ease with which some mechanisms may be defeated and to the reliability of the mechanisms.

For example, some mechanisms may be overridden or removed with relative ease. Additionally, some devices are not equally adaptable for use by both right-handed and left-handed users, and some include inconveniently shaped or positioned levers or knobs which need to be actuated by the user in order to operate the lighter. Similarly, some devices which may indeed be equally adaptable to both right-handed and left-handed users employ a mechanism which is actuated differently and/or moved to different positions depending on whether the user is right-handed or left-handed. Furthermore, some of these devices require repositioning of the lighter in an operator's hand after actuation of the mechanism and before the lighter is operated to produce a flame.

For example, some lighters include an actuatable mechanism located sufficiently far from a valve actuation means, or on another side of the lighter than the valve actuation means, so as to result in awkward operation of the lighter. Additionally, some devices require an excessive number of components while some devices include components which are configured such as to require an excessive force to actuate a depressible valve actuator. For example, some devices include a latch which requires an excessive amount of force on the valve actuator in order to automatically return the latch to its

19 NOV 1996

- 9 -

normally latched position after the lighter is operated. Some devices include a latch having an overly obvious protrusion which is too easily moved into a noninterfering position. Additionally, a portion of such a latch or protrusion is too easily broken off or otherwise removed by a user, thus rendering the lighter either permanently locked and inoperable, or rendering the latch effectively in a permanent unlocked position and thus permanently overridden.

Although it is known to prevent or hinder presale actuation of a depressible valve actuation member or actuation of a lighter in a specified orientation, none of the above-described lighters provides an efficiently manufacturable, relatively small, reliable mechanism for preventing actuation of the depressible valve actuation member and equally adaptable for use by both right-handed and left-handed users and which is similarly actuated by both right-handed and left-handed users.

As will be appreciated, development of a "child-proof" lighter per se is probably not viable. At best, it can be reasonably sought to create a lighter having features which enhance its child-resistant capability, but how "child-resistant" a lighter will be will depend upon many factors and circumstances. Nevertheless, any lighter having features which enhance its child-resistant capability will have limitations with respect to young children, and no such lighter should provide parents or adults with a false sense of security so that they may become less cautious in their handling of the lighter or permit access to the lighter by young children. Further,

19 NOV 1996

- 10 -

such lighters should not be made so difficult to light as to cause adults to use alternative forms of lighting, i.e., matches, which are generally
5 considered to be potentially more dangerous.

The present invention is directed toward a reliable flame producing lighter which is selectively actuatable in such a manner as to provide a
10 substantial degree of difficulty for young children - younger than five years - to actuate the lighter and produce a flame, while being user friendly and capable of actuation by adults.

15 SUMMARY OF THE INVENTION

This invention relates to a selectively actuatable flame producing lighter having a latch means comprising a latch which is normally in a
20 latched position and which is movable to an unlatched or non-interfering position in which the lighter may be operated. The latch is preferably relatively flush mounted with respect to the lighter housing when in its normally latched position, and does not include
25 portions or protrusions which are easily removed or overly capable of inadvertent movement to a non-interfering position. Additionally, the latch is preferably not under any loading or stress when in its latched as well as unlatched position, and is retained
30 in such positions by its interaction with and configuration relative to the valve actuator. Once in its unlatched position, depression of the valve actuator results in downward movement of part of the actuator as well as the latch. The latch is
35 preferably initially moved from its unlatched position toward its latched position by forces applied directly

19 NOV 1996

- 11 -

from a camming means associated with the lighter housing.

5 Advantageously, the latch may be operated with the same finger a user employs to depress a valve actuation lever, without requiring repositioning of the lighter in a user's hand. The lighter is adapted for use by right-handed as well as left-handed users
10 with the same relative ease. The lighter is preferably similarly actuated by both right-handed and left-handed users, without detracting from the effectiveness of the lighter's child-resistant capability. That is, the latch is preferably movable
15 along only a single path from its latched position to its unlatched position, whether operated by right-handed or left-handed users.

One particular embodiment of the invention
20 relates to a flame producing lighter which comprises a housing defining a reservoir for containing a combustible gaseous medium such as fuel under pressure; valve means arranged for selective actuation between a normally closed position which prevents exit
25 of the gaseous medium from the reservoir, and an open position which permits exit of gaseous medium from the reservoir through the valve means; means for selectively producing sparks at a location proximate the gaseous medium exit opening of the valve means
30 thereby selectively causing ignition of the gaseous medium; means normally positioned for preventing actuation of the valve means to the open position, the valve actuation prevention means being incapable of vertical movement when in its normal position and
35 being movable out of its normal position inward into a second position only by application of an external

19 NOV 1996

- 12 -

force, where it is capable of vertical movement; means
for selectively moving the valve actuation prevention
means to the second position whereby actuation of the
5 valve means to the open position is permitted thereby
selectively permitting exit of the combustible gaseous
medium from the valve means and ignition of the
gaseous medium by sparks produced by the spark
producing means, wherein the valve actuation
10 prevention means automatically returns to the normal
position after actuation of the lighter. The lighter
preferably includes means to retain the valve
actuation prevention means in the second position,
thus retaining the lighter in an unlatched
15 configuration. Such retention means may include
portions of the housing and/or portions of the valve
actuation prevention means and/or portions of the
valve actuator. Additionally, the valve actuation
prevention means of the lighter is preferably
20 constrained to move along only a single path from its
normal, or latched, position to the second, or
unlatched, position. The valve actuation prevention
means is preferably under no loading when in each of
its latched as well as unlatched positions.

25 In this embodiment, the valve means is preferably
actuated to the open position by actuator means and
the means for preventing actuation of the valve means
to the open position comprises interference means for
30 preventing movement of the actuator means, the valve
actuation interference means being selectively movable
to a position out of interference with the valve
actuator means. The valve actuation interference
means is normally retained in a valve actuation
35 interference position, the movement thereof to the
position out of interference with the valve actuator

19 NOV 1996

- 13 -

means is resiliently provided. Advantageously, the resilient movement of the valve actuation interference means facilitates the return of the valve actuation interference means to its interfering position once the valve actuator is released, thus preventing the valve nozzle from opening. A camming means such as ramps formed within the housing may also be employed to facilitate the return of the valve actuation interference means to its interfering position. Illustratively, the valve actuation means may be retained in its latched and unlatched positions by its interaction with the actuator means. Additionally, the valve actuation interference means is preferably attached to the valve actuator such as by way of a slideable arrangement.

The valve actuation interference means may take on a variety of forms such as a latch means, a latch or an interference member.

The spark producing means of the lighter preferably includes flint material and a rotatable spark-producing wheel which has a toothed surface positioned and arranged to selectively frictionally contact the flint material. Alternatively, the means for selectively producing sparks may be an electric spark-producing means, such as a piezoelectric spark-producing means.

Another embodiment of the invention relates to a flame producing lighter resistant to unauthorized use and normally maintained in a latched configuration comprising a housing; fuel supply means for supplying fuel to be ignited; ignition means for igniting the fuel; valve means for controlling the flow of the

19 NOV 1996

- 14 -

fuel; a valve actuator which normally prevents the flow of the fuel when in a first position and is depressible to a second position which permits
5 actuation of the fuel supply means thereby permitting fuel to flow out from the fuel supply means; and a latch positioned so as to normally prevent depression of the depressible valve actuator and normally maintain the lighter in the latched configuration.
10 For example, the latch may include at least a portion normally positioned between at least a portion of the valve actuator and at least a portion of the housing.

In this embodiment, inward movement of the latch
15 enables a tip portion of the latch to become aligned with a cavity in or near the housing, the cavity being sufficient in size to accommodate the tip portion so as to eventually enable the valve actuator and the latch to be depressed.

20 Such inward movement of the latch places the lighter in an unlatched configuration in which the valve actuator is capable of being depressed, thereby permitting fuel to flow. Preferably, the unlatched
25 configuration is maintained until the valve actuator is depressed.

Another embodiment of the lighter employs means for preventing movement of the actuator means, such
30 prevention means having a finger actuatable portion and an interfering portion, the interfering portion being normally in alignment with an interfering portion of the housing thereby preventing movement of the actuator means, the finger actuatable portion
35 being selectively movable so as to move the interfering portions out of alignment with each other,

19 NOV 1996

-15-

such movement being resiliently provided so as to facilitate the return of the interfering portions into alignment with each other when the valve actuator is released, thus preventing the valve nozzle from opening.

Another embodiment of the invention relates to a fuel cut-off mechanism for use in combination with a lighter which comprises means for normally preventing actuation of a fuel supply; means for selectively permitting actuation of the fuel supply including a depressible valve actuator which upon depression actuates the fuel supply thereby permitting fuel to flow out from the fuel supply; and a latch which normally interferes with depression of the depressible valve actuator, the latch being arranged such that inward movement of the latch provides a void sufficient in size to enable depression of the valve actuator and downward movement of the latch wherein fuel is permitted to flow.

The present invention also relates to an improved lighter of the type having valve means for selectively releasing fuel, means for igniting the fuel, valve actuator means for actuating the valve means so as to release fuel, the valve means including a fuel nozzle which expels fuel when the fuel nozzle is lifted upward by the valve actuator means, wherein the improvement comprises a compensator spring which maintains the fuel nozzle in its downward position when the valve actuator is initially actuated. The compensator spring is preferably positioned between the valve actuator means and a portion of the fuel nozzle so as to urge the fuel nozzle downward. The compensator spring is preferably a metallic coiled

19 NOV 1996

-16-

spring. The fuel nozzle is preferably normally biased downward by the valve actuator means.

5 In another embodiment, such lighter includes interference means positioned so as to normally interfere with actuation of the valve actuator means, and the compensator spring means compensates for movement of the valve actuator means when the
10 interference means is normally positioned so as to interfere with the actuation of the valve actuator means.

Operation of the lighter requires a certain
15 amount of dexterity and the application of concentrated forces as well as the application of a plurality of forces in multiple directions and in a specified sequence. Additionally, operation of the lighter requires a certain level of cognitive ability.

20 Furthermore, the lighter of the present invention is a passive latching lighter. Advantageously, the lighter automatically returns to its latched configuration once the depressed valve actuator is
25 released. Thus, the lighter is maintained in an at-rest or default configuration which is latched thereby preventing the flow of fuel and the production of a flame.

30 Advantageously, the lighter is adapted for use by right-handed as well as left-handed users with the same relative ease, and is similarly actuated by both right-handed and left-handed users. Furthermore, the user may operate the latch mechanism with the same
35 finger as used to depress the valve actuator without

19 NOV 1996

-17-

requiring the user to reposition the lighter in the user's hand.

5

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects, features, and advantages of the present invention will become more readily apparent from the following detailed description of the invention in which:

10

FIG. 1 is a partial perspective view of a preferred embodiment of a selectively actuatable lighter of the present invention in a latched configuration;

15

FIG. 2 is a partial cross-sectional view of the lighter of Fig. 1 depicting the latch in a latched configuration;

20

FIG. 3 is an exploded view of the valve actuator and latch depicted in Figs. 1 and 2;

25

FIG. 4 is a bottom view of the valve actuator depicted in Fig. 3;

FIG. 5 is a bottom view of the latch depicted in Fig. 3;

30

FIG. 6 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in their latched configuration thereby permitting depression and actuation of the valve actuator;

35

FIG. 7 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in their

19 NOV 1996

-18-

unlatched configuration thereby permitting depression and actuation of the valve actuator;

5 FIG. 8 is a cross-sectional view of the valve actuator and latch depicted in Fig. 3 when in a configuration which is intermediate of the latched and unlatched configurations;

10 FIG. 9 is a schematic diagram depicting a piezoelectric lighter apparatus in which the present invention may be employed and having an optional switch depicted in the open position and a latch means depicted in the latched position to prevent the
15 production of sparks and the flow of fuel;

FIG. 10 is a schematic diagram depicting the piezoelectric lighter of Fig. 9 with the switch depicted in the closed position and the latch means
20 depicted in the unlatched position and depicting a flame;

FIG. 11 is a perspective view of a preferred embodiment of the lighter in an unlatched
25 configuration in which the latch is at its unlatched position thereby permitting depression of the valve actuator so as to permit a valve to open and gas to be released through a fuel nozzle;

30 FIG. 12 is a perspective view of the lighter of Fig. 11 with the valve actuator in a depressed position and the valve open and depicting a flame;

FIG. 13 is a partial cross-sectional view of the
35 preferred embodiment of the lighter in its latched

19 NOV 1978

-19-

configuration thereby preventing depression and actuation of the valve actuator;

5 FIG. 14 is a partial cross-sectional view of the lighter of Fig. 13 in its unlatched configuration and the valve actuator not depressed and the lighter ready for actuation;

10 FIG. 15 is a partial cross-sectional view of the lighter of Fig. 14 in its partially unlatched configuration and the valve actuator fully depressed so as to permit the flow of fuel;

15 FIG. 16 is a partial cross-sectional view of the lighter of Fig. 15 in greater detail; and

20 FIG. 17 is a partial cross-sectional view of the lighter of Fig. 15 after the valve actuator has been fully depressed and released.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring initially to Fig. 1, there is depicted,
25 in a default or at-rest configuration, the lighter 10 of the present invention comprising a main body portion 12, a depressible valve actuator 14, latch 16, and a spark-producing wheel assembly 18 which includes a toothed surface 19. Advantageously, the default
30 configuration is also a latched configuration in which valve actuator 14 cannot be depressed due to the interference presented by latch 16. Depression of valve actuator 14 permits fuel to flow through a fuel nozzle and to be ignited by sparks produced by toothed
35 surface 19 of spark-producing wheel assembly 18 frictionally engaging a flint. Advantageously, unless

19 NOV 1996

-20-

latch 16 is positioned away from its depicted at-rest or default position and into a non-interfering position, any attempted depression of valve actuator 14 will not result in the flow of fuel and the lighter will be inoperable. The position of latch 16 as shown in Figs. 1 and 2 may best be characterized as a "default position" under normal conditions.

As will be appreciated, a variety of configurations, shapes and relative positioning exists for the valve actuator and the latch means in which the latch is movable, with respect to the valve actuator, between an interfering or latched position and a non-interfering or unlatched position. The invention will be described in terms of a preferred embodiment in which an illustrative latch normally interferes with depression of the valve actuator when in a latched position, and is movable to an unlatched position in which the valve actuator may be depressed. Preferably, the latch is moved from its latched position to its unlatched position along a single path, which is equally suitable for right-handed as well as left-handed users. Such movement is illustratively in an inward direction. As will be appreciated, for ease of understanding, such inward motion of the latch is deemed to include any inward motion or component thereof of any portion of the latch. The latch is preferably maintained in its unlatched position after being moved there by a user, and preferably automatically returns to its latched position once a user depresses and releases the valve actuator.

A user typically holds the main body portion of a conventional lighter in his hand, rotates with his

19 NOV 1996

-21-

thumb the spark-producing wheel in a direction generally toward the depressible surface of the valve actuator to produce a spark, and depresses the valve actuator to allow fuel to pass through the fuel, or
5 valve, nozzle. The spark produced by the wheel ignites the fuel. This is a relatively conventional structure for most lighters, including disposable lighters.

10

Referring now to Fig. 2, there is depicted a cross-section of the lighter of Fig. 1 in a latched configuration. More particularly, valve actuator 14 is mounted between side wall portions 13 (see Fig. 1)
15 which illustratively comprise extensions of the side walls of body portion 12. Illustratively, valve actuator 14 is pivotally mounted to sidewall portions 13. Valve actuator 14 is attached to hollow fuel nozzle 20 slideably supported within a valve housing
20 28. Hollow fuel nozzle 20 is held within an opening such as a bore in valve actuator 14 by flange 21, compensator spring means 11 and flange extension 23A. Flange 21 and flange extension 23A each has a sufficient size and is configured so as to prevent
25 slippage of nozzle 20 through the bore in valve actuator 14. Additionally, spring means 11 is maintained as shown in Fig. 2 by flange 23 which is attached to fuel nozzle 20 as is flange 21. A compressed spring means 30 resides beneath valve
30 actuator 14 and causes fuel nozzle 20 to be urged downward into valve housing 28 and body portion 12. In particular, compressed spring 30 causes valve actuator 14 to apply force to spring means 11 which supplies force to flange 23, thereby urging nozzle 20
35 downward into valve housing 28 and body portion 12 and preventing the flow of fuel through nozzle 20.

19 NOV 1996

-22-

Additionally, downward movement of valve actuator 14 in the vicinity of nozzle 20 is limited by contact between the underside of valve actuator 14 and flange extension 23A. In such an embodiment, valve actuator 14 is employed to lift nozzle 20 by the application of force to flange 21 in order to expel fuel. A valve assembly (not fully shown) is located near the recessed end of nozzle 20 and permits fuel to flow through nozzle 20 only when valve actuator 14 is depressed and nozzle 20 lifted.

As will be appreciated, actuation of valve actuator 14 generally results in upward movement of the valve actuator in the vicinity of nozzle 20. However, in the embodiment depicted in Fig. 2, nozzle 20 remains downward during the initial upward movement of valve actuator 14 in the vicinity of nozzle 20 due to the action of compensator spring 11. More specifically, nozzle 20 only moves upward once the valve actuator in the vicinity of nozzle 20 moves upward a sufficient amount such that a top surface of valve actuator 14 in the vicinity of nozzle 20 contacts flange 21. Advantageously, depression of the valve actuator while the lighter is in a latched configuration, while possibly causing the valve actuator in the vicinity of nozzle 20 to move upward due to, for example, a gap between valve actuator interfering portion 16B and housing interfering portion 12B, will not result in any upward movement of the fuel nozzle. Accordingly, fuel will not be released in the event the valve actuator is depressed while the lighter is in a latched configuration. As will be appreciated, such use of a compensator spring is desirable in lighters which incorporate a gap allowing some depression of a latched valve actuator

19 NOV 1996

-23-

which would otherwise release fuel due to such depression.

5 Lighter 10 further comprises a sparking flint 22
mounted within a bore 24 defined by flint and spring
housing 29 in main body 12. Flint 22 is urged toward
toothed surface 19 of wheel assembly 18 by spring 26.
Spark-producing wheel assembly 18, which includes
10 toothed surface 19 which is preferably suitably
hardened and against which flint 22 is urged, is
mounted for rotation between side wall extension
portions 13 in a conventional manner. Toothed surface
19 includes suitable indentations which define teeth
15 such that when spark-producing wheel assembly 18 is
rotated toothed surface 19 cuts against flint 22
causing the generation of ignition sparks.
Additionally, spark-producing wheel assembly 18
includes suitable indentations 17 which facilitate
20 rotation of spark-producing wheel assembly 18 by an
operator's finger.

Main body 12 defines an internal chamber 15 which
is filled with a fuel 9 such as butane fuel capable of
25 vaporizing in a conventional manner to produce a
gaseous medium which passes through fuel nozzle 20
under the control of a valve. Main body 12 is
constructed from any suitable structural material or
materials, and is preferably constructed from a
30 plastic material. A shield 32, preferably constructed
from metal, is provided and functions as a wind guard
around the flame thereby assisting in the ignition of
the fuel.

35 As will be appreciated, main body 12 generally
encompasses any part, portion, structure or

19 NOV 1996

-24-

substructure of the lighter except for the valve actuator and spring, spark producing wheel assembly, flint and spring, valve assembly, and latch means.

- 5 Accordingly, what will be described as housing interfering portion 12B is deemed to include any such part, portion, etc.

As depicted in Fig. 1 and 2, a notched opening 25
10 is provided in body portion 12 to accommodate valve actuator 14 and latch 16 and, in particular, vertical movement of valve actuator 14 and inward as well as vertical movement of latch 16. As will be appreciated, Figs. 1 and 2 depict the lighter in a
15 latched configuration, i.e., a default configuration. In this latched configuration, latch 16 is positioned between valve actuator 14 and housing 12 and prevents depression of valve actuator 14, thereby preventing actuation of the valve means and thus the release of
20 fuel.

Referring again to Fig. 2, latch 16 is depicted in its latched configuration in which an interfering portion 16A of latch 16 is positioned and configured
25 so as to interfere with and prevent depression of valve actuator 14. More specifically, an interfering portion 14A of valve actuator 14 contacts interfering portion 16A of latch 16 upon attempted depression of valve actuator 14, thus preventing the release of fuel
30 from fuel nozzle 20. In its latched configuration, latch 16 is prevented from any downward travel by the contact between interfering portion 16B of latch 16 and interfering portion 12B of main body 12. Alternatively, any such downward travel of valve
35 actuator 14 may be prevented by another portion of latch 16 contacting another portion of body 12 or

19 NOV 1996

-25-

another portion of latch 16 contacting another portion of valve actuator 14. As will be discussed in conjunction with Figs. 3-8, latch 16 is movable inward to mate with valve actuator 14 whereupon latch interfering portion 16B is no longer aligned with housing interfering portion 12B thus enabling depression of valve actuator 14 and downward movement of latch 16 at least partially into a notch or cavity 27 suitably shaped for receiving a portion of latch 16 including a tip portion which in turn includes interfering portion 16B. Preferably, cavity 27 is shaped so as to accommodate the tip portion of latch 16, including interfering portion 16B. A user desiring to actuate the lighter must first force the tip portion of latch 16, and thus interfering portion 16B, out of interference with interfering portion 12B of body 12. This is accomplished by a user moving latch 16 inward such that interfering portion 16B is moved into alignment with cavity 27. Specifically, a user applies a component of force to a finger actuatable portion 16C of latch 16 so as to force its tip portion inward and into alignment with cavity 27. As will be discussed in conjunction with Figs. 3-8, once a user moves latch 16 sufficiently inward, the latch will remain inward in its unlatched position until a user depresses and releases the valve actuator.

Referring now to Fig. 3, there is depicted valve actuator 14 and latch 16 in greater detail. Valve actuator 14 comprises a finger depressible surface 31, extensions 36, a nozzle opening such as a bore 38, and valve actuator mating structure 37 (see Figs. 4,6-8). Such mating structure illustratively comprises two protrusions, one located on each of two sides of the

19 NOV 1996

-26-

valve actuator. Extensions 36 are provided to
matingly engage with bores in side wall portions 13 of
body portion 12 to provide pivotal movement of the
5 valve actuator about extensions 36. Bore 38 is
adapted for receiving and grasping a portion of fuel
nozzle 20 between flanges 21 and 23.

Valve actuator 14 is constructed from material
10 having sufficient dimensional stability and rigidity
to continuously over the life of the lighter assure
proper relative positioning between interfering
portion 14A of valve actuator 14 and interfering
portion 16A of latch 16. Actuator 14 is preferably
15 constructed from zinc or glass-filled polyetherimide.
Other illustrative materials from which valve actuator
14 may be constructed are aluminum and other glass
filled polymers such as polyethersulfone or the like,
as well as combinations of these materials.

20

Latch 16 includes latch mating structure 39.
Such mating structure is shaped, configured,
positioned and adapted to releasably mate (i.e. engage
and disengage) with valve actuator mating structure
25 37. Illustratively, such latch mating structure
comprises two indentations, one located on respective
inner surfaces of each of two sides of the latch.

As will be appreciated, mating structures 37 and
30 39 may take on a variety of shapes, positions and
configurations. Their specific structure is not
critical to the present invention. Additionally, each
of structures 37 and 39 can comprise any reasonable
number (including one) of separate structures. For
35 example, valve actuator mating structure 37 may
comprise the embodiment depicted in Figs. 3-8, while

19 NOV 1996

-27-

latch mating structure 39 may comprise four indentations, two located on respective inner surfaces of each of two sides of the latch. In such an embodiment, valve actuator mating structure 37 would engage with two indentations of latch mating structure 39 when in a latched configuration as well as when in an unlatched configuration. As will be described in conjunction with Figs. 6-8, one preferred embodiment of the lighter will have structure 37 mating with structure 39 when the lighter is in its unlatched configuration.

Latch 16 is preferably constructed from relatively rigid and somewhat flexible material which is sufficiently resilient to permit temporary widening of the distance between the two indentations of mating structure 39 so as to engage and disengage from structure 37 of the valve actuator during movement of latch 16 between its latched position and its unlatched position. Latch 16 is preferably constructed from any sufficiently resilient plastic or metal, although a wide variety of other suitable materials having a sufficient degree of rigidity and elastic memory may be employed.

In the latched or closed configuration (Figs. 1 and 2), an upper surface of interfering portion 16A of latch 16 abuts a lower surface of interfering portion 14A of valve actuator 14, and a lower surface of interfering portion 16B of latch 16 abuts an upper surface of interfering portion 12B of body 12, thereby preventing depression of valve actuator 14. Alternatively, a small gap (Figs. 1 and 2) may be provided such as between the lower surface of

19 NOV 1996

-28-

interfering portion 16B of latch 16 and the upper surface of interfering portion 12B of latch 12.

5 Referring again to Fig. 3, latch 16 is slideably attached to valve actuator 14 by way of groove 33 formed in actuator 14. Such slideable attachment, as well as the relative shapes and configurations of groove 33 and the portion of latch 16 which slides
10 within groove 33, enables latch 16 to move outward relative to valve actuator 14, but prevents vertical movement of latch 16 relative to valve actuator 14.

Referring now to Fig. 4, there is depicted a view
15 of the underside of valve actuator 14 of Fig. 3. A portion 35 of valve actuator 14 is adapted to receive spring 30 as depicted in Fig. 2 and may take on a variety of forms such as a protruding member or, alternatively, an indentation or bore partially into
20 valve actuator 14. The fuel nozzle is illustratively maintained in bore 38 by fuel nozzle flanges 21 and 23 and spring means 11 (Fig. 2) which have a diameter greater than that of a corresponding portion of bore 38.

25 Fig. 5 depicts the underside of latch 16 of Fig. 3. The size, shape, and configuration of latch 16 facilitates retention of the lighter in an unlatched configuration as well as stabilization of latch 16 within the lighter, and assures proper positioning and
30 retention of latch 16 in notched opening 25 especially when the latch is moved. Finger actuatable portion 16C of latch 16 is employed by a user to move the latch and, in particular, to move its interfering
35 portion 16B inward so as to become aligned with cavity 27 of housing 12.

19 NOV 1996

-29-

Figs. 6, 7 and 8 are each cross-sectional views of the valve actuator and latch of Fig. 3 when in their latched (Fig. 6), unlatched (Fig. 7) and
5 intermediate (Fig. 8) configurations. More specifically, Fig. 6 depicts latch 16 in its latched position in which latch mating structure 39 is out of engagement with valve actuator mating structure 37. As will be appreciated, latch 16 is preferably under
10 no loading as it is depicted in Fig. 6.

Fig. 7 depicts latch 16 in its unlatched position in which latch mating structure 39 is in engagement with, or mated with, valve actuator mating structure
15 37. As will be appreciated, latch 16 is preferably under no loading as it is depicted in Fig. 7.

Advantageously, latch 16 may only be moved from its latched position to its unlatched position by an
20 external force, i.e., a force applied by a user to latch 16. Such force must be sufficient to cause the distance between the two indentations of structure 39 of latch 16 to widen such that structures 37 and 39 engage. Accordingly, absent the application of such
25 force, the lighter of the present invention is normally maintained in its latched configuration.

As will be appreciated, latch 16 is under loading only during the transition between its latched
30 position and its unlatched position. Accordingly, latch 16 may be constructed from a relatively wide choice of materials which do not necessarily have to be able to withstand constant loading. Additionally, due to the relative materials from which valve
35 actuator 14 and latch 16 are constructed, and due to their relative shapes and configurations, only latch

19 NOV 1996

-30-

16 is deformed during the transition between its latched and unlatched positions. In the preferred embodiment illustrated in Figs. 6-8, such deformation
5 comprises a temporary widening of the distance between the two indentations of mating structure 39.

Moreover, latch 16 cannot be placed in and maintain a position which is intermediate that of the latched and unlatched positions.

10

Referring now to Fig. 8, valve actuator 14 and latch 16 are depicted in a configuration which is intermediate the latched configuration of Fig. 6 and the unlatched configuration of Fig. 7. As depicted in
15 Fig. 8, latch 16 is under loading and is temporarily deformed. The configuration depicted in Fig. 8 occurs for a brief period of time as latch 16 is moved from its latched position to its unlatched position, and from its unlatched position to its latched position.

20 As will be appreciated, the configuration depicted in Fig. 8 can not be self-maintained. Specifically, due to the component of force exerted by the valve actuator on the latch, the latch is biased toward the right of Fig. 8, away from the valve actuator and
25 toward its latched position. In other words, latch 16 is squeezed away from valve actuator 14 in the configuration depicted in Fig. 8. Such biasing enables the lighter to automatically return to its latched configuration once the lighter is actuated.

30 Of course, no such biasing exists in the configurations depicted in Figs. 6 or 7 since latch 16 is not under any loading in its latched (Fig. 6) and unlatched (Fig. 7) positions.

35

Advantageously, the materials and configurations of valve actuator 14 and latch 16 as well as their

19 NOV 1996

-31-

shapes cause valve actuator 14 to force latch 16 away from actuator 14 for all positions of the latch between the two extreme positions depicted in Figs. 6 and 7 thereby biasing the latch into its latched position once it becomes disengaged from the actuator.

Additionally, such materials, configurations and shapes facilitate retention of the lighter and, in particular, latch 16, in an unlatched or non-interfering position or configuration once the latch is placed in such an unlatched position or configuration, and until valve actuator 14 is depressed and released.

Fig. 9 schematically depicts a piezoelectric type lighter in which the present invention may be employed. The piezoelectric lighter comprises hammer and fuel release means 64, spark providing means 66, optional electrical cut-off switch 68, latch means 70 and valve means 71. The piezoelectric lighter operates in a conventional manner except for depression of hammer means 64 which is prevented by inclusion of latch means 70 operative in accordance with the present invention. Illustratively, such latch means comprises a latch which prevents the production of sparks. In particular, latch means 70 may prevent the production of sparks by electrically and/or mechanically isolating an energy source from the spark producing means. Alternatively, the latch means may be arranged to selectively prevent only the flow of fuel or it may be arranged to selectively prevent both the production of sparks and the flow of fuel. As depicted in Fig. 9, the lighter is in a latched configuration since latch means 70 is positioned so as to prevent actuation of hammer means 64. Additionally, switch 68 is depicted in an open,

19 NOV 1996

-32-

or off, position. As will be appreciated, incorporation of optional switch 68 requires that it be closed and that latch means 70 be unlatched in order for fuel to be ignited.

Fig. 10 schematically depicts the piezoelectric type lighter of Fig. 9 in an unlatched configuration. In particular, latch means 70 is positioned so as to enable actuation of hammer means 64. Additionally, switch 68 is depicted in a closed, or on, position. As will be appreciated, incorporation of optional switch 68 requires that it be closed and that latch means 70 be unlatched in order for fuel to be ignited.

Advantageously, the present invention automatically returns the latch to its latched position after the lighter has been activated and, in particular, after the valve actuator has been depressed and released. The biasing force described in conjunction with Fig. 8 facilitates such automatic return, as does a camming means 5 which is depicted in Figs. 1, 11 and 12 as a ramp on each side of the lighter. The ramps are preferably integrally formed with housing 12. Such automatic return will now be further described in conjunction with Figs. 1, 11 and 12.


In operation of the present invention, and as depicted in Figs. 1, 11 and 12, a user must first move latch 16 in an inward direction (Fig. 11) so as to sufficiently displace interfering portion 16B of latch 16 out of interference with interfering portion 12B of housing 12, and at least partially align interfering portion 16B of latch 16 with cavity 27 in housing 12 so as to ultimately permit depression of valve

19 NOV 1996

-34-

relative to valve actuator 14. Accordingly, such downward movement forces latch structure 39 to disengage from actuator structure 37, and latch 16 to
5 move outward toward its latched position. Additionally, and as described in conjunction with Figs. 6-8, the outward movement of latch 16 is also due to the relative shapes, materials and configurations of valve actuator 14 and latch 16 which
10 cause valve actuator 14 to force latch 16 outward. The outward movement of latch 16 from its unlatched position (Fig. 11) to its latched position (Fig. 1), in the preferred embodiment, may generally be considered to be initially due to camming means 5
15 which serves to disengage latch 16 and actuator 14, and then due to forces exerted by actuator 14 onto latch 16.

Thus, the presently preferred embodiment of the
20 invention may be placed in an unlatched configuration from its default latched configuration by sufficiently displacing interfering portion 16B relative to interfering portion 12B. This may be accomplished by moving interfering portion 16B into engagement or
25 alignment with cavity 27 thereby causing latch structure 39 to engage valve actuator structure 37. Advantageously, the path defined by such movement is the same for right-handed and left-handed users, and each of such users may unlatch the lighter with the
30 same relative ease. Thus, the lighter of the present invention enables every user, whether right-handed or left-handed, to actuate the lighter by suitably urging the latch out of interference with the lighter body, and does not require separate paths or structures to
35 accommodate right-handed and left-handed users.

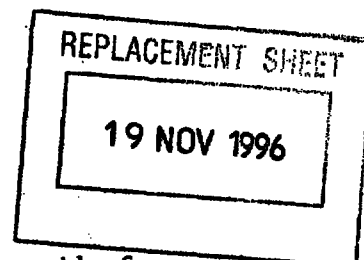

-35-

More specifically, by providing a single path for latch 16 to follow as the lighter is reconfigured from the latched configuration to the unlatched configuration, which path does not favor either of right-handed or left-handed users more than the other, although both such users employ the same path, such users will feel equally comfortable in actuating the lighter without detracting from the effectiveness of the lighter's latch.

Figs. 13-17 depict the sequence of operations required for the unlatching of the lighter by positioning interfering portion 16B in cavity 27 of housing 12. In particular, Fig. 13 depicts latch 16 and valve actuator 14 in the default or latched configuration. As will be appreciated, each of Figs. 6 and 13 depict the latch and the valve actuator in the same latched configuration. In this configuration, depression of valve actuator 14 by finger pressure on surface 31 is prevented by the contact between interfering portion 14A of valve actuator 14 and interfering portion 16A of latch 16 as well as the contact between interfering portion 16B of latch 16 and interfering portion 12B of housing 12. As depicted in Fig. 13, valve actuator 14 and latch 16 are prevented from any further downward movement since interfering portion 16B of latch 16 abuts interfering portion 12B of body 12, except for a small gap thereinbetween. For ease of illustration, the gap between portions 16B and 12B in the figures is not necessarily drawn to scale. Additionally, such a gap is not necessary for proper operation of the invention.

35

19 NOV 1996

-36-

Fig. 14 depicts latch 16 and valve actuator 14 in an unlatched configuration ready for depression of valve actuator 14. As will be appreciated, each of Figs. 7 and 14 depict the latch and valve actuator in the same unlatched configuration. Latch 16 including its interfering portion 16B have been moved inward as indicated by the arrow into alignment with cavity 27 which is illustratively formed in housing 12.

Advantageously, due to the engagement of valve actuator mating structure 37 with latch mating structure 39 (Fig. 7) when latch 16 is moved sufficiently inward, removal of holding pressure from finger actuatable portion 16C will not result in latch 16 slipping toward its latched position but will maintain the lighter in the unlatched configuration depicted in Fig. 14, until valve actuator 14 is depressed. In other words, the lighter may be readied for actuation and flame production by applying suitable force to finger actuatable portion 16C to move latch 16 including interfering portion 16B in an inward direction so as to cause valve actuator mating structure 37 to engage latch mating structure 39 thereby placing interfering portion 16B into alignment with cavity 27.

Application of finger pressure to the finger depressible surface of valve actuator 14 as depicted in Fig. 14 will yield the configuration depicted in Fig. 15 in which valve actuator 14 has been depressed thereby permitting fuel to flow through the valve and the fuel nozzle (not shown). In particular, and as more clearly depicted in Fig. 16, such depression of valve actuator 14 will cause compression of spring 30 and urging of fuel nozzle 20 upward and partially out of valve housing 28 and body portion 12. Such lifting

19 NOV 1996

-37-

of fuel nozzle 20 upward will permit fuel to flow from chamber 15 through the valve and out of nozzle 20 whereupon it will have been ignited by sparks produced by flint 22 and toothed surface 19 of spark-producing assembly wheel 18. Such fuel will continue to flow and burn as long as sufficient pressure is maintained on valve actuator 14. The downward movement of valve actuator 14 is limited by latch interfering portion 16B contacting a portion of housing 12 in the vicinity of cavity 27 and adjacent to housing interfering portion 12B, as depicted in Figs. 15 and 16.

As seen in Figs. 15 and 16, depression of valve actuator 14 urges latch 16 downward as well as outward toward its latched position. As long as valve actuator 14 remains depressed, such outward movement is limited by the contact between latch 16 and housing 12 in the general vicinity of portions 12B and 16B. Such outward movement is initially due to the contact between latch 16 and camming means 5 (Figs. 1, 11, 12) as the latch is moved downward. Such contact causes latch 16 to disengage from actuator 14 by disengaging latch structure 39 from actuator structure 37 causing latch 16 to move outward. The outward movement of latch 16 is also due to the relative shapes, materials and configurations of valve actuator 14 and latch 16 which cause actuator 14 to force latch 16 outward as described in conjunction with Figs. 6-8. Accordingly, latch 16 is urged outward by camming means 5 as well as valve actuator 14.

As depicted in Fig. 17, once pressure is removed from valve actuator 14, the valve actuator will move upward due to the biasing force provided by spring 30, and the flame will be extinguished. Advantageously,

19 NOV 1996

-38-

as valve actuator 14 moves upward, latch 16 moves toward its latched position. Additionally, as valve actuator 14 moves upward so does latch 16 due to the portion of latch 16 which is within groove 33 of valve actuator 14 (Fig. 3). As described in conjunction with Figs. 15 and 16, depression of valve actuator 14 causes latch 16 to move outward and to disengage from actuator 14 by disengaging latch structure 39 from actuator structure 37. However, even when valve actuator 14 is fully depressed, latch 16 is not fully outward and not fully latched due to the interference between the latch and the housing in the vicinity of housing interference portion 12B and latch interfering portion 16B as best seen in Figs. 15 and 16. Latch 16 will enter its fully latched position only when the valve actuator is moved fully upward thus enabling the latch to move fully outward. As described in conjunction with Figs. 6-8 as well as Figs. 15 and 16, the relative shapes, materials and configurations of valve actuator 14 and latch 16 cause actuator 14 to force latch 16 fully outward.

While it is apparent that the invention herein disclosed is well-calculated to fulfill the objects above stated, it will be appreciated that numerous modifications and embodiments may be devised by those skilled in the art, and it is intended that the appended claims cover all such modifications and embodiments as fall within the true spirit and scope of the present invention.

More specifically, the latch means and lighter disclosed and claimed herein are not limited to use in disposable lighters. Moreover, the present invention is not limited to a latch means in which a latch is

19 NOV 1996

-39-

moved solely in an inward direction to an unlatched position. Similarly, the latch may be positioned at other locations within the lighter body so as to
s prevent depression of the valve actuator by interfering with other portions of the valve actuator.



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-40-

THE CLAIMS

We Claim:

1. A flame producing lighter which comprises:
 - 5 a housing defining a reservoir for containing fuel under pressure;
valve means arranged for selective actuation between a normally closed position which prevents exit of said fuel from said reservoir, and an open position
10 which permits exit of said fuel from said reservoir through said valve means;
means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition
15 of said fuel;
means normally positioned for preventing actuation of said valve means to the open position, said valve actuation prevention means being incapable of vertical movement when in said normal position,
20 said valve actuation means being movable out of said normal position inward into a second position only by application of an external force, said valve actuation prevention means being capable of vertical movement when in said second position; and
25 means for selectively moving said valve actuation prevention means to said second position whereby actuation of said valve means to the open position is permitted thereby selectively permitting exit of said fuel from said valve means and ignition
30 of said fuel by sparks produced by said spark producing means,
wherein said valve actuation prevention means automatically returns to said normal position after actuation of said lighter.

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-41-

2. The flame producing lighter according to claim 1 wherein said valve means is actuated to the open position by actuator means and said means for preventing actuation of said valve means to the open position comprises interference means for preventing movement of said actuator means, said valve actuation interference means being selectively movable to said second position out of interference with said valve actuator means, and said valve actuation prevention means being under no loading when in each of said normal and said second positions.

3. The flame producing lighter according to claim 2 wherein said valve actuation interference means is normally retained in a valve actuation interference position by its interaction with said actuator means, the movement thereof to said second position out of interference with said valve actuator means being resiliently provided.

4. The flame producing lighter according to claim 3 wherein said valve actuation interference means is retained in said second position by its interaction with said actuator means, the movement thereof from said valve actuation interference position to said second position being resiliently provided.

5. The flame producing lighter according to claim 4 wherein the resilient movement of said valve actuation interference means facilitates the return of said valve actuation interference means to its interfering position once the valve actuator is released, thus preventing the valve means from opening.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-42-

6. The flame producing lighter according to claim 5 wherein said valve actuation interference means is a latch having an interfering portion which is movable inward into alignment with a cavity in said housing, whereby fuel exits said valve means upon depression of said valve actuator, and the latch moves back to its interfering position after the valve actuator is depressed and released.
7. The flame producing lighter according to claim 6 wherein said latch is slideably mounted to said valve actuator.
8. The flame producing lighter according to claim 6 wherein, upon depression of said valve actuator, said latch is cammed out of its second position by a camming means formed within said housing.
9. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.
10. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises electric spark-producing means.
11. The flame producing lighter according to claim 5 wherein said means for selectively producing sparks comprises piezoelectric spark-producing means.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-43-

12. The flame producing lighter according to claim 1 further comprising means to retain said valve actuation prevention means in said second position.

5

13. The flame producing lighter according to claim 1 wherein said valve actuation prevention means is movable along only a single path from said normal position to said second position, said single path being equally suitable for right-handed as well as left-handed users.

10

14. A flame producing lighter resistant to unauthorized use and normally maintained in a latched configuration comprising:

15

a housing;

fuel supply means for supplying fuel to be ignited;

ignition means for igniting said fuel;

20

valve means for controlling the flow of said fuel;

a valve actuator which normally prevents the flow of said fuel when in a first position and is depressible to a second position which permits actuation of said fuel supply means thereby permitting fuel to flow out from said fuel supply means;

25

a latch positioned so as to normally prevent depression of said depressible valve actuator and normally maintain said lighter in said latched configuration,

30

wherein inward movement of said latch enables a tip portion of said latch to become aligned with a cavity in said housing, said cavity being sufficient in size to accommodate said tip portion so as to enable said valve actuator to be depressed, and

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-44-

wherein said inward movement places said lighter in an unlatched configuration in which said valve actuator is capable of being depressed, thereby
5 permitting fuel to flow.

15. The flame producing lighter according to claim 14 wherein said ignition means comprises a spark-producing wheel and a flint urged against said
10 wheel and wherein sparks are produced by rotation of said wheel.

16. The flame producing lighter according to claim 14 wherein said ignition means comprises
15 electric spark-producing means.

17. The flame producing lighter according to claim 14 wherein said ignition means comprises piezoelectric spark-producing means.
20

18. The flame producing lighter according to claim 14 wherein said latch is constrained to move along only a single path when said lighter is configured from said latched configuration to said
25 unlatched configuration.

19. The flame producing lighter according to claim 14 wherein said lighter is maintained in each of said latched and unlatched configurations by the
30 interaction between said latch and said valve actuator.

20. The flame producing lighter according to claim 14 wherein said latch is slideably attached to
35 said valve actuator between said latched and unlatched configurations.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-45-

21. The flame producing lighter according to claim 20 wherein said latch is under no loading in each of said latched and said unlatched configuration.

5

22. The flame producing lighter according to claim 14 wherein depression of said valve actuator forces said latch downward and wherein a camming means forces said latch outward and the lighter out of its unlatched configuration.

10

23. The flame producing lighter according to claim 14 wherein said latch comprises a portion normally positioned between at least a portion of said valve actuator and at least a portion of said housing.

15

24. The flame producing lighter according to claim 14 wherein said unlatched configuration is maintained until said valve actuator is depressed and released.

20

25. A flame producing lighter which comprises:
a housing defining a reservoir for containing a combustible gaseous medium under pressure;

25

valve means;
means mounted for selective actuation of said valve means between a normally closed position which prevents exit of said gaseous medium from said reservoir, and an open position which permits exit of said gaseous medium from said reservoir through said valve means;

30

means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition of said gaseous medium; and

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-46-

5 a latch having a finger actuatable portion
and an interfering portion connected thereto, said
latch being positioned so as to interfere with the
movement of said valve actuation means for preventing
actuation of said valve means to the open position,
said finger actuatable portion being movable so as to
move said latch interfering portion out of
interference with said housing and into alignment with
10 a cavity of said housing only by application of an
external user applied force.

26. The flame producing lighter according to
claim 25 wherein said finger actuatable portion of
15 said latch is movable inward so as to move said latch
interfering portion into alignment with said cavity.

27. The flame producing lighter according to
claim 25 wherein said finger actuatable portion is
20 constrained to move along only a single path as said
latch interfering portion is moved out of interference
with said housing portion.

28. The flame producing lighter according to
25 claim 25 wherein depression of said valve actuation
means forces said latch downward and against a camming
means thereby forcing said latch outward.

29. The flame producing lighter according to
30 claim 25 wherein said latch is retained in each of its
interfering and non-interfering positions by the
interaction between said latch and said valve
actuation means.


30. The flame producing lighter according to
claim 25 wherein said latch is slideably attached to

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED



-47-

said valve actuation means and is capable of being depressed into said cavity only when in said out of interference position.

5

31. The flame producing lighter according to claim 25 wherein said interfering portion of said latch is positioned between at least a portion of said valve actuation means and at least a portion of said housing.

10

32. The flame producing lighter according to claim 25 further comprising means to retain said latch interfering portion in said out of interference position until said valve means is moved to the open position.

15

33. The flame producing lighter according to claim 25 wherein said latch is under no loading in each of its interference and non-interference positions.

20

34. A flame producing lighter which comprises:
a housing defining a reservoir for
containing a combustible gaseous medium under pressure, said housing including a first interfering portion;

25

valve means;

actuator means arranged for selective
actuation of said valve means between a normally closed position which prevents exit of said gaseous medium from said reservoir and an open position which permits exit of gaseous medium from said reservoir through said valve means;

30

means for preventing movement of said
actuator means by interfering with the movement

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-48-

thereof, having a finger actuatable portion and a
second interfering portion, said first and second
interfering portions being normally in alignment with
5 each other thereby preventing movement of said
actuator means, said finger actuatable portion being
selectively movable so as to move said second
interfering portion out of alignment with said first
interfering portion, said second interfering portion
10 being normally retained in a valve actuation
interference position, the movement thereof to a
position out of interference with said first
interfering portion being resiliently provided so as
to facilitate return of said second interfering
15 portion to its position in interference with said
first interfering portion when said valve actuator is
depressed and released, thus preventing said valve
nozzle from opening;

means for selectively producing sparks at a
20 location proximate the gaseous medium exit opening of
said valve means thereby selectively causing ignition
of said gaseous medium; and

means for retaining said second interfering
portion out of alignment with said first interfering
25 portion.

35. The flame producing lighter according to
claim 34 wherein said movement of said finger
actuatable portion which causes said second
30 interfering portion to move out of alignment with said
first interfering portion is constrained to movement
in a single path.

36. The flame producing lighter according to
35 claim 34 wherein said movement of said finger
actuatable portion which causes said second

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-49-

interfering portion to move out of alignment with said first interfering portion comprises movement in an inward direction.

5

37. The flame producing lighter according to claim 34 wherein said valve actuator prevention means is retained in each of its interference and non-interference positions by its interaction with said actuator means.

10

38. The flame producing lighter according to claim 37 wherein said valve actuator prevention means is under no loading in each of its interference and non-interference positions.

15

39. The flame producing lighter according to claim 37 wherein said valve actuator prevention means is slideably attached to said actuator means.

20

40. The flame producing lighter according to claim 37 further comprising camming means to force said valve actuator prevention means out of its non-interference position and toward its interference position upon depression of said valve actuator.

25

41. A fuel cut-off mechanism for use in combination with a lighter which comprises:

means for normally preventing actuation of a fuel supply;

30

means for selectively permitting actuation of said fuel supply including a depressible valve actuator which upon depression actuates said fuel supply thereby permitting fuel to flow out from said fuel supply; and

35

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-50-

a latch which normally interferes with depression of said depressible valve actuator, said latch being arranged such that inward movement of said
5 latch provides a void, the void being sufficient in size to enable depression of said valve actuator and downward movement of said latch.

42. The fuel cut-off mechanism of claim 41
10 wherein said latch and said valve actuator include means to maintain said latch in said interfering position under no load.

43. The fuel cut-off mechanism of claim 41
15 wherein said latch and said valve actuator include means to maintain said latch in said non-interfering position under no load.

44. The fuel cut-off mechanism of claim 41
20 wherein at least a portion of said latch is normally positioned between at least a portion of said valve actuator and at least a portion of a main body housing of said lighter so as to normally interfere with depression of said valve actuator.

25

45. A flame developing lighter comprising:

- (a) a housing;
- (b) fuel supply means for supplying fuel to
be ignited;
- 30 (c) ignition means for igniting said fuel;
- (d) valve means for selectively permitting
flow of said fuel; and
- (e) means for selectively unlatching said
lighter from a normally latched configuration in which
35 fuel is prevented from flowing, said means for
selectively unlatching said lighter including:

This Sheet Has Been Replaced





* C L M S *

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-51-

(i) a valve actuator which normally prevents release of fuel from said fuel supply when in a first position and is depressible to a second
5 position which permits release of said fuel thereby permitting fuel to flow out from said fuel supply means; and

(ii) a latch which normally prevents depression of said depressible valve actuator, said
10 latch having an interfering portion being normally positioned in alignment with an interfering portion of said housing thereby preventing depression of said valve actuator,

wherein inward movement of said interfering
15 portion of said latch moves said interfering portion of said latch out of alignment with said interfering portion of said housing, said latch experiencing no loading when in said out of alignment position, and provides said lighter in an unlatched configuration in
20 which said valve actuator is capable of being depressed, thereby permitting fuel to flow.

46. The flame developing lighter according to claim 45 wherein said latch experiences no loading
25 when in said interfering position.

47. A flame producing lighter which comprises:
a housing;
a reservoir within said housing for
30 containing a combustible gaseous medium under pressure;

valve means;
a depressible valve actuator which actuates said valve means between a normally closed
35 position which prevents exit of said gaseous medium from said reservoir, and an open position which

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-52-

permits exit of gaseous medium from said reservoir
through said valve means;

means for selectively producing sparks

- 5 at a location proximate the gaseous medium exit
opening of said valve means thereby selectively
causing ignition of said gaseous medium;

- an interference member, at least a
portion of which is normally under no loading and
10 positioned so as to prevent depression of said valve
actuator, said interference member having a finger
actuatable portion wherein application of a suitable
biasing force in an inward direction by a user to said
finger actuatable portion places said lighter in an
15 unlatched configuration enabling depression of said
valve actuator;

means for retaining said interference
member in the valve actuation position at least until
said valve actuator is depressed; and

- 20 means for returning said interference
member to the valve actuation prevention position once
said valve actuator is depressed and released, said
retaining means including camming means for camming
said interference member toward its actuation
25 prevention position.

48. The flame producing lighter according to
claim 47 wherein at least a portion of said
interference member is normally positioned between at
30 least a portion of said valve actuator and at least a
portion of said housing.

49. The flame producing lighter according to
claim 47 wherein said unlatched configuration is
35 maintained with said interference member under no
loading.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACED

19 NOV 1996

-53-

50. A flame producing lighter which comprises:
- a housing;
 - 5 a reservoir within said housing for containing a combustible gaseous medium under pressure;
 - valve means for selectively permitting flow of said combustible gaseous medium;
 - 10 a valve actuator mounted for selective actuation of said valve means between a normally closed position which prevents exit of said gaseous medium from said reservoir, and an open position which permits exit of gaseous medium from said reservoir
 - 15 through said valve means;
 - means for selectively producing sparks at a location proximate the gaseous medium exit opening of said valve means thereby selectively causing ignition of said gaseous medium; and
 - 20 an interference member configured, dimensioned and adapted to normally interfere with said valve actuator for preventing actuation of said valve means to the open position, said interference member being movable out of interference with said
 - 25 valve actuator by application of a user applied force in an inward direction and being returnable automatically to said valve actuation prevention position after said valve means is moved to the open position and said valve actuator released,
 - 30 wherein said movement of said interference member provides a void between a portion of said valve actuator and a portion of said housing to enable said valve actuator to be depressed, and
 - wherein said member normally interferes
 - 35 with said valve actuator by normally being precluded from moving downward, and moveable solely in an inward

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

-54-

REPLACEMENT SHEET

19 NOV 1996

direction so as to subsequently be permitted to move downward upon depression of said valve actuator.

5 51. The flame producing lighter of claim 50 wherein said member is movable inward from said interfering position to said non-interfering position.

10 52. The flame producing lighter of claim 50 wherein said inward movement of said interference member places said lighter in an unlatched configuration in which said interference member is retained in its inward position at least until said valve actuator is depressed.

15 53. The flame producing lighter of claim 50 wherein at least a portion of said interference member is normally positioned between at least a portion of said valve actuator and at least a portion of said housing.

20 54. An improved lighter of the type having valve means for selectively releasing fuel, means for igniting said fuel, valve actuator means for actuating
25 said valve means so as to release fuel, and interference means positioned so as to normally interfere with the actuation of said valve actuator means, said valve means including a fuel nozzle which expels fuel when said fuel nozzle is lifted upward by
30 said valve actuator means, wherein the improvement comprises a compensator spring means to compensate for movement of said valve actuator means when said interference means is normally positioned so as to interfere with the actuation of said valve actuator
35 means.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

-55-

55. The improved lighter of claim 54 wherein
said compensator spring means is positioned between
said valve actuator means and a portion of said fuel
5 nozzle so as to urge said fuel nozzle downward.

56. The improved lighter of claim 54 wherein
said compensator spring means is a metallic coiled
spring.

10

57. An improved lighter of the type having valve
means for selectively releasing fuel, means for
igniting said fuel, and means for actuating said valve
means so as to release fuel, said valve means
15 including a fuel nozzle which expels fuel when said
fuel nozzle is lifted upward by said valve actuator
means, said fuel nozzle being normally biased downward
by said valve actuator means, wherein the improvement
comprises a compensator spring means which maintains
20 said fuel nozzle in its downward position when said
valve actuator is initially actuated.

58. The improved lighter of claim 57 wherein
said compensator spring means is positioned between
25 said valve actuator means and a portion of said fuel
nozzle so as to urge said fuel nozzle downward.

59. The improved lighter of claim 57 wherein
said compensator spring means is a metallic coiled
30 spring.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT

19 NOV 1996

SELECTIVELY ACTUATABLE LIGHTER

ABSTRACT

A selectively actuatable lighter device (10) is disclosed which includes a body defining reservoir (12) for containing a combustible gaseous medium such as butane, and having a valve (20) arranged to be selectively actuated between a normally closed position and an open position which permits the exit of the gaseous medium. Such lighter (10) can selectively produce sparks at a location (19,22) proximate to the gaseous medium exit to ignite the gaseous medium. Such lighter device (10) embodies a resiliently releasable valve actuator (14) which normally prevents actuation of the valve (22). The valve actuator (14) includes an interfering portion (14A) which is selectively movable to a position out of interference with an interfering portion (12B) of the lighter body, so that the gaseous medium may be released and ignited by the sparks. Once the valve actuator (14) is depressed and released, it returns to its closed or latched position to prevent actuation of the valve to the open position. To "re-use" the lighter, the valve actuator (14) must again be moved to an unlatched position so that the valve (22) can be actuated for subsequent ignition of the gaseous medium.

FIGURE 14

This Sheet Has Been Replaced



19 NOV 1996

FIG. 2

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

2 / 6

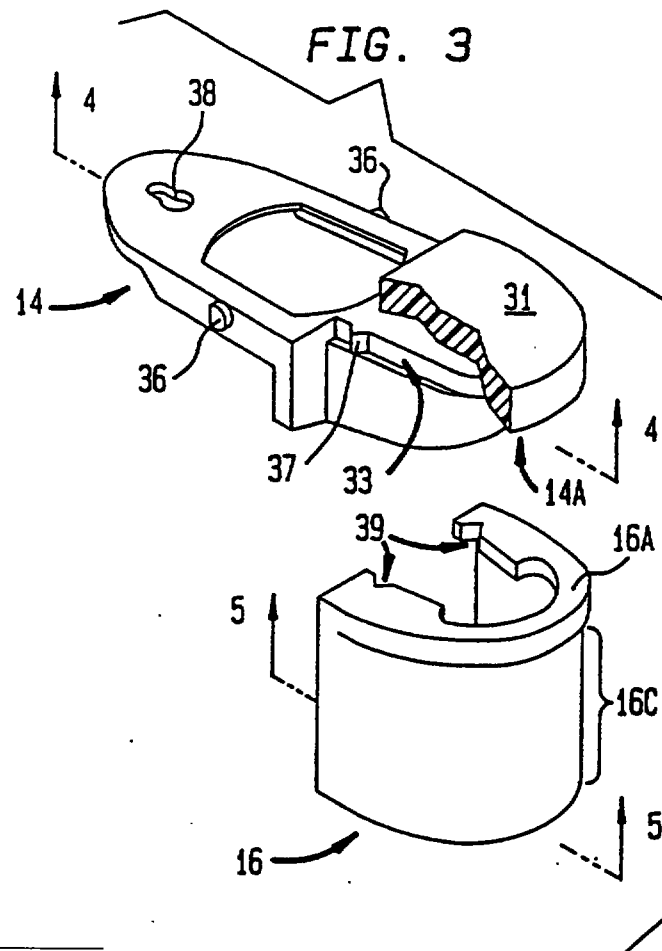

This Sheet Has Been Replaced



FIG. 4


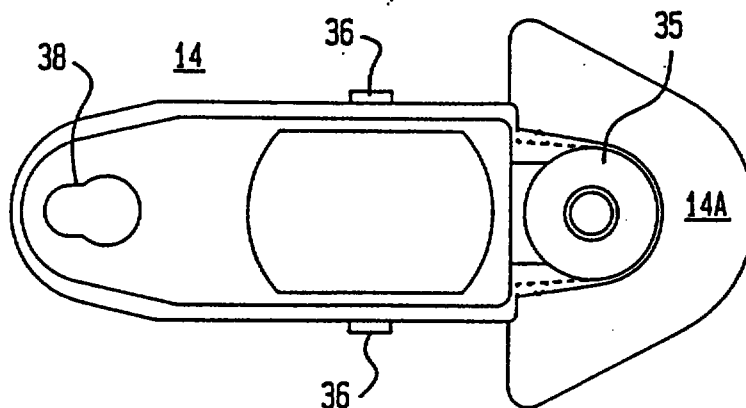


FIG. 5

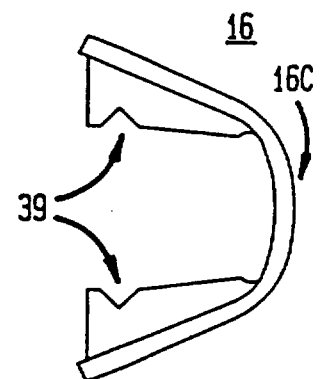

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT

19 NOV 1996

FIG. 6

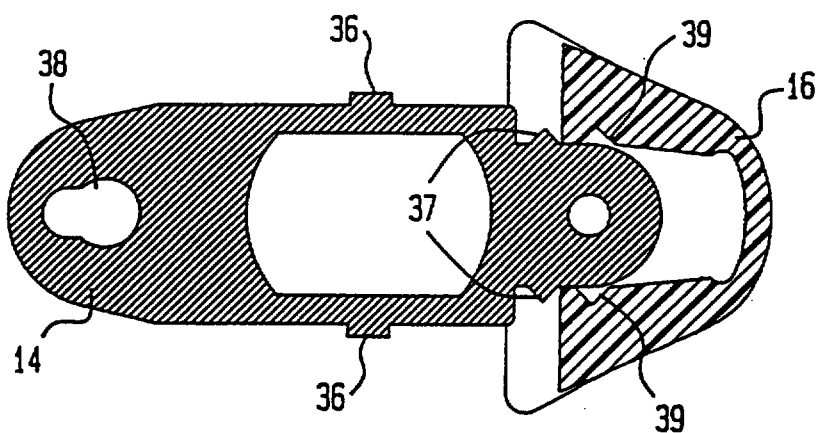


FIG. 7



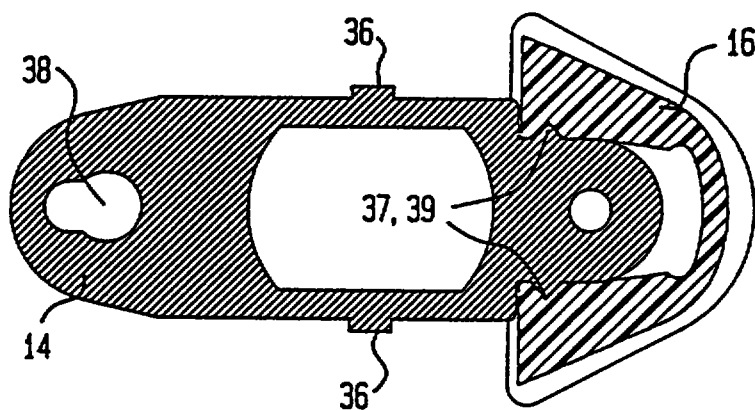


FIG. 8

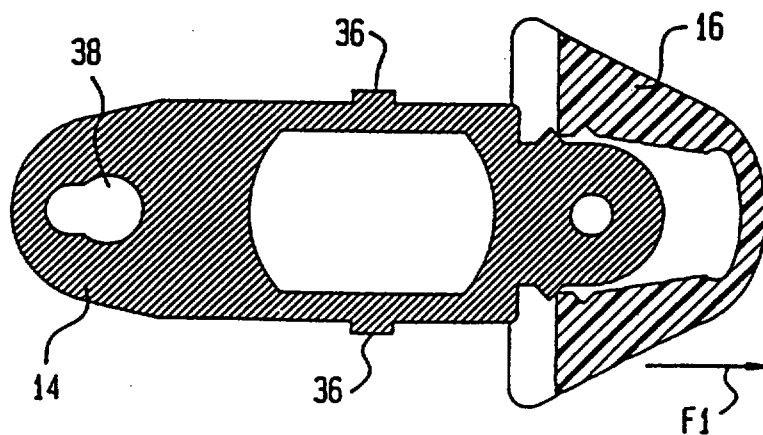

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996


FIG. 9

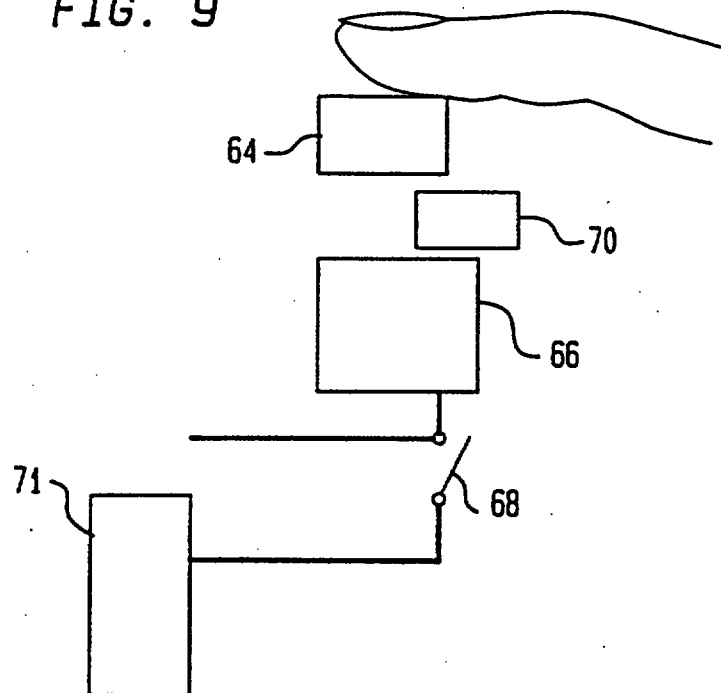

This Sheet Has Been Replaced



FIG. 10

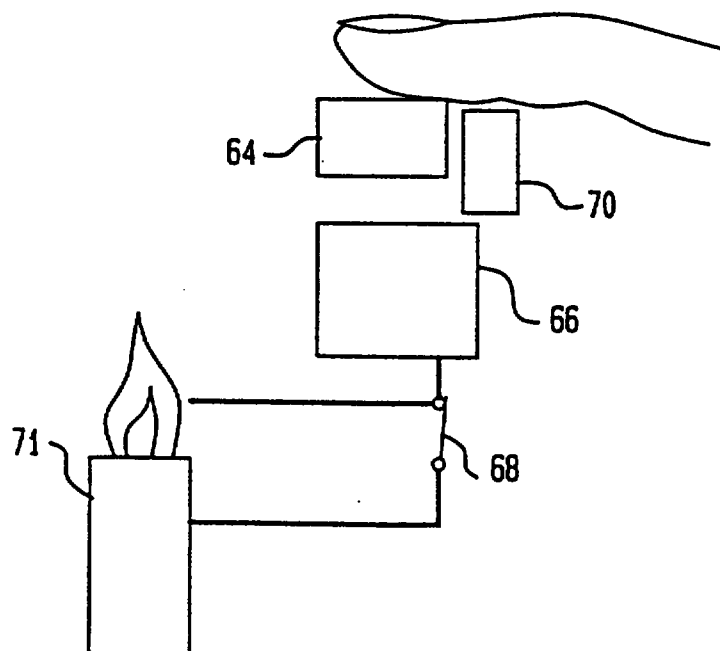

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

FIG. 11


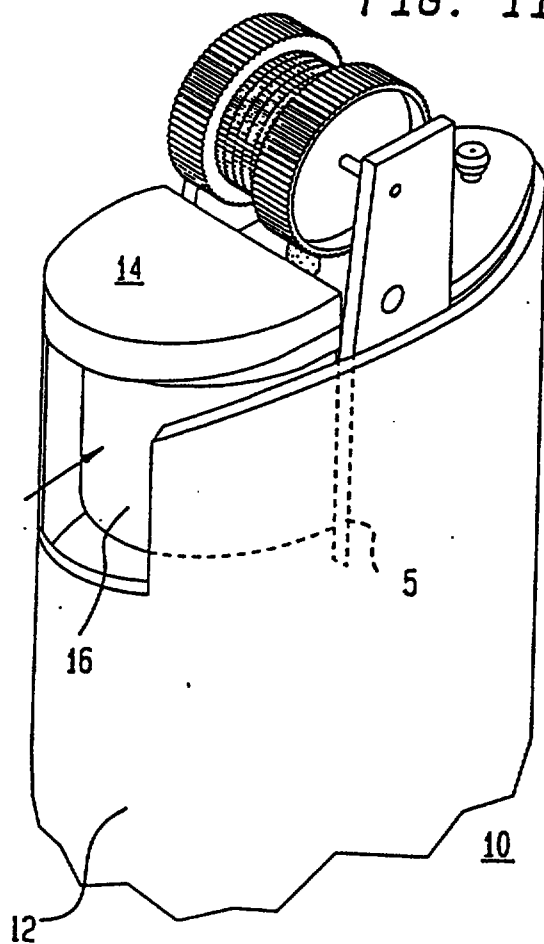


FIG. 12



This Sheet Has Been Replaced

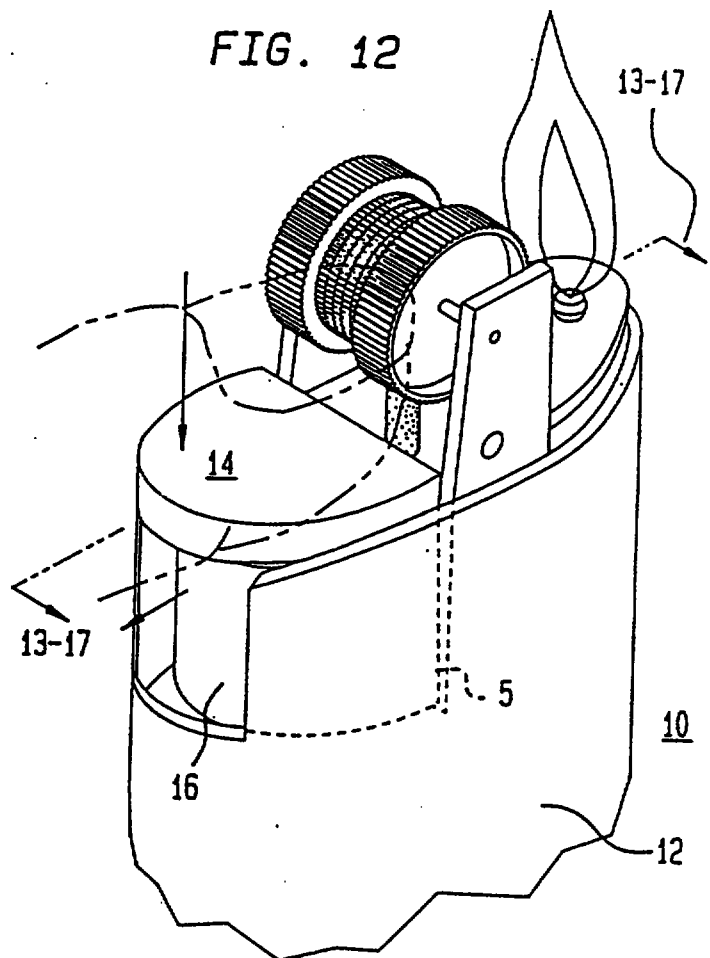

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

FIG. 13

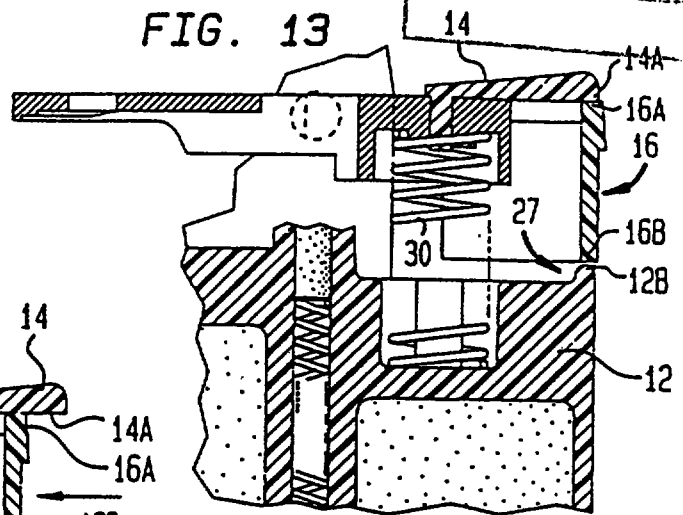


FIG. 14

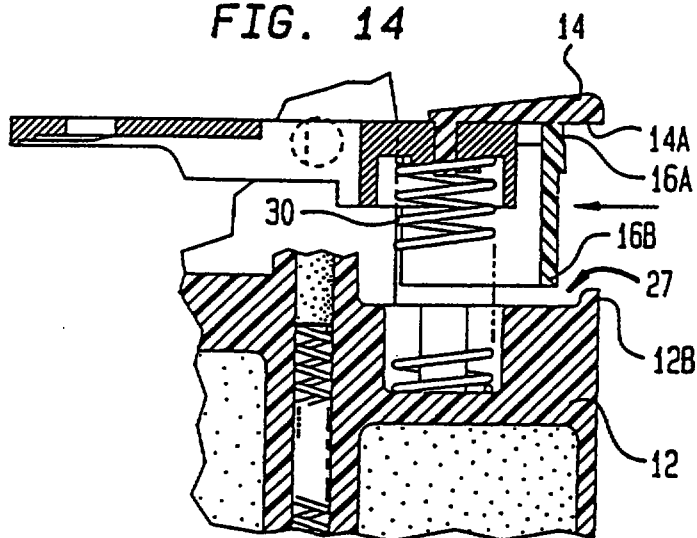


FIG. 15


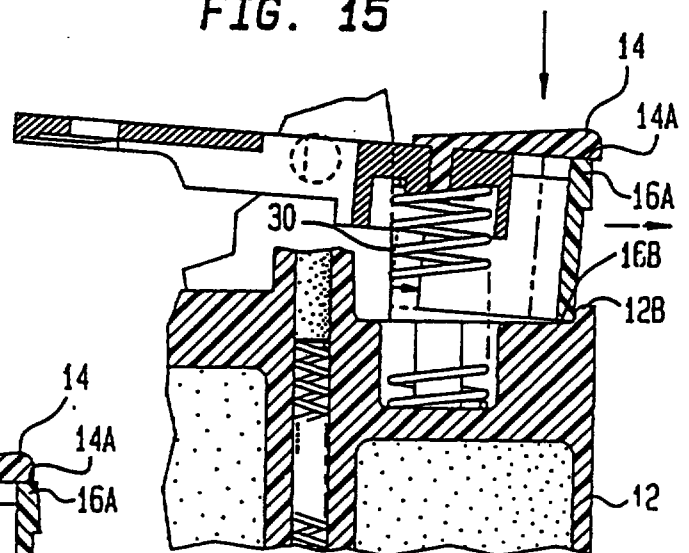


FIG. 17




This Sheet Has Been Replaced

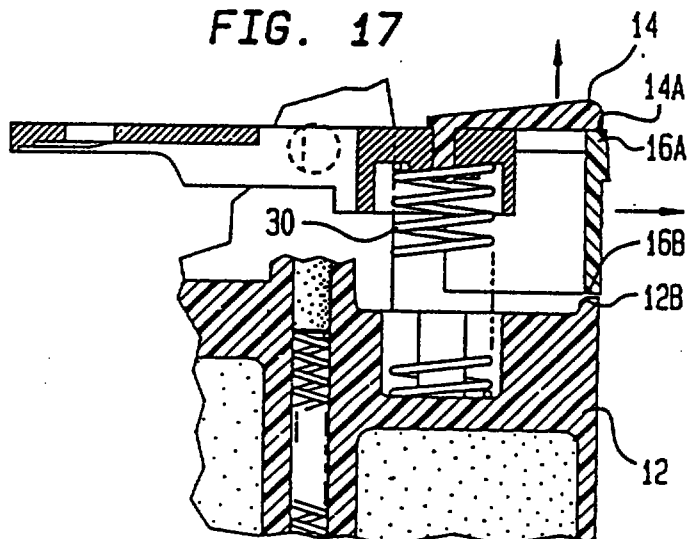

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

19 NOV 1996

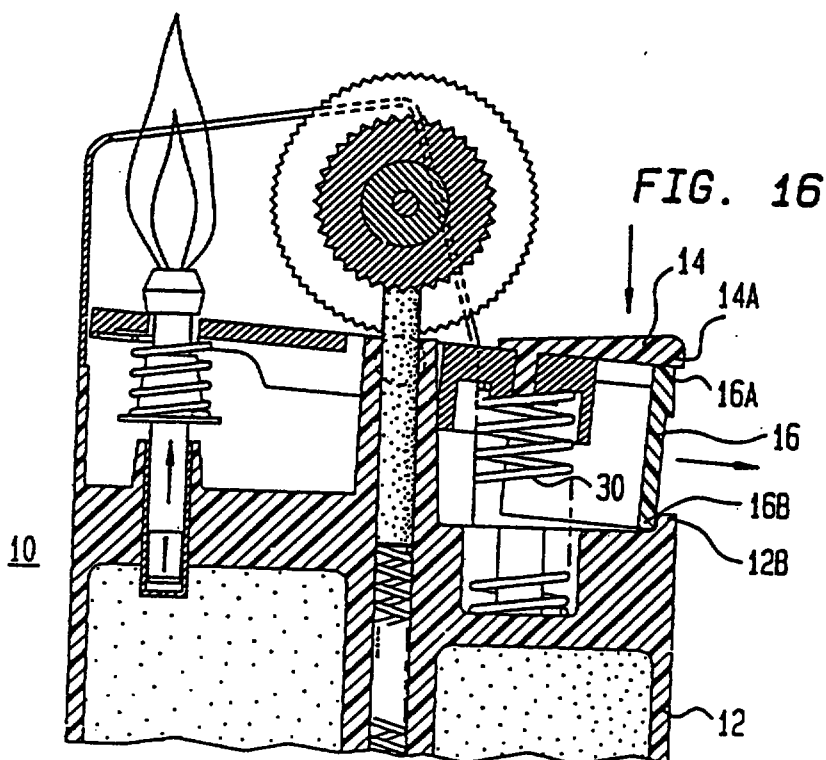

This Sheet Has Been Replaced



5229

9606667-5

REPLACEMENT SHEET

18 MAR 1997

- 1 -

FIG. 1


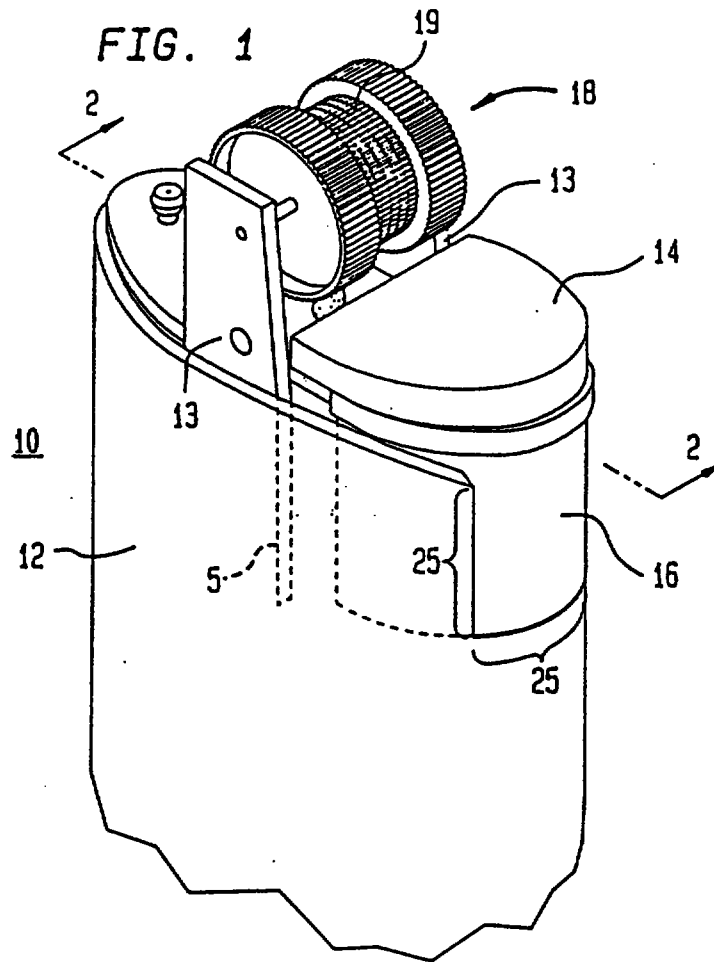


FIG. 2

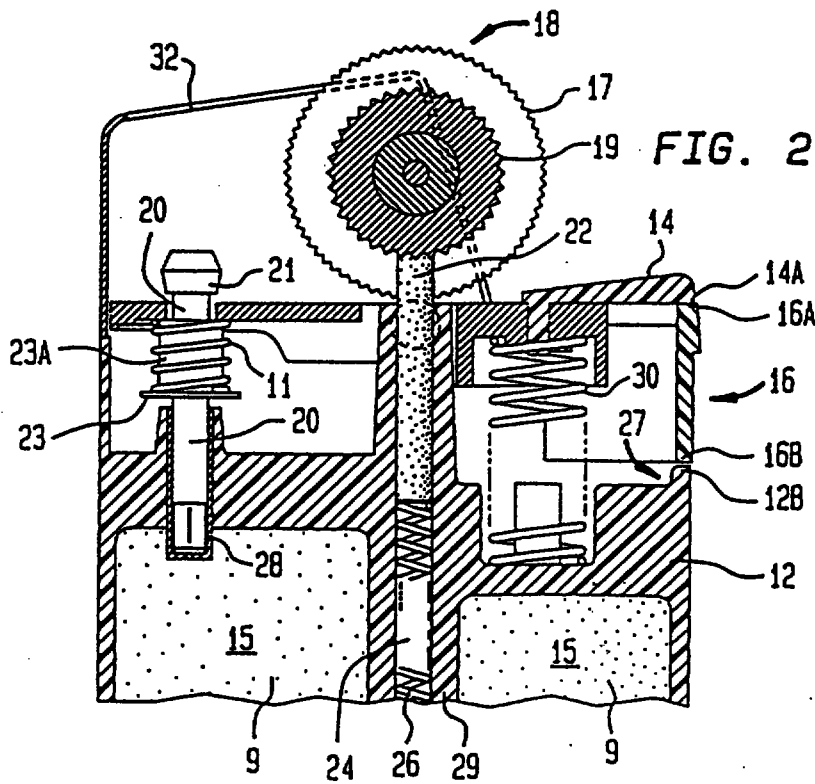

9-7024000

18 MAR 1997

- 2 -

FIG. 3

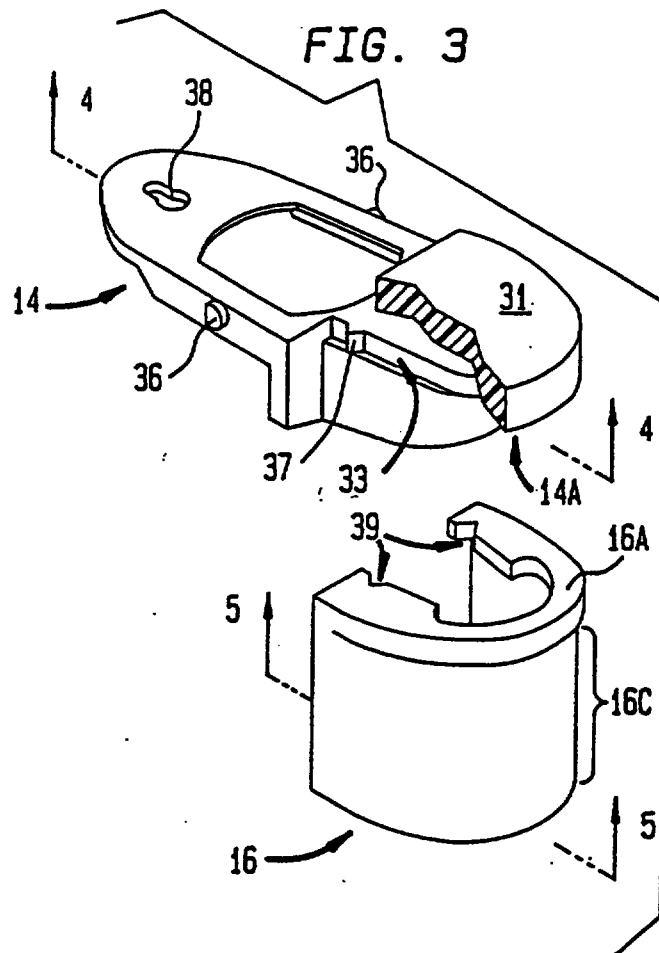


FIG. 4


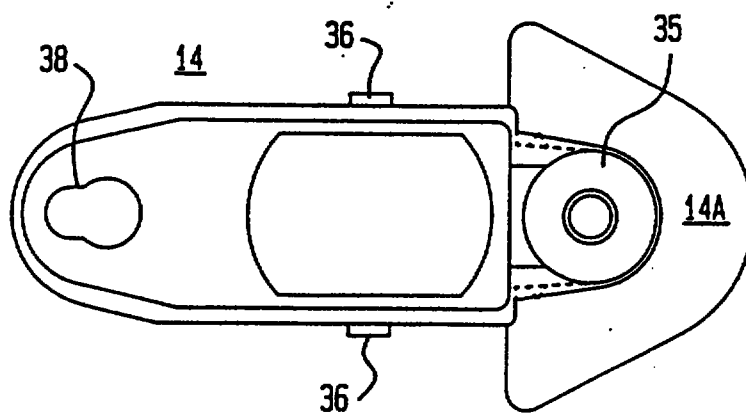


FIG. 5

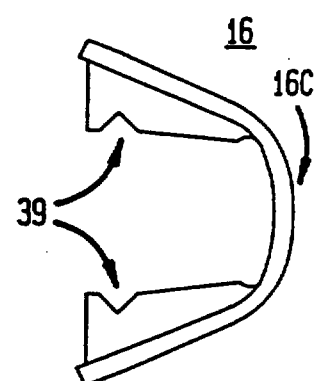

18 MAR 1997

FIG. 6

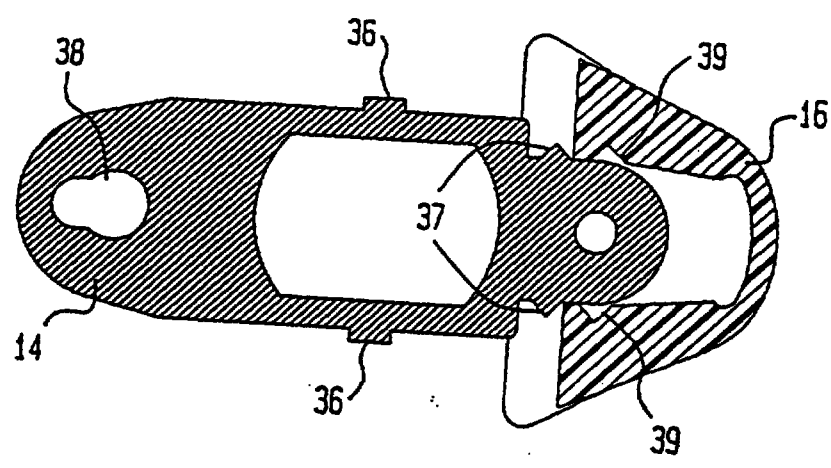


FIG. 7


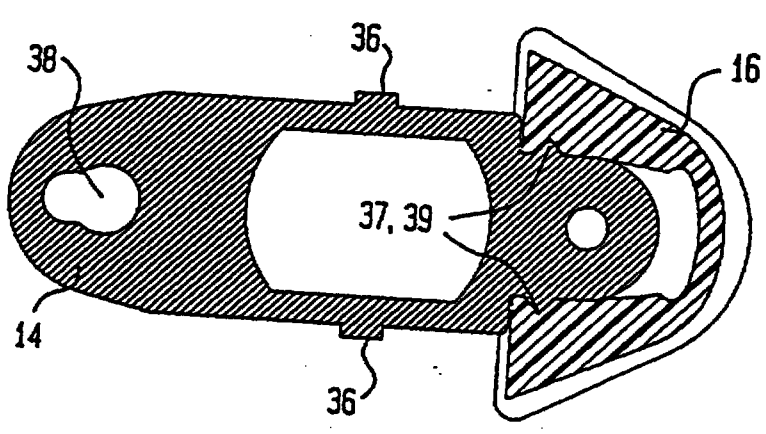


FIG. 8

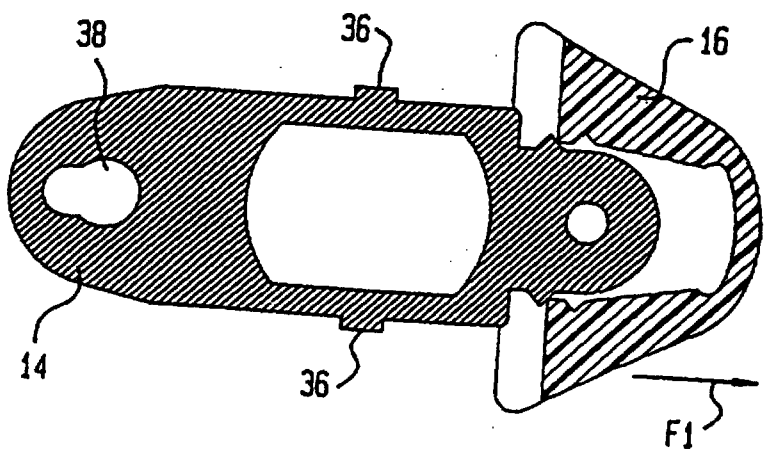

18 MAR 1997

- 4 -

FIG. 9

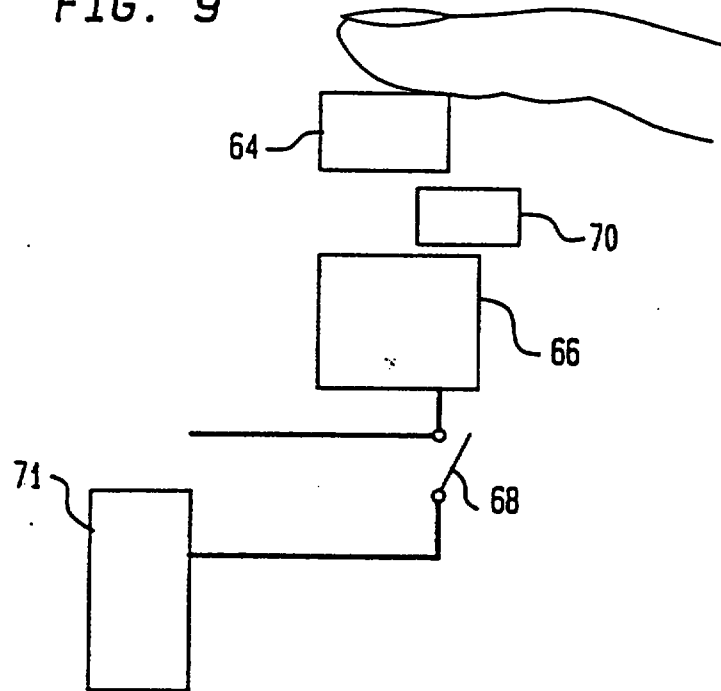
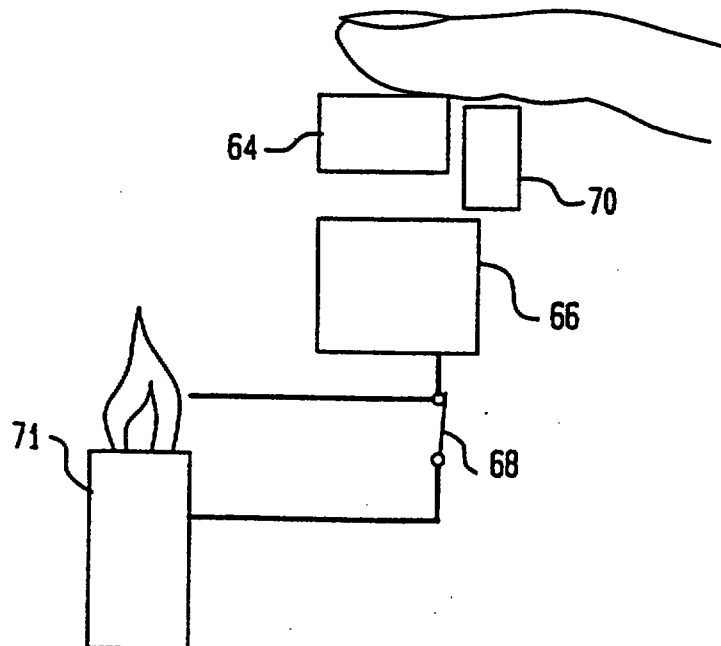


FIG. 10



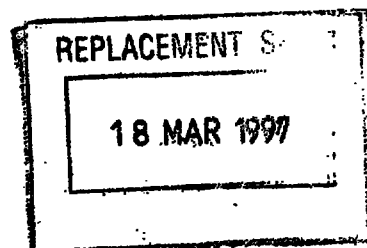


FIG. 11


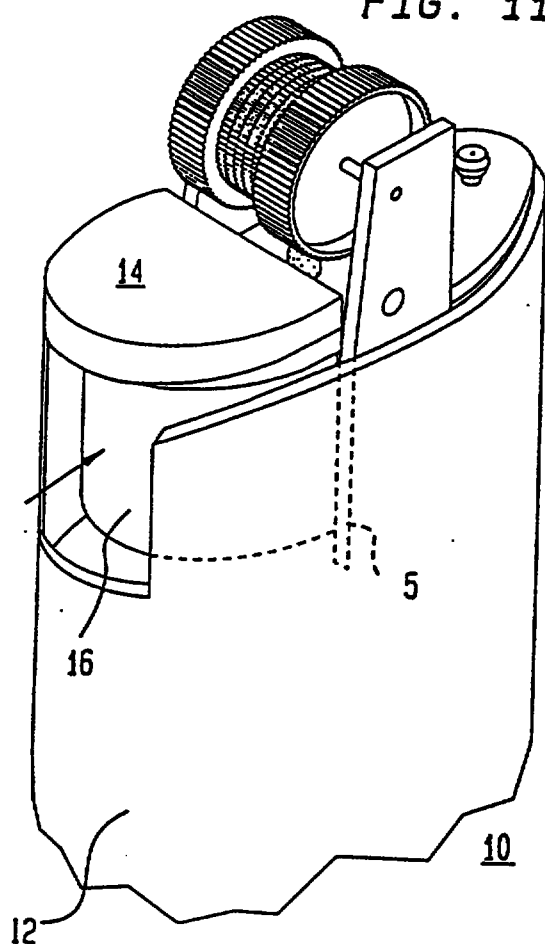


FIG. 12

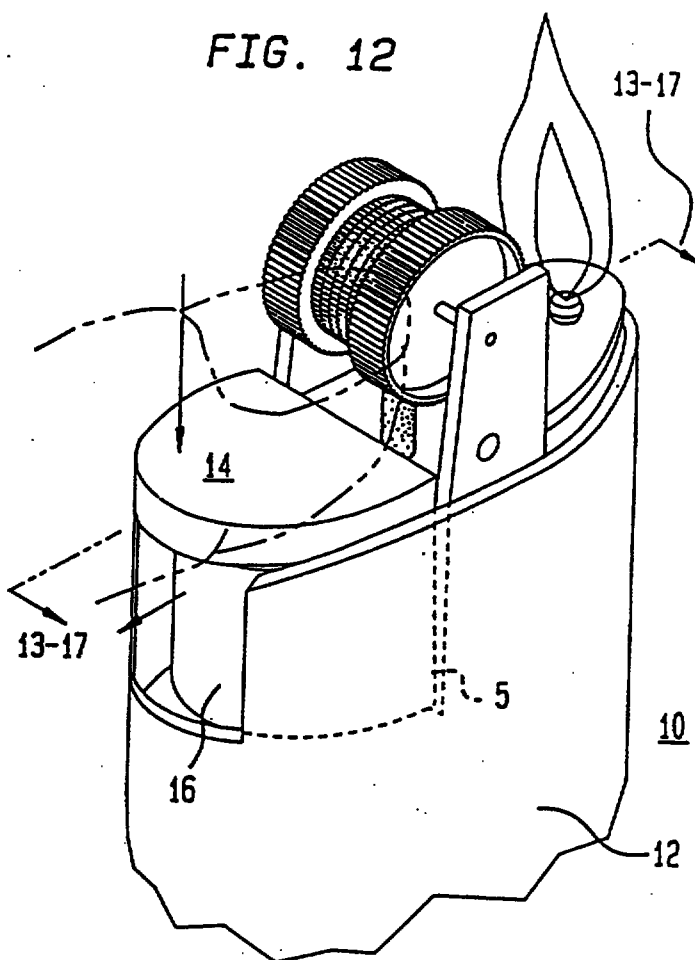

18 MAR 1997

FIG. 13

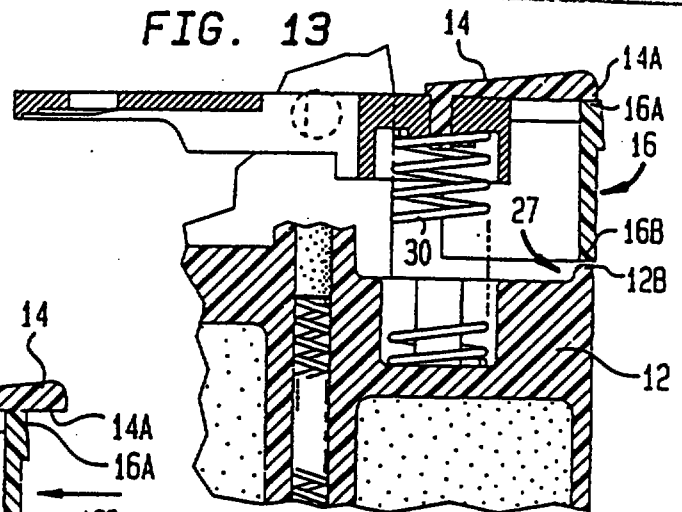


FIG. 14

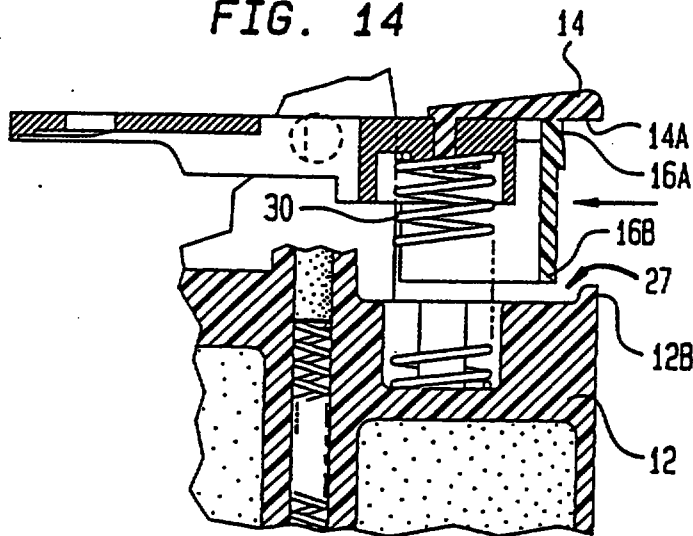


FIG. 15




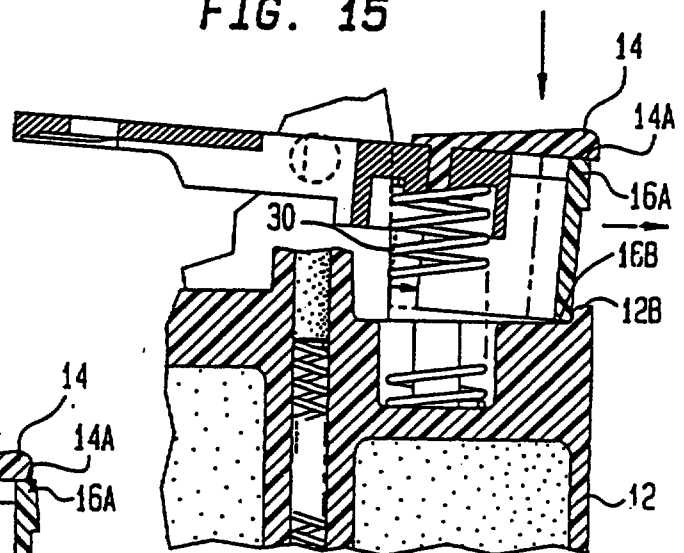


FIG. 17

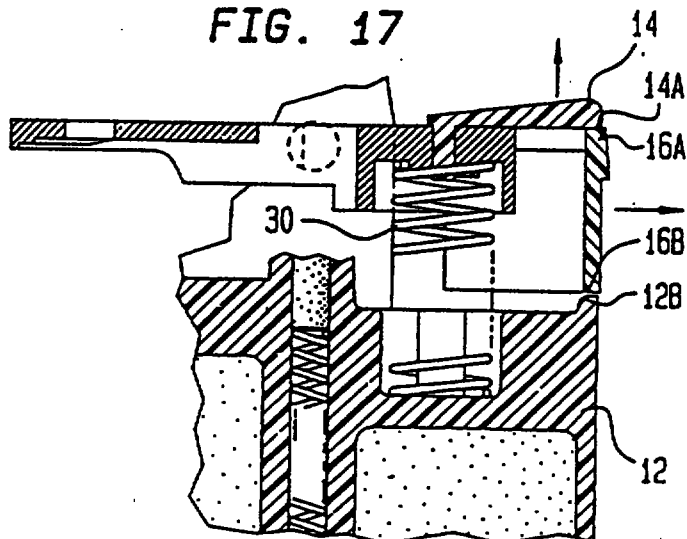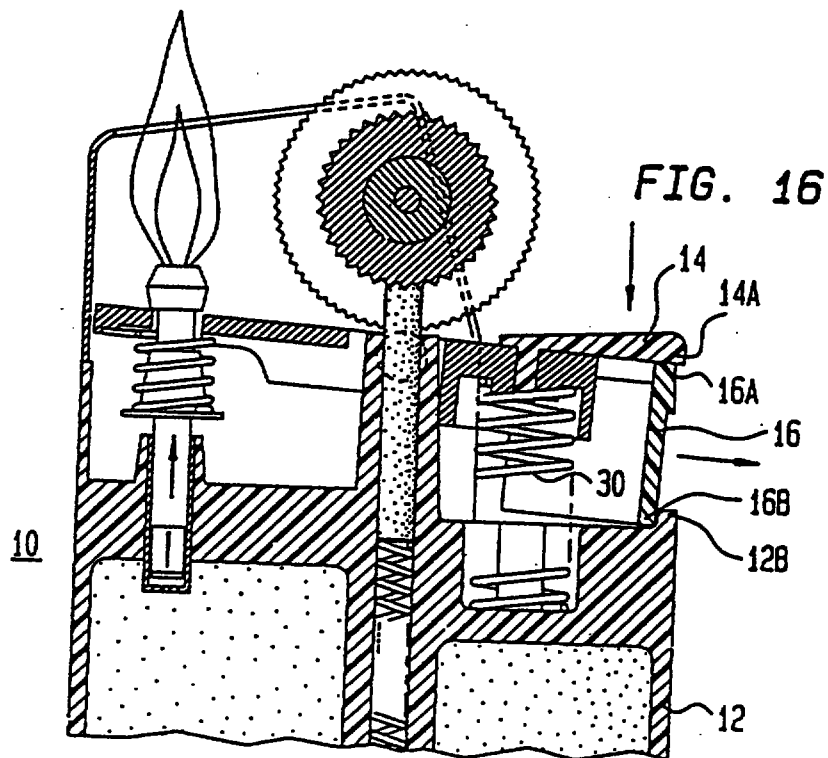

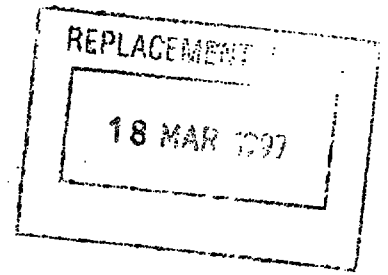

2-537063E

96066675

REPLACEMENT SHEET

24 AUG 1998

- 1 -

SELECTIVELY ACTUATABLE LIGHTER

REPLACEMENT SHEET

BACKGROUND OF THE INVENTIONCross-Reference to Related Applications

This is a continuation-in-part of U.S. Patent Application Serial No. 07/723,989 filed on July 1, 1991, entitled "Selectively Actuatable Lighter", which is a continuation-in-part of U.S. Patent Application Serial No. 07/609,668 filed on November 6, 1990, entitled "Selectively Actuatable Lighter", abandoned, which is a continuation of Serial No. 07/239,734 filed on September 2, 1988, entitled "Selectively Actuatable Lighter", which issued on March 26, 1991 as U.S. Patent No. 5,002,482. This is also a continuation-in-part of U.S. Patent Application Serial No. 07/912,421, filed on July 10, 1992, entitled "Selectively Actuatable Lighter", which is a continuation of U.S. Patent Application Serial No. 07/609,668. Each of these four patent applications is incorporated herein by reference.

This application is also related to U.S. Patent No. 5,125,829, entitled "Bidirectional Selectively Actuatable Lighter" which issued on June 30, 1992, and U.S. Patent No. 5,092,764, entitled "Selectively Actuatable Lighter With Locking Value Cap" which issued on March 3, 1992. This application is also related to U.S. Patent Applications Serial Nos. 07/965,958, 07/965,596 and 07/965,831, each entitled "Selectively Actuatable Lighter" and each filed concurrently herewith. Each of these two patents and three patent applications is incorporated herein by reference.



THE CLAIMS

REPLACEMENT SHEET

24 AUG 1998

REPLACEMENT SHEET

1. A lighter comprising:

a housing defining a fuel reservoir;

valve means for releasing fuel from said fuel reservoir;


means for igniting the released fuel;

actuator means operatively engaged with said valve means such that fuel is released when said actuator means is depressed along a longitudinal axis of said housing;

interference means for preventing the movement of said actuator means along the longitudinal axis of said housing when in a closed position, said interference means being selectively movable inward towards the longitudinal axis to an open position out of interference with said actuator means, thereby allowing said actuator means to be depressed, and said interference means including an extending, resiliently deformable portion cooperating with a mating element for securing the interference means in the open position wherein said deformable portion is in a relaxed and undeformed condition in the open position, said portion being deformed by the mating element as the interference means is moved inward and returning to the undeformed condition and being under no loading when in said closed position; and

camming means operatively engaging said interference means when said actuator means is depressed for moving said interference means outward away from said longitudinal axis into the closed position, said deformable portion being deformed by the mating element during such outward movement.

2. The lighter according to claim 1 wherein said actuator means includes protrusion means on either side thereof forming said mating element, and said interference means includes corresponding indentation means formed on said resiliently deformable portion for mating with said protrusion means, said interference means normally retained in said closed position by resiliently interfering with said actuator means.

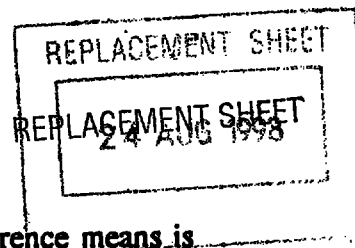

3. The lighter according to claim 2 wherein said interference means is retained in said open position by said protrusion means resiliently mating with said indentation means.
4. The lighter according to claim 3 wherein said interference means is a latch having an interfering portion which is movable inward towards the longitudinal axis of said housing into alignment with a cavity in said housing.
5. The lighter according to claim 4 wherein said latch is slideably mounted to said valve actuator.
6. The lighter according to claim 3 wherein said means for igniting comprises flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.
7. The lighter according to claim 3 wherein said means for igniting comprises electric spark-producing means.
8. The lighter according to claim 3 wherein said means for igniting comprises piezoelectric spark-producing means.
9. The lighter according to claim 1 wherein said interference means is movable along only a single path from said closed position to said open position.
10. A lighter normally maintained in a latched configuration comprising:
 - a housing having a longitudinal axis;
 - fuel supply means for supplying fuel;
 - ignition means for igniting said fuel;
 - valve means for controlling the flow of said fuel;
 - a valve actuator operatively engaged with said valve means, said valve actuator preventing the flow of said fuel when in a first position, said valve actuator



24 AUG 1998

being depressible along said longitudinal axis into a second position to permit the flow of fuel;

a latch member separate from the valve actuator and positioned at least partially beneath said valve actuator in a first position normally preventing said valve actuator from being depressed into said second position by interfering with the movement thereof along the longitudinal axis of said housing,

wherein inward movement of said latch towards the longitudinal axis of said housing enables an interfering portion of said latch to become aligned with a cavity in said housing, and places said lighter in an unlatched configuration, said cavity being sufficient in size to accommodate said interfering portion so as to enable said valve actuator to be depressed; and


camming means, comprising an upright surface of the lighter housing disposed to interfere with the latch member in the unlatched configuration when the valve actuator is depressed, for forcing said latch outward away from said longitudinal axis into its first position and the lighter out of its unlatched configuration when said valve actuator is depressed, moving said latch downward along a direction parallel to the longitudinal axis and into contact with said upright surface.

11. The lighter according to claim 10 wherein said ignition means comprises a spark-producing wheel and a flint urged against said wheel and wherein sparks are produced by rotation of said wheel.

12. The lighter according to claim 10 wherein said ignition means comprises electric spark-producing means.

13. The lighter according to claim 10 wherein said ignition means comprises piezoelectric spark-producing means.

14. The lighter according to claim 10 wherein said latch is constrained to move along only a single path when said lighter is configured from said latched configuration to said unlatched configuration.

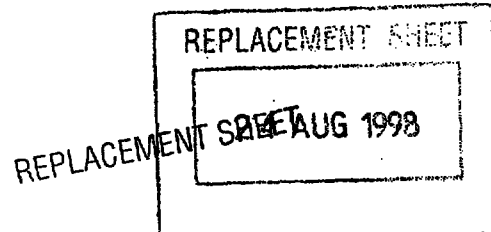

15. The lighter according to claim 10 wherein said lighter is maintained in each of said latched and unlatched configurations by the interaction between said latch and said valve actuator.
16. The lighter according to claim 10 wherein said latch is slideably attached to said valve actuator between said latched and unlatched configurations.
17. The lighter according to claim 16 wherein said latch is under no loading in each of said latched and said unlatched configuration.
18. The lighter according to claim 10 wherein said latch comprises a portion normally positioned between at least a portion of said valve actuator and at least a portion of said housing.
19. The lighter according to claim 10 wherein said unlatched configuration is maintained until said valve actuator is depressed and released.
20. A lighter comprising:
a housing having a fuel compartment;
fuel release means for releasing fuel from said fuel compartment;
means for igniting said released fuel;
a thumb-depressible actuator operatively engaged with said release means such that when depressed along a longitudinal axis of said housing fuel is released, said actuator having protrusions on either sides thereof;
a U-shaped latch disposed between said actuator and a portion of said housing for preventing said actuator from being depressed by abutting at least a portion of said housing, said latch having indentations on either sides thereof, said latch being selectively movable inward towards the longitudinal axis of said housing such that said protrusions engage and mate with said indentations thereby holding said latch inward,



-44-

REPLACEMENT SHEET

REPLACEMENT SHEET

24 AUG 1998

wherein said movement inward produces a void between said latch and said housing, said void sufficient in size to allow said actuator to be depressed so as to allow fuel to be released from said fuel compartment; and

camming means operatively engaged with said latch when said latch is in its inward position and when said actuator is depressed for disengaging said protrusions from said indentations thereby allowing said latch to move outward away from the longitudinal axis of said housing.

21. The lighter according to claim 18 wherein said latch is slideably attached to said actuator.

22. The lighter according to claim 18 wherein said means for igniting includes flint material and a rotatable spark-producing wheel having a toothed surface positioned and arranged to selectively frictionally contact said flint material.

23. The lighter of claim 18 wherein said means for igniting includes electric spark-producing means.

24. The lighter of claim 18 wherein said means for igniting includes piezoelectric spark-producing means.

24 AUG 1998

- 45 -

SELECTIVELY ACTUATABLE LIGHTER REPLACEMENT SHEET

ABSTRACT

A selectively actuatable lighter device (10) is disclosed which includes a body defining reservoir (12) for containing a combustible gaseous medium such as butane, and having a valve (20) arranged to be selectively actuated between a normally closed position and an open position which permits the exit of the gaseous medium. Such lighter (10) can selectively produce sparks at a location (19,22) proximate to the gaseous medium exit to ignite the gaseous medium. Such lighter device (10) embodies a resiliently releasable valve actuator (14) which normally prevents actuation of the valve (22). The valve actuator (14) includes an interfering portion (14A) which is selectively movable to a position out of interference with an interfering portion (12B) of the lighter body, so that the gaseous medium may be released and ignited by the sparks. Once the valve actuator (14) is depressed and released, it returns to its closed or latched position to prevent actuation of the valve to the open position. To "re-use" the lighter, the valve actuator (14) must again be moved to an unlatched position so that the valve (22) can be actuated for subsequent ignition of the gaseous medium.

FIGURE 14