

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number
WO 02/053925 A3

(51) International Patent Classification⁷: **F16B 37/06**

(21) International Application Number: PCT/JP01/11629

(22) International Filing Date:
28 December 2001 (28.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2000-400974 28 December 2000 (28.12.2000) JP

(71) Applicant (for all designated States except US): **EBARA CORPORATION** [JP/JP]; 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MIYAZAKI,**

Yoshiaki [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **UCHIDA, Hiroshi** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **KAJIWARA, Kenichi** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **MORI, Kikuichi** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP). **MORITA, Chitoshi** [JP/JP]; c/o Ebara Corporation, 11-1, Haneda Asahi-cho, Ohta-ku, Tokyo 144-8510 (JP).


(74) Agents: **WATANABE, Isamu** et al.; GOWA Nishi-Shinjuku 4F, 5-8, Nishi-Shinjuku 7-chome, Shinjuku-ku, Tokyo 160-0023 (JP).

(81) Designated States (national): CN, SG, US.

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

[Continued on next page]

(54) Title: FASTENER AND FASTENING METHOD

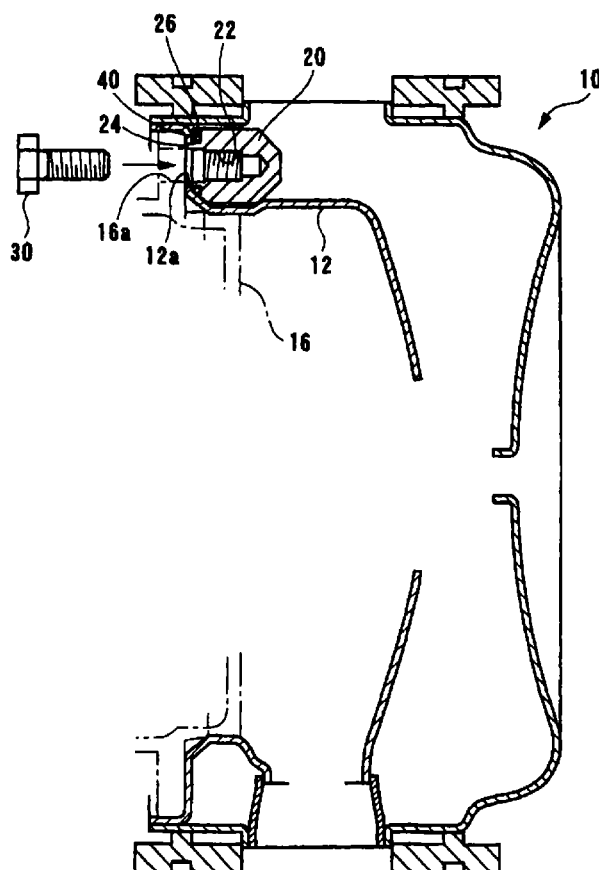

(57) Abstract: The present invention relates to a fastener and a fastening method for joining together two or more members including at least one complicate-shaped plate. A fastener comprises a cap nut (20) having a main body and a thin-walled portion (24) projecting from the main body, and a bolt (30) screwed into the cap nut (20). The cap nut (20) is fixed to a plate-like member (12) by inserting the thin-walled portion (24) into a through-hole (12a) of the plate-like member (12) and caulking the thin-walled portion (24).



G00002

WO 02/053925 A3

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

10 October 2002