

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/19490 A1


- (51) International Patent Classification⁷: B01D 29/01, 29/58, 29/90 (74) Agent: HUBBARD, John, Dana; Millipore Corporation, 80 Ashby Road, Bedford, MA 01730 (US).
- (21) International Application Number: PCT/US00/24976 (81) Designated States (national): JP, KR, SG.
- (22) International Filing Date: 13 September 2000 (13.09.2000) (84) Designated States (regional): European patent (DE, ES, FR, GB, IT, NL).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/154,589 17 September 1999 (17.09.1999) US
- (71) Applicant: MILLIPORE CORPORATION [US/US]; Hubbard, John, Dana, 80 Ashby Road, Bedford, MA 01730 (US).
- (72) Inventors: STANKOWSKI, Ralph; 18 Boutwell Hill Road, Westford, MA 01886 (US). HUNT, Stephen; 6 Salem Road, North Billerica, MA 01862 (US).

Published:

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PROCESS AND FILTER FOR FILTERING A SLURRY

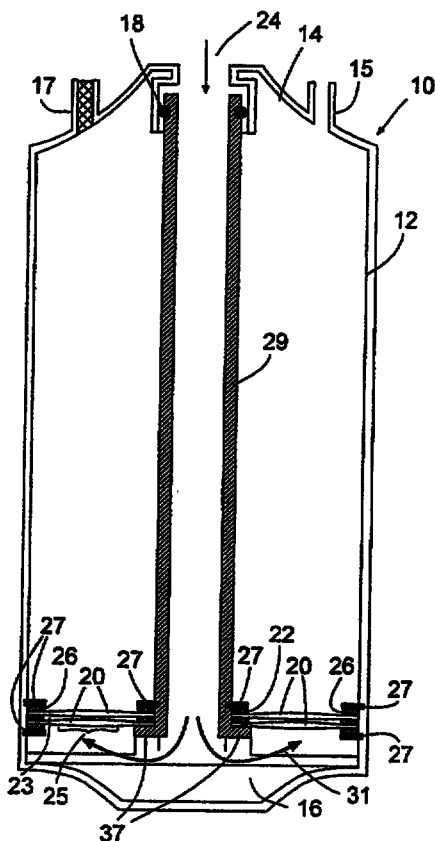

(57) Abstract: The present invention comprises a process for filtering a slurry and a filter cartridge construction for filtering a slurry having a filtration medium formed of a depth filter such as a cylindrical seamless fibrous depth filter comprising a nonwoven fibrous mass, woven fibers, a plurality of nonwoven fibrous layers or a fibrous felt or the like or a wound depth filter retained within a housing substantially free of an open void volume upstream of the depth filter which causes separation of solid particles from a slurry being filtered. The filtration medium is divided into a plurality of depth filter segments by spacers which are spaced apart from each other along the length of a filter cartridge housing which houses the depth filter. The spacers serve to divide the depth filter medium into depth filter segments and to allow fluid to pass therethrough along a defined path defined by the configuration of the open portions of the spacers. In addition the spacers are configured to seal the inner surfaces of the filter cartridge housing to prevent channelling of the slurry being filtered along the inner surfaces of the housing. By utilising the spacers, the compressibility of the filtration medium also is substantially reduced.

WO 01/19490 A1