This Sheet Has Been Replaced



97034a2-0
IPOS

Device for reading from or writing to an optical recording medium

The present invention relates to a device for reading from and/or writing to an optical recording medium which has at least two information carrier layers spaced apart from one another, according to the preamble of Claim 1.

A device of this type is disclosed in US-A-4,908,813. What is disadvantageous in the case of this known device is that the optical recording medium is provided with layers sensitive to different wavelengths, which consequently makes it necessary to provide the recording device with a plurality of lasers of different wavelength. Depending on the wavelength, these lasers are relatively complicated and cost-intensive.

The object of the present invention is to propose a device for reading from and/or writing to optical recording media having a plurality of information carrier layers spaced apart from one another which permits a plurality of information carrier layers to be read out and/or written to simultaneously using light of a single wavelength.

This object is achieved by means of the features specified in the characterizing part of Claim 1. This has the advantage that simultaneous reading from or writing to or simultaneous reading from and writing to the optical recording medium is made possible using light of a single wavelength. The different propagation behaviour enables the two partial beams to be focused onto two different information carrier layers by means of a simple optical unit; the different polarization enables simple separation of the partial beams in the detection unit. The device according to the invention may be suitable both for reading from or writing to and for reading from and writing to an optical recording medium. The optical recording medium may be in the form of a disk, such as, for example, a CD or a DVD, but a recording medium in the form of a tape or a recording medium in another form with

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



two information carrier layers lying one above the other and spaced apart from one another is also within the scope of the invention. The light source serves to generate a light beam used to read from or write to the optical recording medium. The said light beam is generally reflected from the optical recording medium, but the use of translucent recording media is likewise within the scope of the invention. The optical unit serves to focus the light beam generated by the light source onto the optical recording medium and to direct the reflected or transmitted light beam onto the detection unit. The latter serves to detect the light coming from the optical recording medium and to forward for example electrical signals, on the one hand for obtaining the information stored on the information carrier layer and on the other hand for obtaining parameters which are necessary or useful for the operation of the device, for example a tracking signal. The partial beam generating element is advantageously a birefringent element which can be introduced into a convergent beam or into a divergent beam.

The invention provides for the partial beam generating element to be a birefringent lens. This has the advantage that no additional element is required in the optical unit, since the latter contains lenses in any case. A further advantage may be seen in the fact that a lens composed of birefringent material separates an incident light beam into two partial beams which, on the one hand, are polarized perpendicularly to one another and, on the other hand, are divergent or convergent to different extents, depending on the type of lens and its arrangement.

The invention provides for a polarization direction-rotating element to be arranged in the beam path upstream of the partial beam generating element. This has the advantage that a variable distribution of the light intensity between the two partial beams is achieved by rotating the polarization direction of the incident light. This is advantageous if it is necessary

REPLACED

This Sheet Has Been Replaced



to match the intensities of the partial beams to what may be different reflectivities of the information carrier layers. Moreover, the solution is advantageous when recording information items onto one of the information carrier layers. In this case, a higher light power is generally required for the partial beam with which it is intended to effect recording, while the power of the other partial beam, with which it is not intended to effect recording, may be very low. A further advantageous application of this inventive idea resides in the possibility of allocating 100% of the available light intensity to the respective partial beam for the purpose of reading out either one or the other information carrier layer. This is practical for various applications, for example when it is intended to operate with a reduced power of the light source or for the purpose of achieving noise suppression by masking out the respective other information carrier layer, or in other suitable applications. All these different divisions of the intensity between the individual partial beams make it possible to use a cost-effective light source of relatively low power, which, moreover, does not need to be variable in its power output. The polarization direction-rotating element is advantageously a rotatable pole filter. It may likewise be advantageous to arrange the light source, which is in particular a semiconductor laser, such that it is rotatable, or to rotate the polarization direction of the light, for example from a semiconductor laser, by means of a $\lambda/2$ plate, a Kerr cell or in another suitable manner.

According to another advantageous refinement of the present invention, the partial beam generating element comprises an arrangement of two light sources which emit polarized light and are situated at different distances from the optical unit. This has the advantage that a birefringent partial beam generating element is unnecessary. The light sources are preferably lasers, for example semiconductor laser diodes, which emit linearly polarized light. The light is coupled in, for example, by

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



means of a semi-transparent mirror or a polarizing beam splitter.

These light sources are advantageously integrated on a single carrier element. This has the advantage that the carrier element is supplied in a manner adjusted to the assembly of the device, with the result that no adjustment is necessary during assembly of the device. It is particularly advantageous if the carrier element is an integrated semiconductor component. A device of this type can be produced such that it is already correctly adjusted.

According to the invention, the detection unit, that is to say the detection path of the device, has a birefringent prism-type beam splitter. This has the advantage of requiring less physical space, since the sensors for the two partial beams can be arranged in one plane. A birefringent prism-type beam splitter has different path lengths for the various polarization directions and consequently makes it possible to transfer the focal points of the two partial beams, which focal points are situated one behind the other in the optical axis of the propagation direction of the beam, into two focal points lying next to one another in a single focal plane perpendicular to the said optical axis.

The detection unit advantageously has a detector plane in which a plurality of detector elements are arranged. This has the advantage that the detector elements all lie in one plane and can therefore be produced cost-effectively as one component. Furthermore, it is not necessary to adjust the individual detector elements when they are being installed in the device.

The invention provides for the detection unit to have a polarization direction-dependent semi-transparent mirror. This has the advantage that the latter can be realized in a cost-effective and space-saving manner, for example as a polarizing beam splitter cube. It serves to divide the partial beams coming from the optical recording medium between the various detector elements.

THIS SHEET HAS BEEN REPLACED

The present invention furthermore relates to an optical recording medium, in particular for use in a device according to the invention, which has the features specified in Claim 9, namely that the optical recording medium has an information carrier layer having prerecorded information items as well as an information carrier layer which is spatially separate and spaced apart from the former layer, is suitable for recording information items and has no prerecorded information items. This has the advantage that the said prerecorded information items, which are necessary or at least useful for reading from and/or writing to the optical recording medium, do not have to be prerecorded twice, that is to say on each of the information carrier layers, since both information carrier layers can be read from and/or written to simultaneously by the corresponding device. This enables an increase in the memory space available for useful data recording, a reduction in the manufacturing costs of the optical recording medium, an increase in the signal-to-noise ratio and, in particular, enables the recorded information items on both information carrier layers to lie exactly one above the other, since the device, during the recording of both layers, in each case refers to the information items prerecorded in one layer. Useful data is a term encompassing video, audio and other useful data as well as pure data. The optical recording medium can, of course, also have a plurality of information carrier layers, at least one of which has prerecorded information items which are not prerecorded on the other layer or layers.

The present invention not only relates to the expressly mentioned exemplary embodiments and explanations, but also includes all configurations lying within the scope of the invention.

Further advantageous features and refinements of the invention can be found in the following description with reference to the figures, in which

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced

Figure 1 shows a device according to the invention with a birefringent prism-type beam splitter,

Figures 2 shows the detection path of a device according to the invention with a polarization direction-dependent semitransparent mirror,

Figure 3 shows part of a device according to the invention with a polarization direction-rotating element in a three-dimensional illustration,

Figure 4 shows part of a device according to the invention with two light sources in a first embodiment,

Figure 5 shows part of a device according to the invention with two light sources in a second embodiment,

Figure 6 shows a detector unit of a device according to the invention, and

Figure 7 shows a detail of an optical recording medium according to the invention.

Figure 1 shows a device according to the invention with a birefringent prism-type beam splitter. A laser diode 1 which emits a linearly polarized light beam 2 serves as light source. This light beam passes through a phase grating 3, which produces +/- first-order secondary beam [sic] required for tracking according to the known three-beam method. This method is discussed only to the extent required to describe the exemplary embodiment. It goes without saying that the invention can also be advantageously used with other tracking methods. After passing through the phase grating 3, the light beam 2 falls onto a birefringent collimator lens 4, which represents the partial beam generating element in the exemplary embodiment. The birefringent collimator lens 4 splits the light beam 2 into two partial beams 5 and 6 which are polarized perpendicularly to one another. The partial beams 5 and 6 pass through a non-polarizing beam splitter 7 and are focused by an objective lens 8 onto different information carrier layers 9 and 10 of the optical recording medium, which is indicated only

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



diagrammatically here. For the purpose of focusing, the objective lens 8 can be displaced in the direction of the optical axis, in the left/right direction in Figure 1. For the purpose of tracking along the tracks in which the information items are stored on the information carrier layers 9, 10, the objective lens 8 can be moved parallel to the information carrier layers 9, 10. This is done by a lens drive 11, which is indicated only diagrammatically here by means of double arrows in the respective direction of movement. In order to illustrate the polarization direction of the partial beams 5 and 6, the polarization directions are represented symbolically on the information carrier layers 9 and 10. The partial beam 5 incident on the information carrier layer 9 is, accordingly, polarized in the direction of the plane of the drawing, while the partial beam 6 incident on the information carrier layer 10 is polarized perpendicularly with respect thereto. The partial beams 5, 6 are reflected by the information carrier layers 9, 10, pass through the objective lens 8 and are deflected downwards in the figure, in the non-polarizing beam splitter 7, and reach a focusing lens 12. They subsequently pass through a cylindrical lens 13, which is used to carry out the astigmatism autofocus method, which is not discussed here in any detail. They subsequently impinge on the polarizing prism-type beam splitter 14. The latter has two reflective layers 15 and 16, which each reflect light of one polarization direction. The partial beam 5, which is polarized in the direction of the plane of the drawing, passes through the layer 16, which is reflective for the other polarization direction, and is reflected by the reflective layer 15 onto a sensor S1 of the detector arrangement 17. The partial beam 6, which is polarized perpendicularly to the plane of the drawing, is reflected by the reflective layer 16 onto the sensor S2 of the detector arrangement 17.

According to the invention, the polarization of the light along the optical axis of the device is utilized to produce two mutually separate focal points on

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



the information carrier layers 9 and 10. The focal points, which are separated in the longitudinal direction, are produced with the aid of the birefringent collimator lens 4. This facilitates, in the detection path, the separation of the signals originating from the different information carrier layers 9, 10, by using a polarization-sensitive optical arrangement, the polarizing prism-type beam splitter 14 in the exemplary embodiment. According to the invention, it is likewise possible to design the objective lens 8 as a birefringent lens. In this case, the separation in the detection path cannot be realized as easily as in the manner illustrated in Figure 1. A recommended birefringent material for the collimator lens 4 is quartz, for example, whose refractive indices $n_e = 1.5533$ and $n_o = 1.5442$ at a wavelength of about $\lambda \approx 700$ nm, the wavelength region usually used for corresponding devices, enables [sic] focal point separation which is sufficient for the usual dimensions of the write/read head.

The reflective layers 15, 16 of the polarizing prism-type beam splitter 14 are arranged parallel to one another at a distance d. By suitable selection of the distance d, an optical path length is inserted which enables the two focal points, which impinge on the information carrier layers 9 and 10 spaced apart from one another, to be imaged on the detector arrangement 17 in one plane. Assuming that the focal length of the focusing lens 12 is 42 mm and that of the objective lens 8 is 3.5 mm, the resulting magnification factor is $\eta = 12$, which, assuming that the distance between the information carrier layers 9, 10 is $\delta = 70$ nm, results in a required thickness d of

$$d = \frac{\eta * \delta}{2\sqrt{2}} \approx 0.3 \text{ mm}$$

Figure 2 illustrates the detection path of a device according to the invention, that is to say the region of Figure 1 which is represented below the

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



cylindrical lens 13. After passing through the cylindrical lens 13, the partial beams 5 and 6 coming from the optical recording medium impinge on a polarizing beam splitter cube 18, which has a reflective layer 16'. The partial beam 5, which is polarized in the plane of the drawing, passes through this reflective layer 16' and impinges on a sensor S1'. The partial beam 6, which is polarized perpendicularly with respect thereto, is reflected by the reflective layer 16 and directed onto the sensor S2'. The two sensors S1' and S2' are adjusted with respect to one another in the detection unit. In this exemplary embodiment, it is possible to dispense with a polarizing prism-type beam splitter having reflective layers arranged at a distance d.

Figure 3 shows part of a device according to the invention with a polarization direction-rotating element 20 in a three-dimensional illustration. The laser diode 1 and the light beam 2 emitted by it can be discerned. The polarization direction is specified by the indication of the polarization vector E_L of the polarization direction-rotating element 20. In the birefringent collimator lens 4, the polarization direction for the ordinary beam is indicated by n_o and the polarization direction for the extraordinary beam is indicated by n_e. The corresponding partial beams 5 and 6 are indicated in the further beam path. In the illustration represented, the polarization vector E_L is shown having been rotated through 45° with respect to the preferred directions of the birefringent collimator lens 4 which are indicated by the arrows n_o and n_e. By rotating the polarization E_L of the light beam 2 with respect to the crystal axes n_o and n_e of the collimator lens 4, the intensity of the two collimated, polarized partial beams 5, 6 can be adjusted in a continuously variable manner. The two intensities have the same magnitude at an angle of 45°. Particularly for writing to a writable information carrier layer 9 and/or 10, it is practical to increase the intensity of the partial beam 5 and/or 6 used for writing in comparison

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



with the respective other partial beams 6 and/or 5, for example in the ratio 80:20.

Figure 4 shows part of a device according to the invention with two light sources in a first embodiment. Two separate laser diodes 1′ and 1′′, which have a small lateral offset as well as an offset in the longitudinal direction, that is to say in the beam propagation direction, are provided in this case. This is illustrated in a greatly exaggerated manner in Figure 4. Furthermore, the laser diodes 1′ and 1′′ are aligned in such a way that the light beams 2′ and 2′′ generated by them are polarized perpendicularly to one another. A conventional collimator lens 4′ is used in this case. The further beam path corresponds to that described in relation to Figure 1 and in relation to Figure 2. With a suitable lateral offset, it may be possible to achieve greater splitting of the partial beams in the region of the detector arrangement 17, with the result that it is possible to provide a less elaborate solution in this case.

Figure 5 represents a second embodiment of a device according to the invention with two light sources. In this case, too, use is made of two separate laser diodes 1′, 1′′, whose light beams 2′, 2′′ are combined by means of a semi-transparent reflective film 19 and are directed onto a conventional collimator lens 4′. The distance x_1 between the laser diode 1′ and the semi-transparent reflective film 19 and the distance x_2 between the laser diode 1′′ and the semi-transparent reflective film 19 are selected to be different, thereby producing longitudinally displaced focal points for the two light beams 2′ and 2′′, corresponding to the distance between the information carrier layers 9 and 10. The advantage of this embodiment over that described in Figure 4 resides in the fact that the light beams 2′ and 2′′ are not laterally offset with respect to one another, since both laser diodes 1′ and 1′′ can be arranged exactly in the optical axis. In this case, too, the further beam path corresponds to that described in relation to Figure 1 and Figure 2.

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



Figure 6 represents the detector arrangement 17 of a device according to the invention. The sensors S_1 and S_2 on which partial beams 5 and 6, respectively, are imaged can be discerned. In the exemplary embodiment, the sensor S_1 is divided into four quadrants consisting of the detector elements A, B, C, D. This division makes it possible to form a focusing signal FE in accordance with the astigmatism focus method. This is illustrated in the right-hand part of Figure 6. FE results from the difference between the respective sum of two diagonally arranged detector elements: FE = (A + C) - (B + D). Further detector elements E and F serve to obtain a tracking signal TE in accordance with the three-beam method. The light beam 2 is split by the phase grating 3 into a zeroth-order primary beam and two +/- first-order secondary beams, which is not illustrated in the previous figures for the sake of simplicity. In Figure 6, the light spots originating from these beams are indicated in each case as a circular spot on the detector elements. The zeroth-order primary beam falls onto the central area of the sensor S_1 and of the sensor S_2, while the +/- first-order secondary beams of the partial beam 5 fall onto the detector elements E and F. Since no detector elements are provided for the +/- first-order secondary beams of the partial beam 6, the corresponding light spots are indicated by dashed lines. The tracking signal TE results from the difference between the signals emitted by the detector elements E and F. The partial beam 6 falls onto the sensor S2, which consists of a single detector element G. The information signal of the partial beam 6 consequently corresponds to the output signal of the detector element G, and the information signal of the partial beam 5 corresponds to the sum of the output signals of the detector elements A to D. This is likewise indicated in the right-part of Figure 6. The imaging, described here, of the two focal points, that on the information carrier layer 9 and that on the information carrier layer 10, onto a single detector arrangement 17 is possible due to the use of the

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



polarizing prism-type beam splitter 14. It goes without saying that corresponding detector elements to those in the region of the sensor 1 can also be arranged in the region of the sensor 2, if appropriate, in order to improve focusing and tracking. Furthermore, it is possible to use other focusing and tracking methods, the detector arrangement 17 having to be constructed in accordance with these methods.

Figure 7 illustrates a detail of an optical recording medium according to the invention in the region of the information carrier layers 9 and 10. The arrangement of two information carrier layers makes it possible to accommodate about double the volume of data on the optical recording medium. A further increase in the storage capacity is produced if further information carrier layers are arranged correspondingly. With the multiple-focus optical arrangement according to the invention, two of these information carrier layers can be read out simultaneously, since the distance between the focal points of the partial beams 5 and 6 corresponds ΔZ to the distance [sic] between the two information carrier layers 9 and 10. The information tracks of the information carrier layers 9 and 10 in this case lie one above the other, with the result that not only are both partial beams 5 and 6 focused simultaneously on a respective information carrier layer, but they can also simultaneously read usable information items there. The information carrier layer 10 is semi-transparently reflective, with the result that the partial beam 5 can pass through it. An interesting application of the present invention is when the optical recording medium is a so-called ROM/RAM disk. In this case, for example, the information carrier layer 9 is a ROM layer. That is to say it contains only read information items in a pre-embossed information track. The information carrier layer 10 is designed as a storage layer. This may be a phase change layer, a photorefractive layer, a magneto-optical layer or any other layer suitable for recording. However, the information carrier layer 10 is constructed without a

THIS SHEET HAS BEEN REPLACED

leader track which is usually present in the case of recording layers. An optical recording medium of this type is read from and written to using a double-focus system, i.e. the device according to the invention as explained above, for example. This has the advantage that the information track and/or a leader track of the information carrier layer 9 can be used for focusing, tracking, disk control and the addressing of the areas of the information carrier layers 9, 10. During the writing operation in the information carrier layer 10, a data track is automatically written in exactly above the track of the information carrier layer 9. Since the information carrier layer is a planar, uniform area without a leader track or additional addressing information items, the signal-to-noise ratio that can be achieved is higher, since an additional noise signal due to any roughness of the edges of a leader track or from addressing bits are [sic] not produced. Moreover, the entire storage capacity of the information carrier layer can be utilized for data storage, since it is not necessary for any address or servo information items, such as, for example, for tracking, to be located on the information carrier layer 10. Using the method, described in relation to Figure 3, for rotating the polarization direction with respect to the crystal axis of the birefringent collimator lens 4, it is possible correspondingly to adjust the light intensity for writing on the information carrier layer 10. For example, the intensity of the partial beam 5 reading on the information carrier layer 9 may be about 10% of the total power of the laser diode 1, and the intensity of the partial beam 6 used for writing on the information carrier layer 10 may accordingly be about 90% of the said power.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

Patent Claims

1. Device for reading from or writing to an optical recording medium which has at least two information carrier layers (9, 10) spaced apart from one another, having a light source (1, 1', 1''), an optical unit and a detection unit, characterized in that a partial beam generating element (4, 1', 1'', 19) is present, which emits two partial beams (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour, thus having a focal point on both layers (9, 10) simultaeneously.

2. Device according to Claim 1, characterized in that the partial beam generating element is a birefringent lens (4).

3. Device according to either of Claims 1 and 2, characterized in that a polarization direction-rotating element (20) is arranged in the beam path upstream of the partial beam generating element (4).

4. Device according to Claim 1, characterized in that the partial beam generating element is an arrangement of two light sources (1', 1'') which emit polarized light and are at different distances from the optical unit.

5. Device according to Claim 4, characterized in that the light sources 1', 1'') are integrated on a single carrier element.

6. Device according to one of Claims 1 to 5, characterized in that the detection unit has a birefringent prism-type beam splitter (14).

7. Device according to Claim 6, characterized in that the detection unit has a detector arrangement (17), in which a plurality of detector elements (A, B, C, D, E, F, G) are arranged in one plane.

8. Device according to one of Claims 1 to 5, characterized in that the detection unit has a polarization direction-dependent semi-transparent mirror (16').

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

9. Optical recording medium particularly for use in a device according to one of the preceding claims, characterized in that the optical recording medium has an information carrier layer (9) with prerecorded information items, as well as an information carrier layer (10) which is spatially separate and spaced apart from the former layer, is suitable for recording information items and has no corresponding prerecorded information items.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

Abstract

The present invention relates to a device for reading from or writing to an optical recording medium which has at least two information carrier layers (9, 10) spaced apart from one another, as well as a light source (1, 1', 1''), an optical unit and a detection unit. The object of the present invention is to propose a device of this type which permits a plurality of information carrier layers to be read from and/or written to simultaneously using light of a single wavelength. According to the invention, a partial beam generating element (4, 1', 1'', 19) is present for this purpose, which element emits two partial beams (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour.

The present invention is advantageously employed in devices for reading from or writing to optical recording media such as, for example, CD, CD-ROM, DVD, laser disk or the like.

Figure 1

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

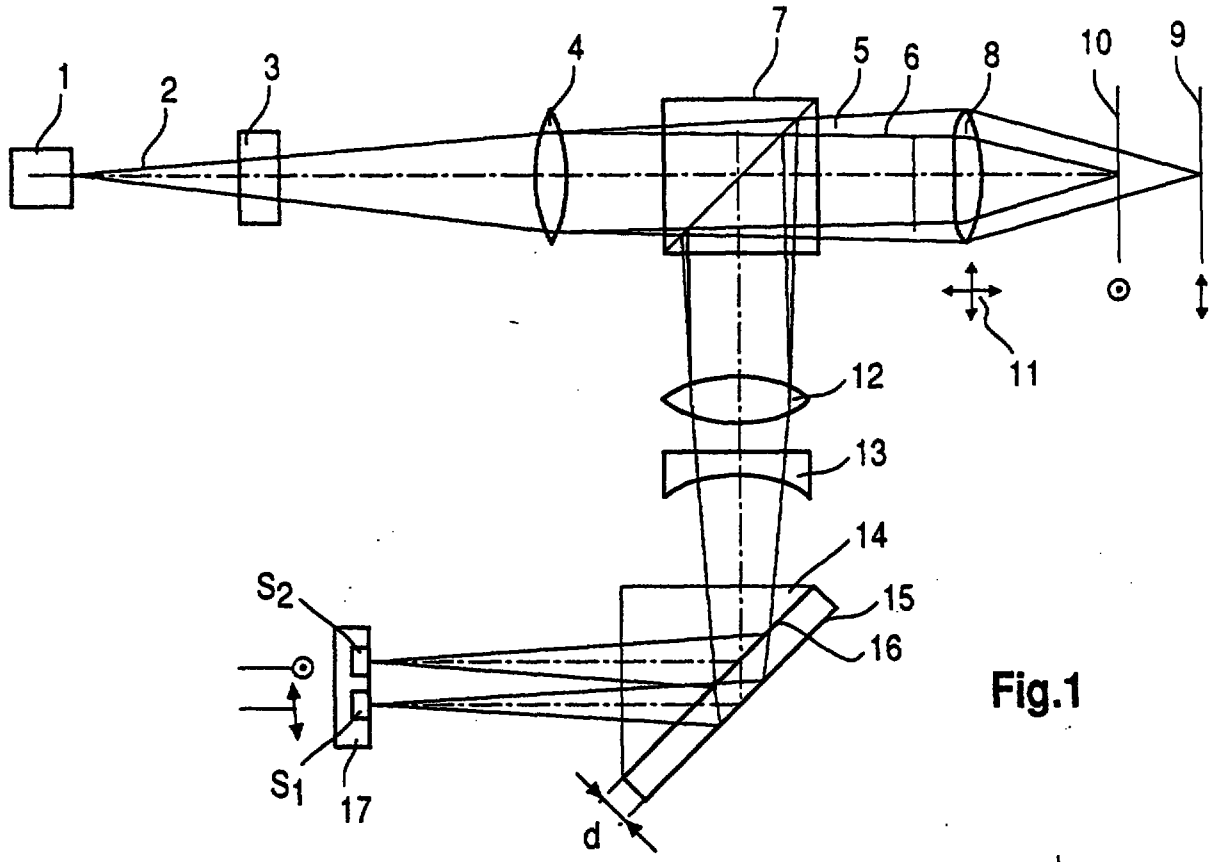


Fig.1

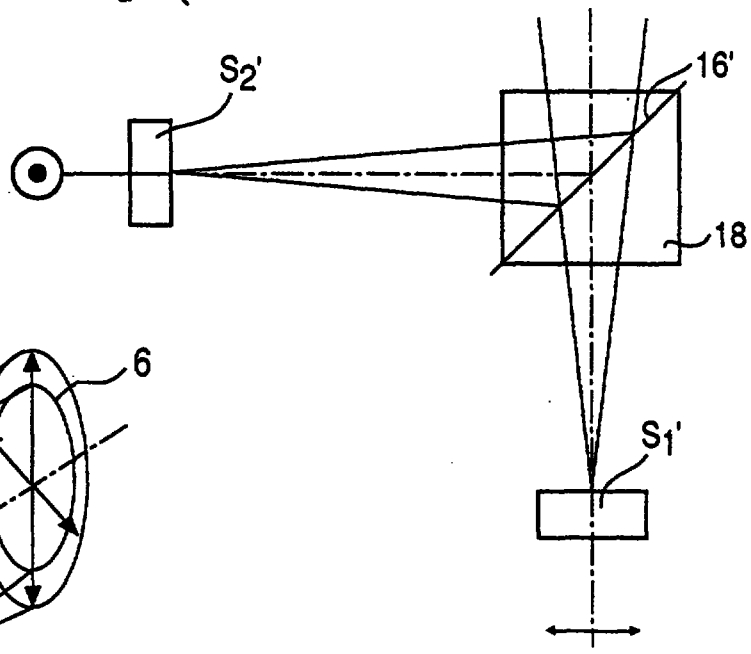


Fig.2


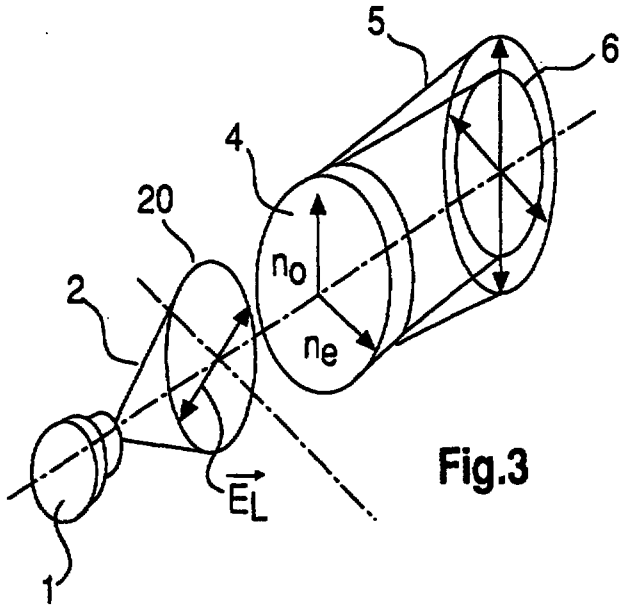


Fig.3

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced

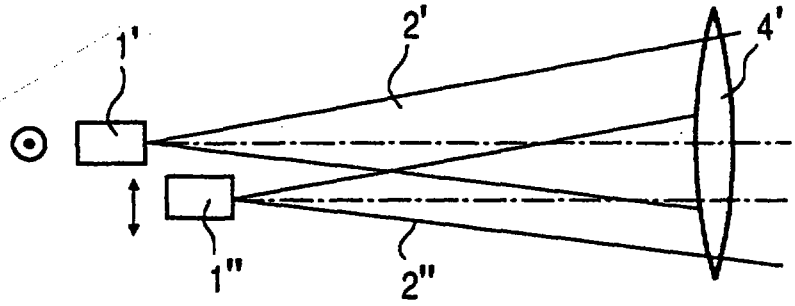


Fig.4

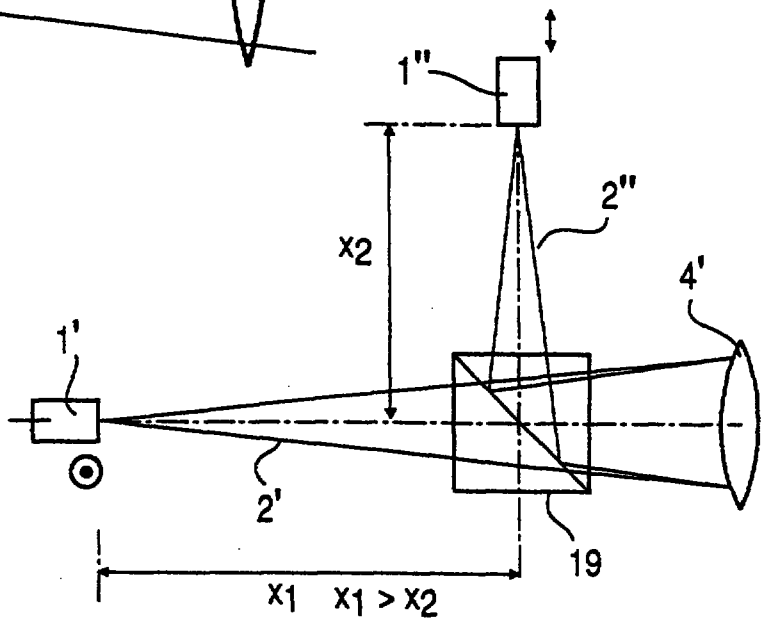
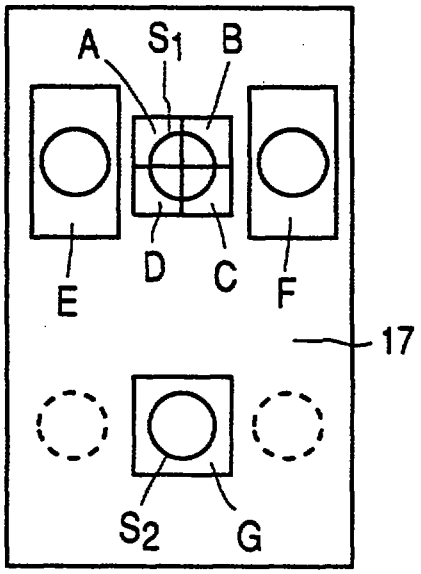


Fig.5



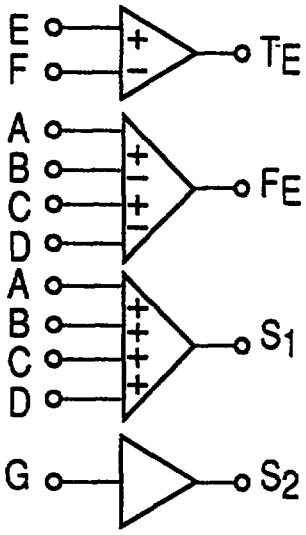


Fig.6

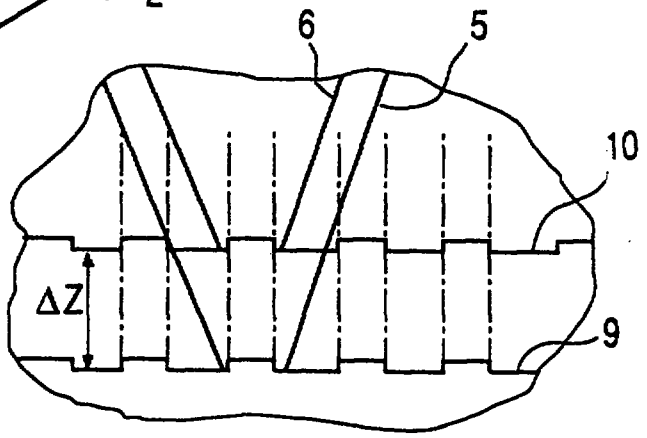


Fig.7

THIS SHEET HAS BEEN REPLACED

9703492-0
IPOS
REPLACEMENT SHEET
05 DEC 1997

Device for reading from or writing to an optical recording medium

The present invention relates to a device for reading from and/or writing to an optical recording medium which has at least two information carrier layers spaced apart from one another, according to the preamble of Claim 1.

A device of this type is disclosed in US-A-4,908,813. What is disadvantageous in the case of this known device is that the optical recording medium is provided with layers sensitive to different wavelengths, which consequently makes it necessary to provide the recording device with a plurality of lasers of different wavelength. Depending on the wavelength, these lasers are relatively complicated and cost-intensive.

The object of the present invention is to propose a device for reading from and/or writing to optical recording media having a plurality of information carrier layers spaced apart from one another which permits a plurality of information carrier layers to be read out and/or written to simultaneously using light of a single wavelength.

This object is achieved by means of the features specified in the characterizing part of Claim 1. This has the advantage that simultaneous reading from or writing to or simultaneous reading from and writing to the optical recording medium is made possible using light of a single wavelength. The different propagation behaviour enables the two partial beams to be focused onto two different information carrier layers by means of a simple optical unit; the different polarization enables simple separation of the partial beams in the detection unit. The device according to the invention may be suitable both for reading from or writing to and for reading from and writing to an optical recording medium. The optical recording medium may be in the form of a disk, such as, for example, a CD or a DVD, but a recording medium in the form of a tape or a recording medium in another form with

REPLACEMENT SHEET
09 DEC 1997

two information carrier layers lying one above the other and spaced apart from one another is also within the scope of the invention. The light source serves to generate a light beam used to read from or write to the optical recording medium. The said light beam is generally reflected from the optical recording medium, but the use of translucent recording media is likewise within the scope of the invention. The optical unit serves to focus the light beam generated by the light source onto the optical recording medium and to direct the reflected or transmitted light beam onto the detection unit. The latter serves to detect the light coming from the optical recording medium and to forward for example electrical signals, on the one hand for obtaining the information stored on the information carrier layer and on the other hand for obtaining parameters which are necessary or useful for the operation of the device, for example a tracking signal. The partial beam generating element is advantageously a birefringent element which can be introduced into a convergent beam or into a divergent beam.

The invention provides for the partial beam generating element to be a birefringent lens. This has the advantage that no additional element is required in the optical unit, since the latter contains lenses in any case. A further advantage may be seen in the fact that a lens composed of birefringent material separates an incident light beam into two partial beams which, on the one hand, are polarized perpendicularly to one another and, on the other hand, are divergent or convergent to different extents, depending on the type of lens and its arrangement.

The invention provides for a polarization direction-rotating element to be arranged in the beam path upstream of the partial beam generating element. This has the advantage that a variable distribution of the light intensity between the two partial beams is achieved by rotating the polarization direction of the incident light. This is advantageous if it is necessary

REPLACEMENT SHEET
05 Dec 1997

to match the intensities of the partial beams to what may be different reflectivities of the information carrier layers. Moreover, the solution is advantageous when recording information items onto one of the information carrier layers. In this case, a higher light power is generally required for the partial beam with which it is intended to effect recording, while the power of the other partial beam, with which it is not intended to effect recording, may be very low. A further advantageous application of this inventive idea resides in the possibility of allocating 100% of the available light intensity to the respective partial beam for the purpose of reading out either one or the other information carrier layer. This is practical for various applications, for example when it is intended to operate with a reduced power of the light source or for the purpose of achieving noise suppression by masking out the respective other information carrier layer, or in other suitable applications. All these different divisions of the intensity between the individual partial beams make it possible to use a cost-effective light source of relatively low power, which, moreover, does not need to be variable in its power output. The polarization direction-rotating element is advantageously a rotatable pole filter. It may likewise be advantageous to arrange the light source, which is in particular a semiconductor laser, such that it is rotatable, or to rotate the polarization direction of the light, for example from a semiconductor laser, by means of a $\lambda/2$ plate, a Kerr cell or in another suitable manner.

According to another advantageous refinement of the present invention, the partial beam generating element comprises an arrangement of two light sources which emit polarized light and are situated at different distances from the optical unit. This has the advantage that a birefringent partial beam generating element is unnecessary. The light sources are preferably lasers, for example semiconductor laser diodes, which emit linearly polarized light. The light is coupled in, for example, by

REPLACEMENT SHEET
05 DEC 1997

means of a semi-transparent mirror or a polarizing beam splitter.

These light sources are advantageously integrated on a single carrier element. This has the advantage that the carrier element is supplied in a manner adjusted to the assembly of the device, with the result that no adjustment is necessary during assembly of the device. It is particularly advantageous if the carrier element is an integrated semiconductor component. A device of this type can be produced such that it is already correctly adjusted.

According to the invention, the detection unit, that is to say the detection path of the device, has a birefringent prism-type beam splitter. This has the advantage of requiring less physical space, since the sensors for the two partial beams can be arranged in one plane. A birefringent prism-type beam splitter has different path lengths for the various polarization directions and consequently makes it possible to transfer the focal points of the two partial beams, which focal points are situated one behind the other in the optical axis of the propagation direction of the beam, into two focal points lying next to one another in a single focal plane perpendicular to the said optical axis.

The detection unit advantageously has a detector plane in which a plurality of detector elements are arranged. This has the advantage that the detector elements all lie in one plane and can therefore be produced cost-effectively as one component. Furthermore, it is not necessary to adjust the individual detector elements when they are being installed in the device.

The invention provides for the detection unit to have a polarization direction-dependent semi-transparent mirror. This has the advantage that the latter can be realized in a cost-effective and space-saving manner, for example as a polarizing beam splitter cube. It serves to divide the partial beams coming from the optical recording medium between the various detector elements.

REPLACEMENT SHEET
05 DEC 1997

The present invention furthermore relates to an optical recording medium, in particular for use in a device according to the invention, which has the features specified in Claim 9, namely that the optical recording medium has an information carrier layer having prerecorded information items as well as an information carrier layer which is spatially separate and spaced apart from the former layer, is suitable for recording information items and has no prerecorded information items. This has the advantage that the said prerecorded information items, which are necessary or at least useful for reading from and/or writing to the optical recording medium, do not have to be prerecorded twice, that is to say on each of the information carrier layers, since both information carrier layers can be read from and/or written to simultaneously by the corresponding device. This enables an increase in the memory space available for useful data recording, a reduction in the manufacturing costs of the optical recording medium, an increase in the signal-to-noise ratio and, in particular, enables the recorded information items on both information carrier layers to lie exactly one above the other, since the device, during the recording of both layers, in each case refers to the information items prerecorded in one layer. Useful data is a term encompassing video, audio and other useful data as well as pure data. The optical recording medium can, of course, also have a plurality of information carrier layers, at least one of which has prerecorded information items which are not prerecorded on the other layer or layers.

The present invention not only relates to the expressly mentioned exemplary embodiments and explanations, but also includes all configurations lying within the scope of the invention.

Further advantageous features and refinements of the invention can be found in the following description with reference to the figures, in which

REPLACEMENT SHEET
06 DEC 1997

Figure 1 shows a device according to the invention with a birefringent prism-type beam splitter,

Figures 2 shows the detection path of a device according to the invention with a polarization direction-dependent semitransparent mirror,

Figure 3 shows part of a device according to the invention with a polarization direction-rotating element in a three-dimensional illustration,

Figure 4 shows part of a device according to the invention with two light sources in a first embodiment,

Figure 5 shows part of a device according to the invention with two light sources in a second embodiment,

Figure 6 shows a detector unit of a device according to the invention, and

Figure 7 shows a detail of an optical recording medium according to the invention.

Figure 1 shows a device according to the invention with a birefringent prism-type beam splitter. A laser diode 1 which emits a linearly polarized light beam 2 serves as light source. This light beam passes through a phase grating 3, which produces +/- first-order secondary beam [sic] required for tracking according to the known three-beam method. This method is discussed only to the extent required to describe the exemplary embodiment. It goes without saying that the invention can also be advantageously used with other tracking methods. After passing through the phase grating 3, the light beam 2 falls onto a birefringent collimator lens 4, which represents the partial beam generating element in the exemplary embodiment. The birefringent collimator lens 4 splits the light beam 2 into two partial beams 5 and 6 which are polarized perpendicularly to one another. The partial beams 5 and 6 pass through a non-polarizing beam splitter 7 and are focused by an objective lens 8 onto different information carrier layers 9 and 10 of the optical recording medium, which is indicated only

REPLACEMENT SHEET
05 DEC 1997

diagrammatically here. For the purpose of focusing, the objective lens 8 can be displaced in the direction of the optical axis, in the left/right direction in Figure 1. For the purpose of tracking along the tracks in which the information items are stored on the information carrier layers 9, 10, the objective lens 8 can be moved parallel to the information carrier layers 9, 10. This is done by a lens drive 11, which is indicated only diagrammatically here by means of double arrows in the respective direction of movement. In order to illustrate the polarization direction of the partial beams 5 and 6, the polarization directions are represented symbolically on the information carrier layers 9 and 10. The partial beam 5 incident on the information carrier layer 9 is, accordingly, polarized in the direction of the plane of the drawing, while the partial beam 6 incident on the information carrier layer 10 is polarized perpendicularly with respect thereto. The partial beams 5, 6 are reflected by the information carrier layers 9, 10, pass through the objective lens 8 and are deflected downwards in the figure, in the non-polarizing beam splitter 7, and reach a focusing lens 12. They subsequently pass through a cylindrical lens 13, which is used to carry out the astigmatism autofocus method, which is not discussed here in any detail. They subsequently impinge on the polarizing prism-type beam splitter 14. The latter has two reflective layers 15 and 16, which each reflect light of one polarization direction. The partial beam 5, which is polarized in the direction of the plane of the drawing, passes through the layer 16, which is reflective for the other polarization direction, and is reflected by the reflective layer 15 onto a sensor S1 of the detector arrangement 17. The partial beam 6, which is polarized perpendicularly to the plane of the drawing, is reflected by the reflective layer 16 onto the sensor S2 of the detector arrangement 17.

According to the invention, the polarization of the light along the optical axis of the device is utilized to produce two mutually separate focal points on

REPLACEMENT SHEET
05 DEC 1997

the information carrier layers 9 and 10. The focal points, which are separated in the longitudinal direction, are produced with the aid of the birefringent collimator lens 4. This facilitates, in the detection path, the separation of the signals originating from the different information carrier layers 9, 10, by using a polarization-sensitive optical arrangement, the polarizing prism-type beam splitter 14 in the exemplary embodiment. According to the invention, it is likewise possible to design the objective lens 8 as a birefringent lens. In this case, the separation in the detection path cannot be realized as easily as in the manner illustrated in Figure 1. A recommended birefringent material for the collimator lens 4 is quartz, for example, whose refractive indices $n_e = 1.5533$ and $n_o = 1.5442$ at a wavelength of about $\lambda \approx 700$ nm, the wavelength region usually used for corresponding devices, enables [sic] focal point separation which is sufficient for the usual dimensions of the write/read head.

The reflective layers 15, 16 of the polarizing prism-type beam splitter 14 are arranged parallel to one another at a distance d. By suitable selection of the distance d, an optical path length is inserted which enables the two focal points, which impinge on the information carrier layers 9 and 10 spaced apart from one another, to be imaged on the detector arrangement 17 in one plane. Assuming that the focal length of the focusing lens 12 is 42 mm and that of the objective lens 8 is 3.5 mm, the resulting magnification factor is $\eta = 12$, which, assuming that the distance between the information carrier layers 9, 10 is $\delta = 70$ nm, results in a required thickness d of

$$d = \frac{\eta * \delta}{2\sqrt{2}} \approx 0.3 \text{ mm}$$

Figure 2 illustrates the detection path of a device according to the invention, that is to say the region of Figure 1 which is represented below the

REPLACEMENT SHEET
05 DEC 1997

cylindrical lens 13. After passing through the cylindrical lens 13, the partial beams 5 and 6 coming from the optical recording medium impinge on a polarizing beam splitter cube 18, which has a reflective layer 16'. The partial beam 5, which is polarized in the plane of the drawing, passes through this reflective layer 16' and impinges on a sensor S1'. The partial beam 6, which is polarized perpendicularly with respect thereto, is reflected by the reflective layer 16 and directed onto the sensor S2'. The two sensors S1' and S2' are adjusted with respect to one another in the detection unit. In this exemplary embodiment, it is possible to dispense with a polarizing prism-type beam splitter having reflective layers arranged at a distance d.

Figure 3 shows part of a device according to the invention with a polarization direction-rotating element 20 in a three-dimensional illustration. The laser diode 1 and the light beam 2 emitted by it can be discerned. The polarization direction is specified by the indication of the polarization vector E_L of the polarization direction-rotating element 20. In the birefringent collimator lens 4, the polarization direction for the ordinary beam is indicated by n_o and the polarization direction for the extraordinary beam is indicated by n_e. The corresponding partial beams 5 and 6 are indicated in the further beam path. In the illustration represented, the polarization vector E_L is shown having been rotated through 45° with respect to the preferred directions of the birefringent collimator lens 4 which are indicated by the arrows n_o and n_e. By rotating the polarization E_L of the light beam 2 with respect to the crystal axes n_o and n_e of the collimator lens 4, the intensity of the two collimated, polarized partial beams 5, 6 can be adjusted in a continuously variable manner. The two intensities have the same magnitude at an angle of 45°. Particularly for writing to a writable information carrier layer 9 and/or 10, it is practical to increase the intensity of the partial beam 5 and/or 6 used for writing in comparison

REPLACEMENT SHEET
05 DEC 1997

with the respective other partial beams 6 and/or 5, for example in the ratio 80:20.

Figure 4 shows part of a device according to the invention with two light sources in a first embodiment. Two separate laser diodes 1′ and 1′′, which have a small lateral offset as well as an offset in the longitudinal direction, that is to say in the beam propagation direction, are provided in this case. This is illustrated in a greatly exaggerated manner in Figure 4. Furthermore, the laser diodes 1′ and 1′′ are aligned in such a way that the light beams 2′ and 2′′ generated by them are polarized perpendicularly to one another. A conventional collimator lens 4′ is used in this case. The further beam path corresponds to that described in relation to Figure 1 and in relation to Figure 2. With a suitable lateral offset, it may be possible to achieve greater splitting of the partial beams in the region of the detector arrangement 17, with the result that it is possible to provide a less elaborate solution in this case.

Figure 5 represents a second embodiment of a device according to the invention with two light sources. In this case, too, use is made of two separate laser diodes 1′, 1′′, whose light beams 2′, 2′′ are combined by means of a semi-transparent reflective film 19 and are directed onto a conventional collimator lens 4′. The distance x_1 between the laser diode 1′ and the semi-transparent reflective film 19 and the distance x_2 between the laser diode 1′′ and the semi-transparent reflective film 19 are selected to be different, thereby producing longitudinally displaced focal points for the two light beams 2′ and 2′′, corresponding to the distance between the information carrier layers 9 and 10. The advantage of this embodiment over that described in Figure 4 resides in the fact that the light beams 2′ and 2′′ are not laterally offset with respect to one another, since both laser diodes 1′ and 1′′ can be arranged exactly in the optical axis. In this case, too, the further beam path corresponds to that described in relation to Figure 1 and Figure 2.

REPLACEMENT SHEET
05 DEC 1997

Figure 6 represents the detector arrangement 17 of a device according to the invention. The sensors S_1 and S_2 on which partial beams 5 and 6, respectively, are imaged can be discerned. In the exemplary embodiment, the sensor S_1 is divided into four quadrants consisting of the detector elements A, B, C, D. This division makes it possible to form a focusing signal FE in accordance with the astigmatism focus method. This is illustrated in the right-hand part of Figure 6. FE results from the difference between the respective sum of two diagonally arranged detector elements: FE = (A + C) - (B + D). Further detector elements E and F serve to obtain a tracking signal TE in accordance with the three-beam method. The light beam 2 is split by the phase grating 3 into a zeroth-order primary beam and two +/- first-order secondary beams, which is not illustrated in the previous figures for the sake of simplicity. In Figure 6, the light spots originating from these beams are indicated in each case as a circular spot on the detector elements. The zeroth-order primary beam falls onto the central area of the sensor S_1 and of the sensor S_2, while the +/- first-order secondary beams of the partial beam 5 fall onto the detector elements E and F. Since no detector elements are provided for the +/- first-order secondary beams of the partial beam 6, the corresponding light spots are indicated by dashed lines. The tracking signal TE results from the difference between the signals emitted by the detector elements E and F. The partial beam 6 falls onto the sensor S2, which consists of a single detector element G. The information signal of the partial beam 6 consequently corresponds to the output signal of the detector element G, and the information signal of the partial beam 5 corresponds to the sum of the output signals of the detector elements A to D. This is likewise indicated in the right-part of Figure 6. The imaging, described here, of the two focal points, that on the information carrier layer 9 and that on the information carrier layer 10, onto a single detector arrangement 17 is possible due to the use of the

REPLACEMENT SHEET
05 DEC 1997

polarizing prism-type beam splitter 14. It goes without saying that corresponding detector elements to those in the region of the sensor 1 can also be arranged in the region of the sensor 2, if appropriate, in order to improve focusing and tracking. Furthermore, it is possible to use other focusing and tracking methods, the detector arrangement 17 having to be constructed in accordance with these methods.

Figure 7 illustrates a detail of an optical recording medium according to the invention in the region of the information carrier layers 9 and 10. The arrangement of two information carrier layers makes it possible to accommodate about double the volume of data on the optical recording medium. A further increase in the storage capacity is produced if further information carrier layers are arranged correspondingly. With the multiple-focus optical arrangement according to the invention, two of these information carrier layers can be read out simultaneously, since the distance between the focal points of the partial beams 5 and 6 corresponds ΔZ to the distance [sic] between the two information carrier layers 9 and 10. The information tracks of the information carrier layers 9 and 10 in this case lie one above the other, with the result that not only are both partial beams 5 and 6 focused simultaneously on a respective information carrier layer, but they can also simultaneously read usable information items there. The information carrier layer 10 is semi-transparently reflective, with the result that the partial beam 5 can pass through it. An interesting application of the present invention is when the optical recording medium is a so-called ROM/RAM disk. In this case, for example, the information carrier layer 9 is a ROM layer. That is to say it contains only read information items in a pre-embossed information track. The information carrier layer 10 is designed as a storage layer. This may be a phase change layer, a photorefractive layer, a magneto-optical layer or any other layer suitable for recording. However, the information carrier layer 10 is constructed without a

REPLACEMENT SHEET
05 DEC 1997

leader track which is usually present in the case of recording layers. An optical recording medium of this type is read from and written to using a double-focus system, i.e. the device according to the invention as explained above, for example. This has the advantage that the information track and/or a leader track of the information carrier layer 9 can be used for focusing, tracking, disk control and the addressing of the areas of the information carrier layers 9, 10. During the writing operation in the information carrier layer 10, a data track is automatically written in exactly above the track of the information carrier layer 9. Since the information carrier layer is a planar, uniform area without a leader track or additional addressing information items, the signal-to-noise ratio that can be achieved is higher, since an additional noise signal due to any roughness of the edges of a leader track or from addressing bits are [sic] not produced. Moreover, the entire storage capacity of the information carrier layer can be utilized for data storage, since it is not necessary for any address or servo information items, such as, for example, for tracking, to be located on the information carrier layer 10. Using the method, described in relation to Figure 3, for rotating the polarization direction with respect to the crystal axis of the birefringent collimator lens 4, it is possible correspondingly to adjust the light intensity for writing on the information carrier layer 10. For example, the intensity of the partial beam 5 reading on the information carrier layer 9 may be about 10% of the total power of the laser diode 1, and the intensity of the partial beam 6 used for writing on the information carrier layer 10 may accordingly be about 90% of the said power.

* C L M S *

REPLACEMENT SHEET
05 DEC 1997

Patent Claims

1. Device for reading from or writing to an optical recording medium which has at least two information carrier layers (9, 10) spaced apart from one another, having a light source (1, 1', 1''), an optical unit and a detection unit, characterized in that a partial beam generating element (4, 1', 1'', 19) is present, which emits two partial beams (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour, thus having a focal point on both layers (9, 10) simultaeneously.

2. Device according to Claim 1, characterized in that the partial beam generating element is a birefringent lens (4).

3. Device according to either of Claims 1 and 2, characterized in that a polarization direction-rotating element (20) is arranged in the beam path upstream of the partial beam generating element (4).

4. Device according to Claim 1, characterized in that the partial beam generating element is an arrangement of two light sources (1', 1'') which emit polarized light and are at different distances from the optical unit.

5. Device according to Claim 4, characterized in that the light sources 1', 1'') are integrated on a single carrier element.

6. Device according to one of Claims 1 to 5, characterized in that the detection unit has a birefringent prism-type beam splitter (14).

7. Device according to Claim 6, characterized in that the detection unit has a detector arrangement (17), in which a plurality of detector elements (A, B, C, D, E, F, G) are arranged in one plane.

8. Device according to one of Claims 1 to 5, characterized in that the detection unit has a polarization direction-dependent semi-transparent mirror (16').

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C L M S *

REPLACEMENT SHEET
05 DEC 1997

9. Optical recording medium particularly for use in a device according to one of the preceding claims, characterized in that the optical recording medium has an information carrier layer (9) with prerecorded information items, as well as an information carrier layer (10) which is spatially separate and spaced apart from the former layer, is suitable for recording information items and has no corresponding prerecorded information items.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

REPLACEMENT SHEET
05 DEC 1997

ABSTRACT

Device for reading from or writing to an optical recording medium

The present invention relates to a device for reading from or writing to an optical recording medium which has at least two information carrier layers (9, 10) spaced apart from one another, as well as a light source (1, 1', 1''), an optical unit and a detection unit. The object of the present invention is to propose a device of this type which permits a plurality of information carrier layers to be read from and/or written to simultaneously using light of a single wavelength. According to the invention, a partial beam generating element (4, 1', 1'', 19) is present for this purpose, which element emits two partial beams (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour.

The present invention is advantageously employed in devices for reading from or writing to optical recording media such as, for example, CD, CD-ROM, DVD, laser disk or the like.

Figure 1

REMPLACEMENT SNB
0 5 DEC 1997

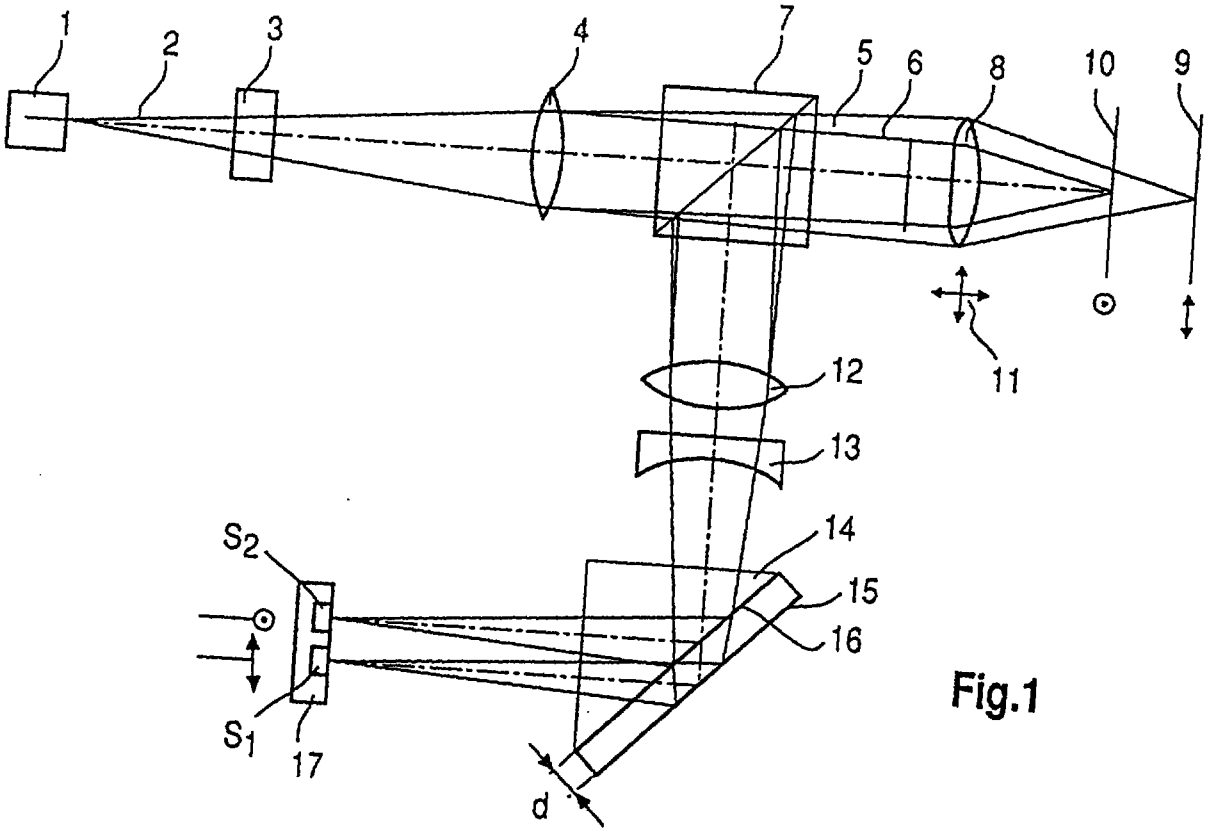


Fig.1

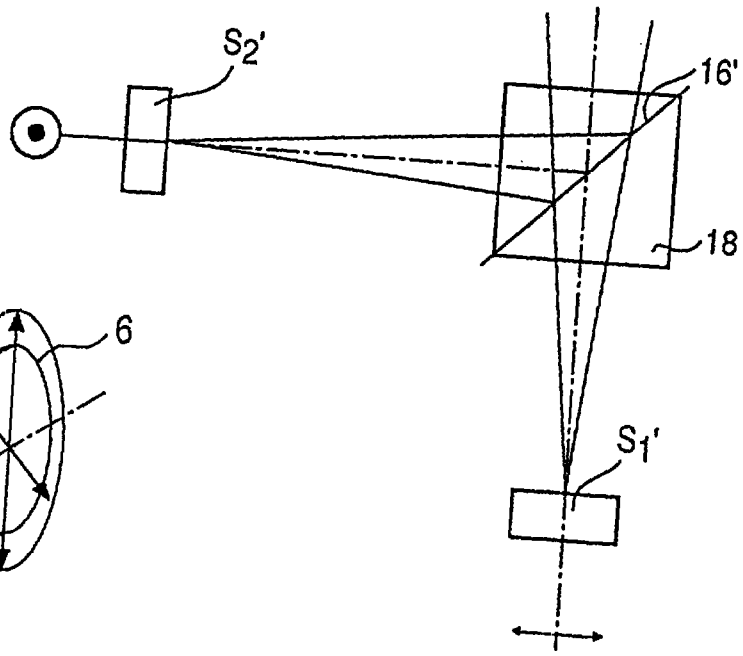


Fig.2

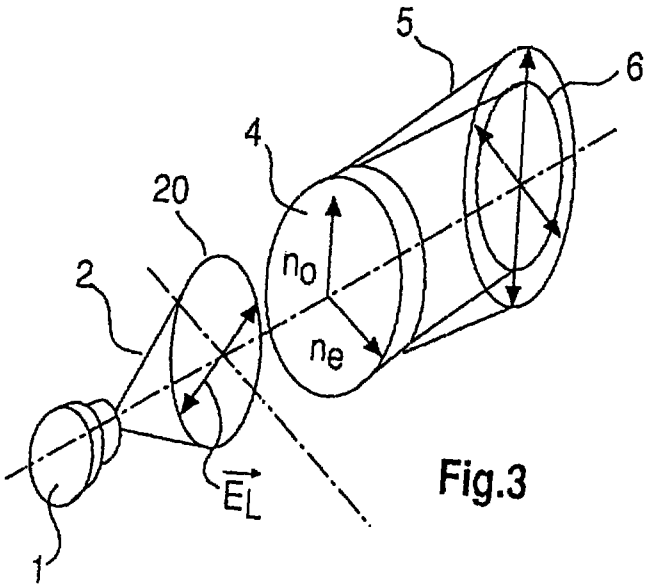


Fig.3

REPLACEMENT SHEET
05 DEC 1997

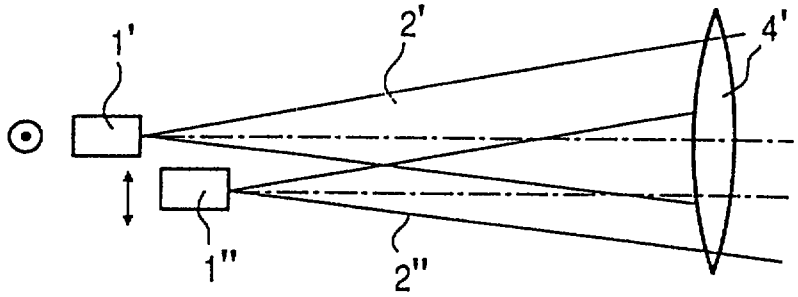


Fig.4

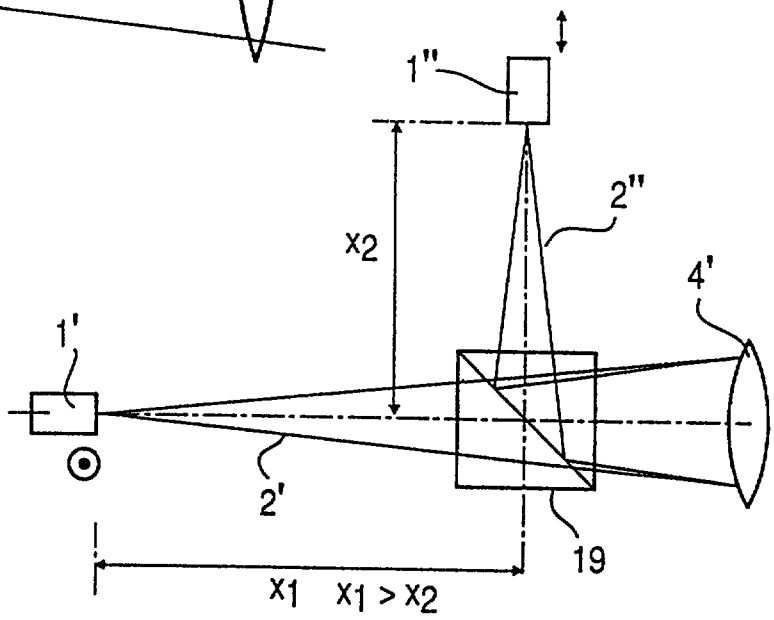


Fig.5

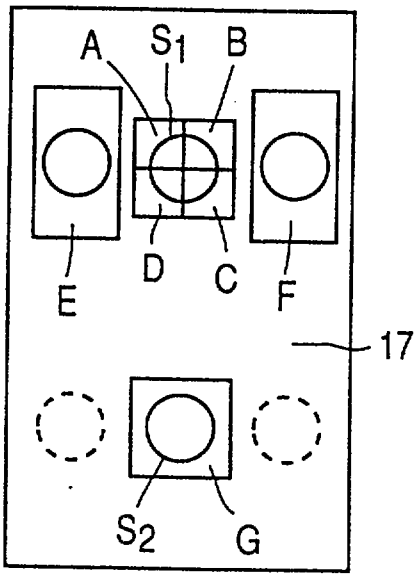
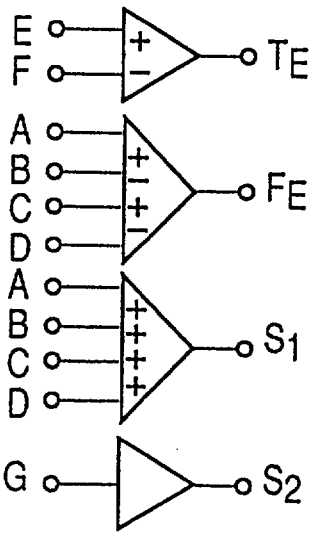


Fig.6



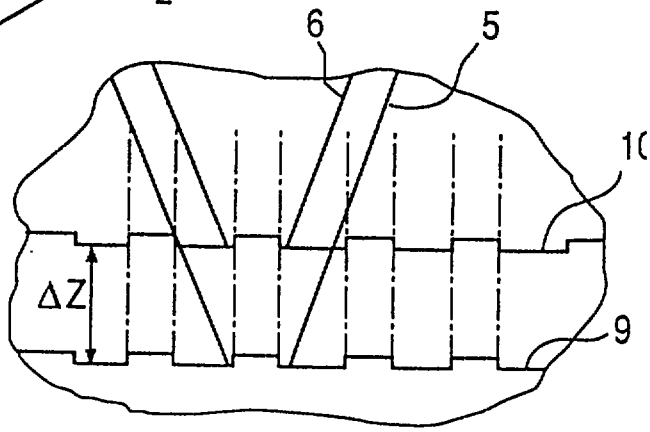


Fig.7

9703492-0
IPOS

* C L M S *

REPLACEMENT SHEET
20 JAN 1999

Patent Claims

1) Device for reading from or writing to an optical recording medium which has at least a first and a second information carrier layer (9, 10) said first and second layer (9, 10) being spaced apart from one another, the device having a light source (1, 1', 1"), an optical unit and a detection unit, characterized in that a partial beam generating element (4, 1', 1", 19) is present, which emits a first and a second polarized beam (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour, thus having a focal point of the first polarized beam (5, 2') on one of said layers (9, 10) and a focal point of the second polarized beam (6, 2") on another of said layers (9, 10) simultaneously.

2) Device for reading from or writing to an optical recording medium which has at least two information carrier layers (9, 10) spaced apart from one another, having a light source (1, 1', 1''), an optical unit and a detection unit, characterized in that a partial beam generating element (4, 1', 1'', 19) is present, which emits two partial beams (5, 6, 2', 2'') which differ in terms of polarization direction and propagation behaviour, thus having a focal point on both layers (9, 10) simultaeneously, and that a polarization-direction-rotating element (20) is arranged in the beam path upstream of the partial beam generating element (4).

3) Device according to Claim 1, characterized in that the partial beam generating element is a birefringent lens (4).

4) Device according to either of Claims 1 or 3, characterized in that a polarization direction-rotating element (20) is arranged in the beam path upstream of the partial beam generating element (4).

5) Device according to Claim 1, characterized in that the partial beam generating element is an arrangement of two light sources (1', 1'') which emit polarized light and are at different distances from the optical unit.

6) Device according to Claim 5, characterized in that the light sources (1', 1'') are integrated on a single carrier element.

* C L M S *

REPLACEMENT SHEET
28 JAN 1999

7) Device according to one of Claims 1 to 6, characterized in that the detection unit has a birefringent prism-type beam splitter (14).

8) Device according to Claim 7, characterized in that the detection unit has a detector arrangement (17), in which a plurality of detector elements (A, B, C, D, E, F, G) are arranged in one plane.

9) Device according to one of Claims 1 to 6, characterized in that the detection unit has a polarization direction-dependent semi-transparent mirror (16').

10) **Optical recording medium particularly for use in a device for simultaneously reading from or writing to different information carrier layers (9, 10) of an optical recording medium characterized in that the optical recording medium has a first information carrier layer (9) having prerecorded information items, and a second information carrier layer (10) which is spatially separate and spaced apart from said first layer (9), said second layer (10) being suitable for recording information items and being free of corresponding prerecorded information items.**