


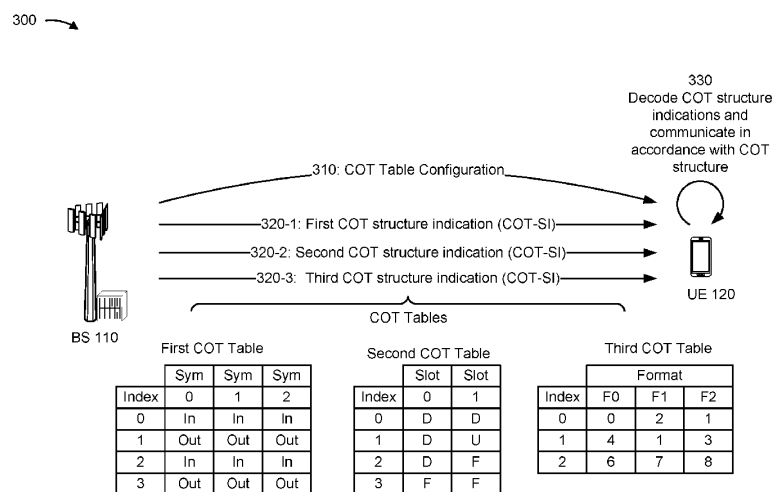

- (51) **International Patent Classification:**
H04W 72/12 (2009.01)
- (21) **International Application Number:**
PCT/US2020/024934
- (22) **International Filing Date:**
26 March 2020 (26.03.2020)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
201941011973 27 March 2019 (27.03.2019) IN
201941046921 18 November 2019 (18.11.2019) IN
16/829,872 25 March 2020 (25.03.2020) US
- (71) **Applicant: QUALCOMM INCORPORATED** [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).
- (72) **Inventors: SUN, Jing;** 5775 Morehouse Drive, San
Diego, California 92121 (US). **THYAGARAJAN, Anan-
ta Narayanan;** 5775 Morehouse Drive, San Diego, Califor-
nia 92121 (US). **ZHANG, Xiaoxia;** 5775 Morehouse Drive,
San Diego, California 92121 (US). **BHATTAD, Kapil;**
5775 Morehouse Drive, San Diego, California 92121 (US).
- (74) **Agent: HARRITY, John E.** et al.; 11350 Random Hills
Road, Suite 600, Fairfax, Virginia 22030 (US).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) **Title:** CHANNEL OCCUPANCY TIME (COT) STRUCTURE INDICATION**FIGURE 3A**

(57) **Abstract:** This disclosure provides systems, methods and apparatus for a user equipment (UE), operating in a shared spectrum in a connected state or an idle state, to receive a channel occupancy time structure information (COT-SI) which includes one or more of a COT duration, a COT end symbol, and a COT pause indication, in addition to slot format indication for one or more slots. Some aspects described herein define a hierarchical approach to COT structure information (COT-SI) signaling. For example, a UE may be configured with a set of short COT tables using remaining minimum system information (RMSI) signaling and may receive concatenation of COT-SI signaling identifying index values in a control channel corresponding to one or more of the set of COT tables. Based on receiving COT-SI signaling, the UE may communicate in accordance with an occurrence of a COT.

[Continued on next page]

SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))