

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau9900656-1
IP02

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : B05B 1/24, 1/18	A1	(11) International Publication Number: WO 98/07522
		(43) International Publication Date: 26 February 1998 (26.02.98)

(21) International Application Number: PCT/BR97/00005

(22) International Filing Date: 18 February 1997 (18.02.97)

(30) Priority Data:

MU 7601258-1	19 August 1996 (19.08.96)	BR
PI 9700871-0	6 February 1997 (06.02.97)	BR
PI 9700872-9	6 February 1997 (06.02.97)	BR

(71)(72) Applicant and Inventor: MARTINS GOMES, João, Carlos [BR/BR]; Rua Nebraska, 497, CEP-04560-012 São Paulo, SP (BR).


(74) Agent: FREITAS GOMES, Ana, Maria; Edmundo Brunner Assessoria S/C Ltda., Avenida Brigadeiro Luís Antonio, 4329, CEP-01401-002 São Paulo, SP (BR).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: ELECTRIC SHOWER

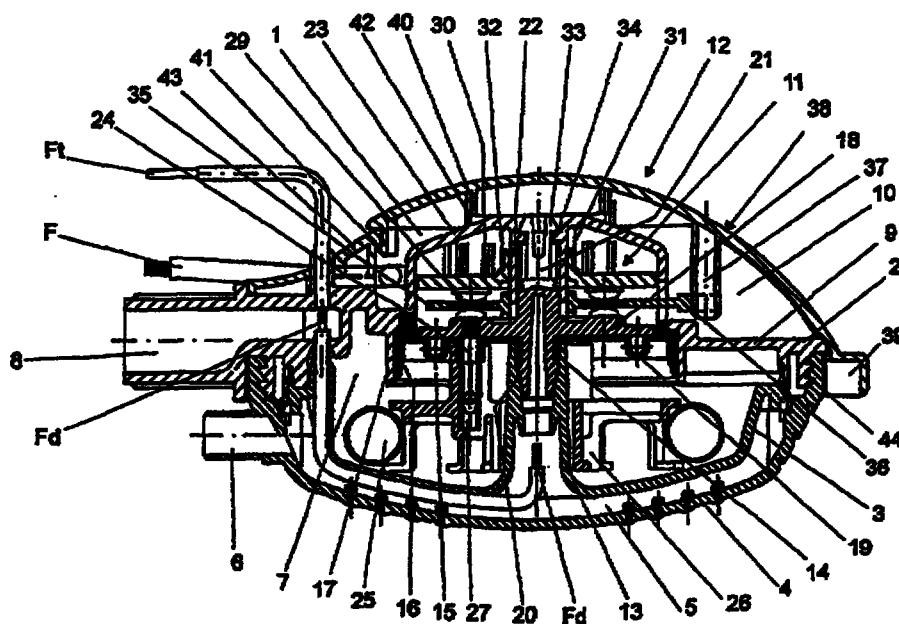

(57) Abstract

The subject is an electric shower comprising a shell-shaped body (1), a separator disk (3) being positioned under it, a spreader (4) forming a first distribution chamber (5) with a side tubular outlet (6), while inside the body there is formed the wet heating chamber (7) limited by an intermediate wall (9) below the dry assembling chamber (10), closed on top by the temperature selection device (12). Water takes in through connection (8), passes chamber (7) causing pressure increase to actuate diaphragm (15) and simultaneously moving plate (18), closing contacts (28 and 29) causing the resistors to operate.