

- 1 -

TITLE OF THE INVENTION

APPARATUS AND METHOD FOR ELECTROLYTICALLY DEPOSITING
COPPER ON A SEMICONDUCTOR WORKPIECE

BACKGROUND OF THE INVENTION

In the fabrication of microelectronic devices, application of one or more metallization layers is often an important step in the overall fabrication process. The metallization may be used in the formation of discrete microelectronic components, such as read/write heads, but it is more often used to interconnect components formed on a workpiece, such as a semiconductor workpiece. For example, such structures are used to interconnect the devices of an integrated circuit.

A basic understanding of certain terms used herein will assist the reader in understanding the disclosed subject matter. To this end, basic definitions of certain terms, as used in the present disclosure, are set forth below.

Single Metallization Level is defined as a composite level of a

- 2 -

workpiece that is exterior to the substrate. The composite level comprises one or more metal structures.

Substrate is defined as a base layer of material over which one or more metallization levels are disposed. The substrate may be, for example, a semiconductor wafer, a ceramic block, etc.

Workpiece is defined as an object that at least comprises a substrate, and may include further layers of material or manufactured components, such as one or more metallization levels, disposed on the substrate.

An integrated circuit is an interconnected ensemble of devices formed within a semiconductor material and within a dielectric material that overlies a surface of the semiconductor. Devices which may be formed within the semiconductor include MOS transistors, bipolar transistors, diodes and diffused resistors. Devices which may be formed within the dielectric include thin-film resistors and capacitors. Typically, more than 100 integrated circuit die (IC chips) are constructed on a single 8 inch diameter silicon wafer. The devices utilized in each die are interconnected by conductor paths formed within the dielectric. Typically, two or more levels of conductor paths, with successive levels separated by a dielectric layer, are employed as interconnections. In current practice, an aluminum alloy and silicon oxide are typically used for, respectively, the conductor and dielectric.

Delays in propagation of electrical signals between devices on a single die

- 3 -

limit the performance of integrated circuits. More particularly, these delays limit the speed at which an integrated circuit may process these electrical signals. Larger propagation delays reduce the speed at which the integrated circuit may process the electrical signals, while smaller propagation delays increase this speed. Accordingly, integrated circuit manufacturers seek ways in which to reduce the propagation delays.

For each interconnect path, signal propagation delay may be characterized by a time delay τ . See E.H. Stevens, *Interconnect Technology*, QMC, Inc., July 1993.

An approximate expression for the time delay, τ , as it relates to the transmission of a signal between transistors on an integrated circuit is given below.

$$\tau = RC[1 + (V_{SAT}/RI_{SAT})]$$

In this equation, R and C are, respectively, an equivalent resistance and capacitance for the interconnect path and I_{SAT} and V_{SAT} are, respectively, the saturation (maximum) current and the drain-to-source potential at the onset of current saturation for the transistor that applies a signal to the interconnect path. The path resistance is proportional to the resistivity, ρ , of the conductor material. The path capacitance is proportional to the relative dielectric permittivity, K_e , of the dielectric material. A small value of τ requires that the interconnect line carry a

- 4 -

current density sufficiently large to make the ratio V_{SAT}/RI_{SAT} small. It follows therefore, that a low- ρ conductor which can carry a high current density and a low- K_e dielectric must be utilized in the manufacture of high-performance integrated circuits.

To meet the foregoing criterion, copper interconnect lines within a low- K_e dielectric will likely replace aluminum-alloy lines within a silicon oxide dielectric as the most preferred interconnect structure. See "Copper Goes Mainstream: Low-k to Follow", *Semiconductor International*, November 1997, pp. 67-70. Resistivities of copper films are in the range of 1.7 to 2.0 $\mu\Omega\text{cm}$; resistivities of aluminum-alloy films are in the range of 3.0 to 3.5 $\mu\Omega\text{cm}$.

Despite the advantageous properties of copper, it has not been as widely used as an interconnect material as one would expect. This is due, at least in part, to the difficulty of depositing copper metallization and, further, due to the need for the presence of barrier layer materials. The need for a barrier layer arises from the tendency of copper to diffuse into silicon junctions and alter the electrical characteristics of the semiconductor devices formed in the substrate. Barrier layers made of, for example, titanium nitride, tantalum nitride, etc., must be laid over the silicon junctions and any intervening layers prior to depositing a layer of copper to prevent such diffusion.

A number of processes for applying copper metallization to semiconductor

- 5 -

workpieces have been developed in recent years. One such process is chemical vapor deposition (CVD), in which a thin copper film is formed on the surface of the barrier layer by thermal decomposition and/or reaction of gas phase copper compositions. A CVD process can result in conformal copper coverage over a variety of topological profiles, but such processes are expensive when used to implement an entire metallization layer.

Another known technique, physical vapor deposition (PVD), can readily deposit copper on the barrier layer with relatively good adhesion when compared to CVD processes. One disadvantage of PVD processes, however, is that they result in poor (non-conformal) step coverage when used to fill microstructures, such as vias and trenches, disposed in the surface of the semiconductor workpiece. For example, such non-conformal coverage results in less copper deposition at the bottom and especially on the sidewalls of trenches in the semiconductor devices.

Inadequate deposition of a PVD copper layer into a trench to form an interconnect line in the plane of a metallization layer is illustrated in Fig. 1. As illustrated, the upper portion of the trench is effectively "pinched off" before an adequate amount of copper has been deposited within the lower portions of the trench. This results in an open void region that seriously impacts the ability of the metallization line to carry the electrical signals for which it was designed.

Electrochemical deposition of copper has been found to provide the most

- 6 -

cost-effective manner in which to deposit a copper metallization layer. In addition to being economically viable, such deposition techniques provide substantially conformal copper films that are mechanically and electrically suitable for interconnect structures. These techniques, however, are generally only suitable for applying copper to an electrically conductive layer. As such, an underlying conductive seed layer is generally applied to the workpiece before it is subject to an electrochemical deposition process. Techniques for electrodeposition of copper on a barrier layer material have not heretofore been commercially viable.

The present inventors have recognized that there exists a need to provide copper metallization processing techniques that 1) provide conformal copper coverage with adequate adhesion to the barrier layer, 2) provide adequate deposition speeds, and 3) are commercially viable. These needs are met by the apparatus and processes of the present invention as described below.

- 7 -

BRIEF SUMMARY OF THE INVENTION

This invention employs a novel approach to the copper metallization of a workpiece, such as a semiconductor workpiece. In accordance with the invention, an alkaline electrolytic copper bath is used to electroplate copper onto a seed layer, electroplate copper directly onto a barrier layer material, or enhance an ultra-thin copper seed layer which has been deposited on the barrier layer using a deposition process such as PVD. The resulting copper layer provides an excellent conformal copper coating that fills trenches, vias, and other microstructures in the workpiece. When used for seed layer enhancement, the resulting copper seed layer provide an excellent conformal copper coating that allows the microstructures to be filled with a copper layer having good uniformity using electrochemical deposition techniques. Further, copper layers that are electroplated in the disclosed manner exhibit low sheet resistance and are readily annealed at low temperatures.

The disclosed process, as noted above, is applicable to a wide range of steps used in the manufacture of a metallization layer in a workpiece. The workpiece may, for example, be a semiconductor workpiece that is processed to form integrated circuits or other microelectronic components. Without limitation as to the applicability of the disclosed invention, a process for enhancing a seed layer is described.

A process for applying a metallization interconnect structure to a workpiece

- 8 -

having a barrier layer deposited on a surface thereof is also set forth. The process includes the forming of an ultra-thin metal seed layer on the barrier layer. The ultra-thin seed layer has a thickness of less than or equal to about 500 Angstroms and may be formed from any material that can serve as a seed layer for subsequent metal deposition. Such metals include, for example, copper, copper alloys, aluminum, aluminum alloys, nickel, nickel alloys, etc.. The ultra-thin seed layer is then enhanced by depositing additional metal thereon in a separate deposition step to provide an enhanced seed layer that is suitable for use in a primary metal deposition. The enhanced seed layer has a thickness at all points on sidewalls of substantially all recessed features distributed within the workpiece that is equal to or greater than about 10% of the nominal seed layer thickness over an exteriorly disposed surface of the workpiece.

In accordance with a specific embodiment of the process, a copper-containing metallization interconnect structure is formed. To this end, the ultra-thin seed layer is enhanced by subjecting the semiconductor workpiece to an electrochemical copper deposition process in which an alkaline bath having a complexing agent is employed. The copper complexing agent may be at least one complexing agent selected from a group consisting of EDTA, ED, and a polycarboxylic acid such as citric acid or salts thereof.

Various plating bath compositions suitable for blanket plating, fill-plating of

- 9 -

recessed micro-structures, and seed layer enhancement plating are also set forth. A preferred solution for electroplating copper for seed layer enhancement comprises copper sulfate, boric acid, and a complexing agent. The complexing agent is preferably selected from the group consisting of ED, EDTA, and a polycarboxylic acid, such as citric acid. This solution is also suitable for blanket plating and fill-plating of recessed micro-structures.

A plating solution that improves the resistivity of the resulting copper film is also set forth. The plating solution preferably comprises copper sulfate, ammonium sulfate, and ethylene glycol. This solution is also suitable for blanket plating and fill-plating of recessed micro-structures.

- 10 -

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

Fig. 1 is a cross-sectional view illustrating an interconnect line formed completely by PVD copper.

Figs. 2A – 2E are cross-sectional views through a semiconductor workpiece illustrating the various layers of material as they are applied in accordance with one embodiment of the present invention.

Fig. 3 is a schematic representation of an apparatus suitable for enhancing an ultra-thin seed layer.

Fig. 4A is a graph illustrating the current-potential curves of a plating solution using a polycarboxylic acid, such as citric acid, as a complexing agent.

Fig. 4B a graph illustrating the current-potential curves of a plating solution using EDTA, an amine-containing plating solution, as the complexing agent.

Fig. 4C is a graph of sheet resistance change with annealing temperature for copper films deposited from a bath solution with and without ammonium sulfate.

Fig. 4D is a graph illustrating plating solution conductivity as a function of ethylene glycol concentration in collating solutions with and without ammonium sulfate.

Fig. 5 is a scanning eletromicrograph photograph illustrating an ultra-thin seed layer.

- 11 -

Fig. 6A is a scanning eletromicrograph photograph illustrating an ultra-thin seed layer that has been enhanced in a citric acid bath.

Fig. 6B is a scanning eletromicrograph photograph illustrating an ultra-thin seed layer that has been enhanced in an EDTA bath.

Fig. 7 is a schematic representation of a section of a semiconductor manufacturing line suitable for implementing the disclosed seed layer enhancement steps.

- 12 -

DETAILED DESCRIPTION OF THE INVENTION

This invention employs a novel approach to applying copper metallization to a workpiece, such as a semiconductor workpiece. In accordance with the invention, an alkaline electrolytic copper bath is used to electroplate copper onto a seed layer, electroplate copper directly onto a barrier layer material, or enhance an ultra-thin copper seed layer which has been deposited on the barrier layer using a deposition process such as PVD. Additionally, a method for applying a metallization layer will be disclosed. Although the disclosed method may be used in connection with a substantial number of different metal compositions, the specific embodiment disclosed herein is directed to the application of a copper-containing metallization layer. To this end, an alkaline electrolytic copper bath is used to enhance an ultra-thin copper seed layer which has been deposited on a barrier layer using a deposition process such as PVD. The enhanced copper seed layer provides an excellent conformal copper coating that allows trenches and vias to be subsequently filled with a copper layer having good uniformity using electrochemical deposition techniques.

A cross-sectional view of a micro-structure, such as trench 5, that is to be filled with copper metallization is illustrated in Fig. 2A and will be used to describe the seed layer enhancement aspects of the present invention. As shown, a thin barrier layer 10 of, for example, titanium nitride or tantalum nitride is deposited over the surface of a semiconductor device or, as illustrated in Fig. 2A, over a layer

- 13 -

of a dielectric 8, such as silicon dioxide. The barrier layer 10 acts to prevent the migration of copper to any semiconductor device formed in the substrate. Any of the various known techniques, such as CVD or PVD, can be used to deposit the barrier layer depending on the particular barrier material being used. Preferably, the thickness for the barrier layer is approximately 100 to 300 Angstroms.

After the deposition of the barrier layer, an ultra-thin copper seed layer 15 is deposited on the barrier layer 10. The resulting structure is illustrated in Fig. 2B. Preferably, the copper seed layer 15 is formed using a vapor deposition technique, such as CVD or PVD. In order to have adequate adhesion and copper coverage, a relatively thick (1000 Angstroms) copper seed layer is usually required. Such a thick seed layer leads to problems with close-off of small geometry trenches, however, when a PVD deposition process is employed for applying the seed layer.

Contrary to traditional thoughts regarding seed layer application, the copper seed layer 15 of the illustrated embodiment is ultra-thin, having a thickness of about 50 to about 500 Angstroms, preferably about 100 to about 250 Angstroms, and most preferably about 200 Angstroms. The ultra-thin copper seed layer can be deposited using a CVD or a PVD process, or a combination of both. PVD is the preferred application process, however, because it can readily deposit copper on the barrier layer 10 with relatively good adhesion. By depositing an ultra-thin seed layer of copper, rather than the relatively thick seed layer used in the prior art, pinching off of

- 14 -

the trenches can be avoided.

The use of an ultra-thin seed layer 15 generally introduces its own set of problems. One of the most significant of these problems is the fact that such ultra-thin layers do not generally coat the barrier layer 10 in a uniform manner. Rather, voids or non-continuous seed layer regions on the sidewalls, such as at 20, are often present in an ultra-thin seed layer 15 thereby resulting in the inability to properly apply a subsequent electrochemically deposited copper layer in the regions 20. Further, ultra-thin seed layers tend to include spikes, such as at 21, that impact the uniformity of the subsequent electrolytically deposited metal layer. Such spikes 21 result in high potential regions at which the copper deposits at a higher rate than at other, more level regions. As such, the seed layer 15 is not fully suitable for the traditional electroplating techniques typically used after application of a seed layer.

The present inventors have found that an ultra-thin seed layer can be employed if it is combined with a subsequent electrochemical seed layer enhancement technique. To this end, the semiconductor workpiece is subject to a subsequent process step in which a further amount of copper 18 is applied to the ultra-thin seed layer to thereby enhance the seed layer. A seed layer enhanced by the additional deposition of copper is illustrated in Fig. 2C. As shown in Fig. 2C, the void or non-continuous regions 20 of Fig. 2B have been filled thereby leaving substantially all of the barrier layer 10 covered with copper.

- 15 -

Preferably, the seed layer enhancement process continues until a sidewall step coverage, i.e., the ratio of the seed layer thickness at the bottom sidewall regions 22 to the nominal thickness of the seed layer at the exteriorly disposed side 23 of the workpiece, achieves a value of at least 10%. More preferably, the sidewall step coverage is at least about 20%. Such sidewall step coverage values are present in substantially all of the recessed structures of the semiconductor workpiece. It will be recognized, however, that certain recessed structures distributed within the semiconductor workpiece may not reach these sidewall step coverage values. For example, such structures disposed at the peripheral edges of a semiconductor wafer may not reach these step coverage values. Similarly, defects or contaminants at the situs of certain recessed structures may prevent them from reaching the desired coverage values. The nominal thickness of the enhanced seed layer at the exteriorly disposed side of the workpiece is preferably in the range of 500 angstroms 1600 angstroms.

Although the embodiment of the process disclosed herein is described in connection with copper metallization, it is understood that the basic principle of the enhancement of an ultra-thin seed layer prior to the bulk deposition thereof can be applied to other metals or alloys that are capable of being electroplated. Such metals include iron, nickel, cobalt, zinc, copper-zinc, nickel-iron, cobalt-iron, etc.

A schematic representation of an apparatus 25 suitable for enhancing the

- 16 -

ultra-thin copper seed layer is illustrated in Fig. 3. It will be recognized that this apparatus is also suitable for applying a blanket plating layer and/or full-fill plating of recessed micro-structures. As shown, a semiconductor workpiece, such as a semiconductor wafer 30, is positioned face down in a bath 35 of electroplating solution. One or more contacts 40 are provided to connect the wafer 30 to a plating power supply 45 as a cathode of an electroplating cell. An anode 50 is disposed in the bath 35 and is connected to the plating power supply 45. Preferably, a diffuser 55 is disposed between the anode 50 and the wafer/cathode 30. The wafer 30 may be rotated about axis 60 during the enhancement process. Anode 50 may be provided with a dielectric shield 65 at a backside thereof which faces an incoming stream of plating bath fluid.

As noted above, certain aspects of the present invention relate to new and useful plating solutions. These solutions can be used for blanket plating, full-fill of the recessed micro-structures, seed layer enhancement, etc. The preferred electrolytic bath solution for enhancing the seed layer is an alkaline copper bath in which copper ions are complexed with a complexing agent. A preferred composition and range of concentrations for the various components of the plating bath include the following:

1. Copper sulfate: 0.03M to 0.25M (preferably, 0.04);
2. Complexing agent: complex to metal ratios from 1 to 4, preferably 2;
3. Boric acid: 0.01M to 0.5M, preferably 0.05M; and

- 17 -

4. pH: 5 – 13, preferably 9.5.

A preferred source of copper ions is copper sulfate (CuSO_4). The concentration of copper sulfate in the bath is preferably within the range of 0.03 to 0.25 M, and is more preferably about 0.1 M.

Complexing agents that are suitable for use in the present invention form a stable complex with copper ions and prevent the precipitation of copper hydroxide. Ethylene diamine tetracetic acid (EDTA), ethylene diamine (ED), citric acid, and their salts have been found to be particularly suitable copper complexing agents. The molar ratio of complexing agent to copper sulfate in the bath is preferably within the range of 1 to 4, and is preferably about 2. Such complexing agents can be used alone, in combination with one another, or in combination with one or more further complexing agents.

The electrolytic bath is preferably maintained at a pH of at least 9.0.

Potassium hydroxide, ammonium hydroxide, tetramethylammonium hydroxide, or sodium hydroxide is utilized to adjust and maintain the pH at the desired level of 9.0 or above. A preferred pH for a citric acid or ED bath is about 9.5, while a preferred pH for an EDTA bath is about 12.5. As noted above, the complexing agent assists in preventing the copper from precipitating at the high pH level.

Additional components can be added to the alkaline copper bath. For example, boric acid (H_3BO_3) aids in maintaining the pH at 9.5 when citric acid or ED

- 18 -

is used as the complexing agent, and provides brighter copper deposits when added to an electrolytic bath containing EDTA as the complexing agent. If boric acid is added, its concentration in the bath is preferably within the range of 0.01 to 0.5 M.

In general, the temperature of the bath can be within the range of 20 to 35°C, with 25°C being a preferred temperature. The current density for electrolytically depositing copper to enhance the copper seed layer can be 1 to 5 milliamps/cm², while a plating time of about 1 to about 5 minutes is sufficient to enhance the copper seed layer. The plating waveform may be, for example, a forward periodic pulse having a period of 2 msec at a 50% duty cycle.

An amine free acid complexing agent, for example, a polycarboxylic acid, such as citric acid, and salts thereof, is preferable to the use of EDTA or ED. EDTA and ED include amine groups. These amine groups often remain on the surface of the semiconductor workpiece after rinsing and drying of the wafer. Subsequent processes, particularly such processes as photolithographic processes, may be corrupted by the reactions resulting from the presence of these amine groups. The amine groups may, for example, interfere with the chemical reactions associated with the exposing and/or curing of photoresist materials. As such, amine free complexing agents are particularly suitable in processes in which a photolithographic process follows an electrodeposition process.

A further advantage of using a polycarboxylic acid, such as citric acid, stems

- 19 -

from the fact that the magnitude of the voltage potential at which the copper is plated is greater than the magnitude of the voltage potential at which the copper is plated in a bath containing EDTA. This is illustrated in Figs. 4A and 4B where Fig. 4A is a current-potential graph for a citric acid bath, and Fig. 4B is a current-potential graph for an EDTA bath. Electroplating takes place at the voltage where the corresponding current increases abruptly. This plating voltage is referred to as the deposition potential, which is approximately -1.25 volts as shown in Fig. 4A for a bath employing citric acid as the complexing agent, and is approximately -1.0 volts as shown in Fig. 4B for a bath employing EDTA as the complexing agent. The current peaks (70 70' for the a bath containing a citric acid, and 72, 72' for the bath containing the EDTA) are the limiting currents which are mainly determined by mass transfer and the concentration of copper ions in the plating solutions. As illustrated, the magnitude of the current and the particular plating potential is slightly dependent on the substrate material. The different substrate results are illustrated in Figs. 4A and 4B, where 70 and 72 are the curves for a copper substrate material, and 70' and 72' are curves for a copper substrate material comprised of copper with a copper oxide coating. It is noted that additional peaks occur on oxidized copper in the same electrolytes. These peaks are related to the electrochemical reduction of copper oxide to metallic copper before the alkaline electrochemical copper deposition.

- 20 -

It is believed that a copper layer plated at a higher plating potential in an alkaline bath provides greater adhesion to the underlying barrier layer than a copper layer plated at a lower plating potential in an acid bath. For copper to adhere to the barrier material, it is thought that copper ions must impinge on the barrier surface with sufficient energy to penetrate a thin oxidized or contaminated layer at the barrier surface. It is therefore believed that a copper layer deposited at a higher magnitude plating potential adhere is better to the exposed barrier layer during the plating process when compared to a layer plated using a smaller magnitude plating potential. This factor, combined with the inter-copper chemical bond between the PVD copper and the electrochemically deposited copper provides for an enhanced seed layer having excellent electrical as well as barrier adhesion properties. Such characteristics are also desirable for films used in blanket plating, full-fill plating, pattern plating, etc.

It has been found that the resistivity of the deposited copper film is directly related to the resistivity of the plating bath solution. Additives that assist in lowering the resistivity of the solution therefore provide a corresponding reduction in the resistivity of the deposited film.

Experimental results indicate that addition of ammonium sulfate significantly reduces the resistivity of the plating bath solution and, as such, the deposited film. The sheet resistance obtained for different amounts of ammonium

- 21 -

sulfate are compared in the graph Fig. 4C. As can be seen, the highest sheet resistance, either with or without annealing at high temperatures, was obtained in the bath containing no ammonium sulfate. If ammonium hydroxide was used to adjust pH in which a trace amount of ammonium sulfate is introduced to the bath, the sheet resistance was reduced from 76 to 23. As the concentration of ammonium sulfate increased from 0.1 M to 0.5 M, the sheet resistance continuously decreased in a corresponding manner.

Although ammonium sulfate assists in reducing the sheet resistance of the deposited copper layer, experimental results indicate that it reduces the conformality of the resulting copper film. However, the addition of ethylene glycol to the ammonium sulfate containing solution substantially increases the conformality of the resulting deposit. Figure 4D illustrates the relationship between the concentration of ethylene glycol and the conductivity of a plating solution containing 0.2M the of ammonium sulfate.

A preferred composition and range of concentrations for the various components of a plating bath having ammonium sulfate include the following:

1. Copper sulfate: 0.03M to 0.5M (preferably, 0.25M);
2. Complexing agent: complex to metal ratios from 1 to 4, preferably 2 using ED;
3. Ammonium sulfate: 0.01M to 0.5M, preferably 0.3M; and
4. Boric acid: 0.00 to 0.5M, preferably 0.2M.

- 22 -

As noted above, such a bath composition can be used for blanket plating, pattern plating, full-fill plating, and seed layer enhancement.

With reference again to the specific seed layer enhanced aspects of the present invention, the enhanced seed layer of Fig. 2C is suitable for subsequent electrochemical copper deposition. This subsequent copper deposition may take place in an alkaline bath within the apparatus employed to enhance the seed layer. This may be followed by a low-temperature annealing process that assists in lowering the resistivity of the deposited copper. Such a low-temperature annealing process preferably takes place at a temperature below about the 250 degrees Celsius and, more preferably, below about 100 degrees Celsius. When a low-K dielectric material is employed to isolate the copper structures, the upper annealing temperature limit should be chosen to be below the degradation temperature of the dielectric material.

Although the foregoing alkaline bath compositions may be used for the entire electrochemical deposition process, subsequent copper deposition may take place in an acid environment where plating rates are substantially higher than corresponding rates associated with alkaline plating baths. To this end, the semiconductor workpiece is preferably transferred to an apparatus wherein the workpiece is thoroughly rinsed with deionized water and then transferred to an apparatus similar to that of Fig. 3 wherein the plating bath is acidic. For example, one suitable copper

- 23 -

bath comprises 170 g/l H_2SO_4 , 17 g/l copper and 70 ppm Chloride ions with organic additives. The organic additives are not absolutely necessary to the plating reaction. Rather, the organic additives may be used to produce desired film characteristics and provide better filling of the recessed structures on the wafer surface. The organic additives may include levelers, brighteners, wetting agents and ductility enhancers. It is during this deposition process that the trench 5 is substantially filled with a further layer of electrochemically deposited copper 22. The resulting filled cross-section is illustrated in Fig. 2D. After being filled in this manner, the barrier layer and the copper layers disposed above the trench are removed using any suitable process thereby leaving only the trench 5 with the copper metallization and associated barrier material as shown in Fig. 2E.

Use of an alkaline electrolytic bath to enhance the copper seed layer has particular advantages over utilizing acid copper baths without seed layer enhancement. After deposition of the PVD copper seed layer, the copper seed layer is typically exposed to an oxygen-containing environment. Oxygen readily converts metallic copper to copper oxide. If an acid copper bath is used to plate copper onto the seed layer after exposure of the seed layer to an oxygen containing environment, the acid copper bath would dissolve copper oxide that had formed, resulting in voids in the seed layer and poor uniformity of the copper layer deposited on the seed layer.

Use of an alkaline copper bath in accordance with the disclosed embodiment avoids

- 24 -

the problem by advantageously reducing any copper oxide at the surface of the seed layer to metallic copper. Another advantage of the alkaline copper bath is that the plated copper has much better adhesion to the barrier layer than that plated from an acid copper bath. Additional advantages of the seed layer enhancement aspects of the present invention can be seen from the following Example.

EXAMPLE 1

Comparison of Acid Copper Plating With and Without Seed Layer Enhancement

Semiconductor wafers 1, 2 and 3 were each coated with a 200 Angstrom PVD copper seed layer. In accordance with the present invention, wafers 1 and 2 had seed layer enhancement from citric acid and EDTA baths, respectively, the compositions of which are set forth below:

Bath for Wafer 1: 0.1 M Cu SO_4 + 0.2 M Citric acid + 0.05 M H_3BO_3 in D.I. water at pH 9.5, temperature 25°C.

Bath for Wafer 2: 0.1 M Cu SO_4 + 0.2 M EDTA acid + 0.05 H_3BO_3 in D.I. water at pH 12.5, temperature 25°C.

Wafer 3 did not have any seed layer enhancement.

The three wafers were then plated with a 1.5 micron copper layer from an acid copper bath under identical conditions. The following Table compares the

- 25 -

uniformities, as deduced from sheet resistance measurements, of the three wafers after the deposition of a copper layer having a nominal thickness of 1.5 microns.

TABLE 1

<u>Wafer</u>	<u>Enhancement Bath</u>	<u>Current Density</u>	<u>Non-uniformity Standard deviation (%, 1σ)</u>
1	Citrate	3 min. 2mA/cm ²	at 7.321
2	EDTA	3 min. 2mA/cm ²	at 6.233
3	None	0	46.10

As can be seen from the results in Table 1 above, seed layer enhancement in accordance with the disclosed process provides excellent uniformity (6 to 7%) compared to that without seed layer enhancement (46%). This is consistent with observations during visual examination of the wafer after 1.5 micron electroplated copper had been deposited. Such visual examination of the wafer revealed the presence of defects at wafer electrode contact points on the wafer without seed layer enhancement.

Figs. 5, 6A and 6B are photographs taken using a SEM. In Fig. 5, an ultra-thin seed layer has been deposited on the surface of a semiconductor wafer, including micro-structures, such as trenches 85. As shown, void regions are present at the lower corners of the trenches. In Fig. 6A, the seed layer has been enhanced in

- 26 -

the manner described above in a bath containing citric acid as the complexing agent. This enhancement resulted in a conformal copper seed layer that is very suited for subsequent electrochemical deposition of copper metallization.

Fig. 6B illustrates a seed layer that has been enhanced in a bath containing EDTA as the complexing agent. The resulting seed layer includes larger grain sizes that project as spikes from the sidewalls of the trenches. These sidewall grain projections make subsequent electrochemical deposition filling of the trenches more difficult since they localize a higher plating rate resulting in non-uniformity of the subsequent electrochemical deposition. This effect is particularly noticeable in recessed micro-structures having small dimensions. As such, a complexing agent such as citric acid is more preferable when filling small micro-structures. Results comparable for copper baths containing citric acid have also been achieved using ED as the complexing agent.

Fig. 7 is a schematic representation of a section of a semiconductor manufacturing line 90 suitable for implementing the foregoing processes. The line 90 includes a vapor deposition tool or tool set 95 and an electrochemical copper deposition tool or tool set 100. Transfer of wafers between the tools/tool sets 95 and 100 may be implemented manually or through an automated transfer mechanism 105. Preferably, automated transfer mechanism 105 transfers workpieces in a pod or similar environment. Alternatively, the transfer mechanism 105 may transfer wafers

- 27 -

individually or in an open carrier through a clean atmosphere joining the tools/tool sets.

In operation, vapor deposition tool/tool set 95 is utilized to apply an ultra-thin copper seed layer over at least portions of semiconductor workpieces that are processed on line 90. Preferably, this is done using a PVD application process. Workpieces with the ultra-thin seed layer are then transferred to tool/tool set 100, either individually or in batches, where they are subject to electrochemical seed layer enhancement at, for example, processing station 110. Processing station 110 may be constructed in the manner set forth in Fig. 3. After enhancement is completed, the workpieces are subject to a full electrochemical deposition process in which copper metallization is applied to the workpiece to a desired interconnect metallization thickness. This latter process may take place at station 110, but preferably occurs at further processing station 115 which deposits the copper metallization in the presence of an acidic plating bath. Before transfer to station 115, the workpiece is preferably rinsed in DI water at station 112. Transfer of the wafers between stations 110, 112, and 115 may be automated by a wafer conveying system 120. The electrochemical deposition tool set 100 may be implemented using, for example, an LT-210TM model or an EquinoxTM model plating tool available from Semitool, Inc., of Kalispell, MT.

Numerous modifications may be made to the foregoing system without

- 28 -

departing from the basic teachings thereof. Although the present invention has been described in substantial detail with reference to one or more specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the scope and spirit of the invention as set forth in the appended claims.

- 29 -



CLAIMS

1. A process for applying a metal structure to a workpiece comprising the step of electroplating a copper layer onto a surface of the workpiece using an electroplating bath comprising copper sulfate, ammonium sulfate, a complexing agent, and ethylene glycol.
2. A process as set forth in claim 1 wherein the electroplating bath further comprises boric acid.
3. A process as set forth in claim 2 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.
4. A process for applying a metal structure to a workpiece comprising the step of electroplating a copper layer onto a surface of the workpiece using an electroplating bath comprising copper sulfate, boric acid, and a complexing agent.
5. A process as set forth in claim 4 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

- 30 -



6. A process as set forth in claim 4 wherein the complexing agent is citric acid.
7. A process for applying a metallization interconnect structure to a workpiece, the workpiece including a barrier layer deposited on a surface thereof, the process comprising the steps of:
 - (a) forming an ultra-thin metal seed layer on the barrier layer, the seed layer having a thickness of less than or equal to about 500 Angstroms;
 - (b) enhancing the ultra-thin seed layer by depositing additional metal to provide an enhanced seed layer, the enhanced seed layer having a thickness at all points on sidewalls of substantially all recessed features distributed within the workpiece that is equal to or greater than about 10% of the nominal seed layer thickness over an exteriorly disposed surface of the workpiece.
8. The process of claim 7 wherein the additional metal is copper.
9. The process of claim 7 wherein the ultra-thin seed layer is enhanced by a process comprising an electrochemical deposition step.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



- 31 -

This Sheet Has Been Replaced



10. The process of claim 9 wherein the electrochemical deposition step occurs in an alkaline bath.
11. The process of claim 10 wherein the alkaline bath comprises metal ions and an agent effective in complexing the metal ions.
12. The process of claim 7 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.
13. The process of claim 7 wherein the ultra-thin metal seed layer formed in step (a) has a thickness of about 50 to about 500 Angstroms.
14. The process of claim 13 wherein the ultra-thin metal layer formed in step (a) has a thickness of about 100 to about 250 Angstroms.
15. The process of claim 7 wherein the complexing agent is comprised of one or more complexing agents selected from EDTA, ED, and polycarboxylic acid.
16. The process of claim 11 wherein the complexing agent is comprised of EDTA and the EDTA in the bath has a concentration within the range of 0.03 to 1.0 M.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



- 32 -



17. The process of claim 15 wherein the complexing agent is comprised of ED and wherein the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
18. The process of claim 16 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.
19. The process of claim 15 wherein the complexing agent is comprised of citric acid and the citric acid in the bath has a concentration within the range of 0.03 to 1.0 M.
20. The process of claim 10 and further comprising the step of subjecting the workpiece to a further electrochemical deposition process in an acidic electrolytic solution to complete deposition of the metal to a thickness needed for the formation of the interconnect structure.
21. The process of claim 20 and further comprising the step of subjecting the workpiece to a rinsing process after electrochemical deposition in the outline bath and prior to the further electrochemical copper deposition process in an acidic electrolytic solution.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



- 33 -



22. In a manufacturing line including a plurality of apparatus for the manufacture of integrated circuits, one or more apparatus of the plurality of apparatus being used for applying a copper metallization interconnect structure to a surface of a workpiece used to form the integrated circuits, the one or more apparatus comprising:

means for applying a conductive ultra-thin seed layer to a surface of the workpiece;
means for electrochemically enhancing the conductive ultra-thin seed layer to render it suitable for subsequent electrochemical application of the copper interconnect metallization to a predetermined thickness representing a bulk portion of the copper interconnect metallization structure.

23. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece.

24. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a PVD process.

THIS SHEET HAS BEEN
REPLACED



25. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a CVD process.
26. One or more apparatus as claimed in claim 23 wherein the means for electrochemically enhancing the conductive ultra-thin seed layer is further defined by means for electrochemically enhancing the conductive ultra-thin seed layer by electrochemically depositing copper using an alkaline copper bath having a complexing agent.
27. One or more apparatus as claimed in claim 26 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is at least about or greater than 1.1 volts.
28. One or more apparatus as claimed in claim 26 wherein the alkaline bath has a pH > or equal to about 9.0.
29. One or more apparatus as claimed in claim 26 wherein the complexing agent is comprised of EDTA.

This Sheet Has Been Replaced



- 35 -



30. One or more apparatus as claimed in claim 26 wherein the complexing agent is comprised of ED.
31. One or more apparatus as claimed in claim 26 wherein the complexing agent is a comprised of a carboxylic acid or salt thereof.
32. One or more apparatus as claimed in claim 31 wherein the complexing agent is citric acid or salt thereof.
33. One or more apparatus as claimed in claim 26 and further comprising means for electrochemically adding a further layer of copper over the conductive ultra-thin seed layer by electrochemically depositing copper using an acidic copper bath.
34. One or more apparatus as claimed in claim 33 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is greater than the magnitude of the plating voltage in the acidic copper bath.

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



35. One or more apparatus as claimed in claim 34 and further comprising means for rinsing the workpiece prior to its introduction to the means for electrochemically adding a further layer of copper.

36. A process for applying a metallization interconnect structure to a workpiece, the workpiece including a barrier layer deposited on a surface thereof, the process comprising the steps of:

- (a) forming an ultra-thin metal seed layer on the barrier layer, the seed layer having a thickness of less than or equal to about 500 Angstroms;
- (b) subjecting the workpiece to an electrochemical copper deposition process in an alkaline electrolytic bath having copper ions complexed with a complexing agent such that additional copper is deposited on the ultra-thin copper seed layer to thereby enhance the seed layer.

37. The process of claim 36 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.

38. The process of claim 36 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 50 to about 500 Angstroms.

THIS SHEET HAS BEEN
REPLACED



39. The process of claim 38 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 100 to about 250 Angstroms.
40. The process of claim 39 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 200 Angstroms.
41. The process of claim 36 wherein the alkaline electrolytic bath has a pH of at least 9.0.
42. The process of claim 36 wherein the copper ions in the electrolytic bath are provided by copper sulfate.
43. The process of claim 42 wherein the copper sulfate in the electrolytic bath has a concentration within the range of 0.03 to 0.25 M.
44. The process of claim 42 wherein the concentration of copper sulfate is about 0.1 M.
45. The process of claim 36 wherein the copper complexing agent is comprised of a copper complexing agent selected from EDTA, ED, and citric acid.

This Sheet Has Been Replaced



- 38 -



* C L M S *

46. The process of claim 45 wherein the complexing agent is comprised of EDTA and the EDTA in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
47. The process of claim 45 wherein the complexing agent is comprised of ED and the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
48. The process of claim 45 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.
49. The process of claim 45 wherein the complexing agent is comprised of citric acid and the citric acid in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
50. The process of claim 49 wherein the citric acid has a concentration within the range of 0.1 to 0.4 M.
51. The process of claim 36 and further comprising the step of subjecting the workpiece to a further electrochemical copper deposition process in an acidic

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



- 39 -



electrolytic solution to complete deposition of the copper to a thickness needed for the formation of the copper interconnect structure.

52. The process of claim 51 and further comprising the step of subjecting the workpiece to a rinsing process after step (b) and prior to the further electrochemical copper deposition process in an acidic electrolytic solution.

53. A workpiece comprising:

a plurality of the recessed structures distributed in a face of the workpiece;


an enhanced seed layer having a thickness at all points on sidewalls of substantially all recessed features distributed within the workpiece that is equal to or greater than about 10% of the nominal seed layer thickness over an exteriorly disposed surface of the workpiece.

54. A workpiece as claimed in claim 54 wherein the thickness of the sidewalls of substantially all recessed features is equal to or greater than about 20%.

55. A solution for electroplating copper, the solution comprising copper sulfate, ammonium sulfate, and ethylene glycol.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



- 40 -



* C L H S *

56. The solution of claim 55 and further comprising a complexing agent.

57. A solution for electroplating copper, the solution comprising copper sulfate, boric acid, and a complexing agent.

58. The solution of claim 57 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

59. The solution of claim 57 wherein the complexing agent is citric acid.

THIS SHEET HAS BEEN
REPLACED

Fig. 1

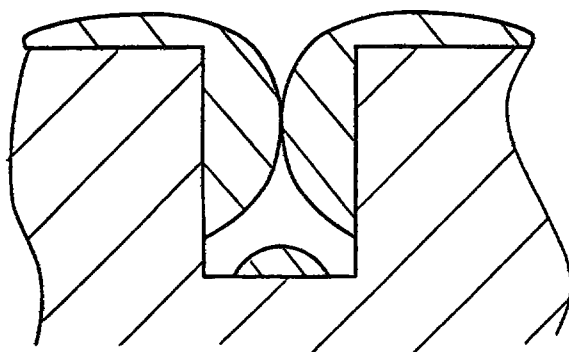


Fig. 2A

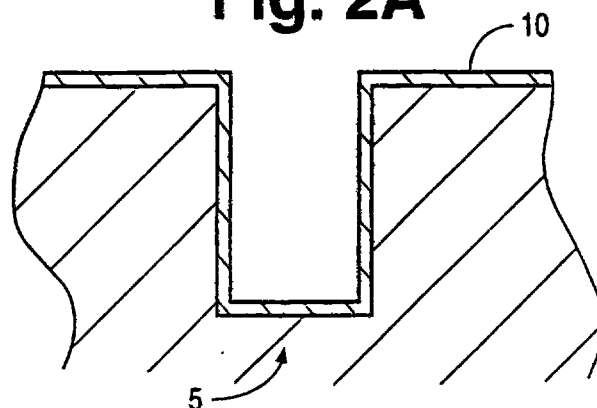


Fig. 2B

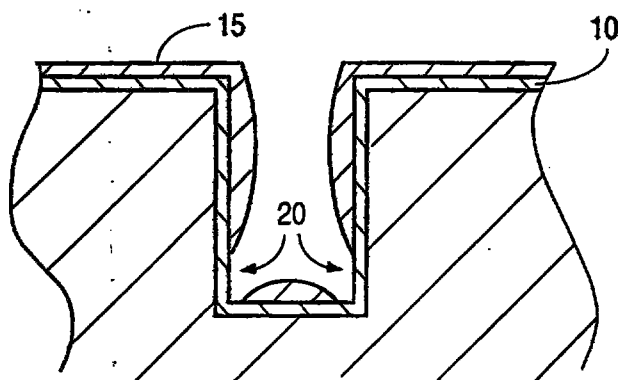


Fig. 2C

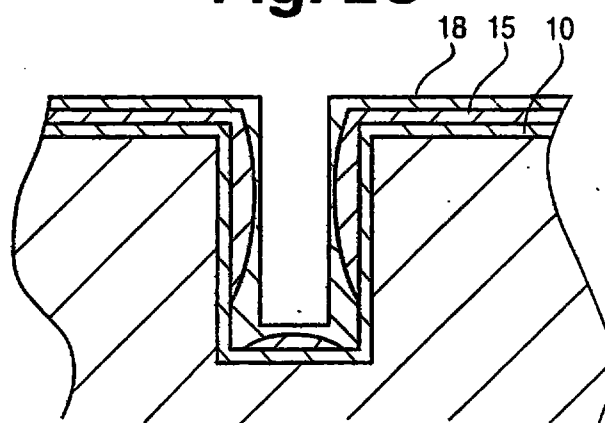


Fig. 2D



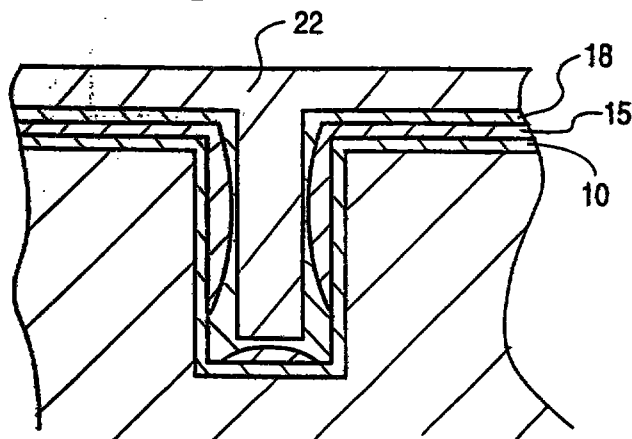



Fig. 2E

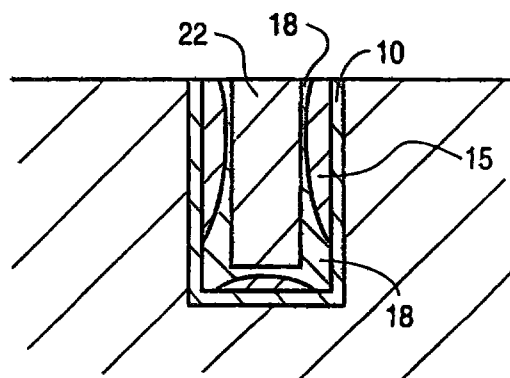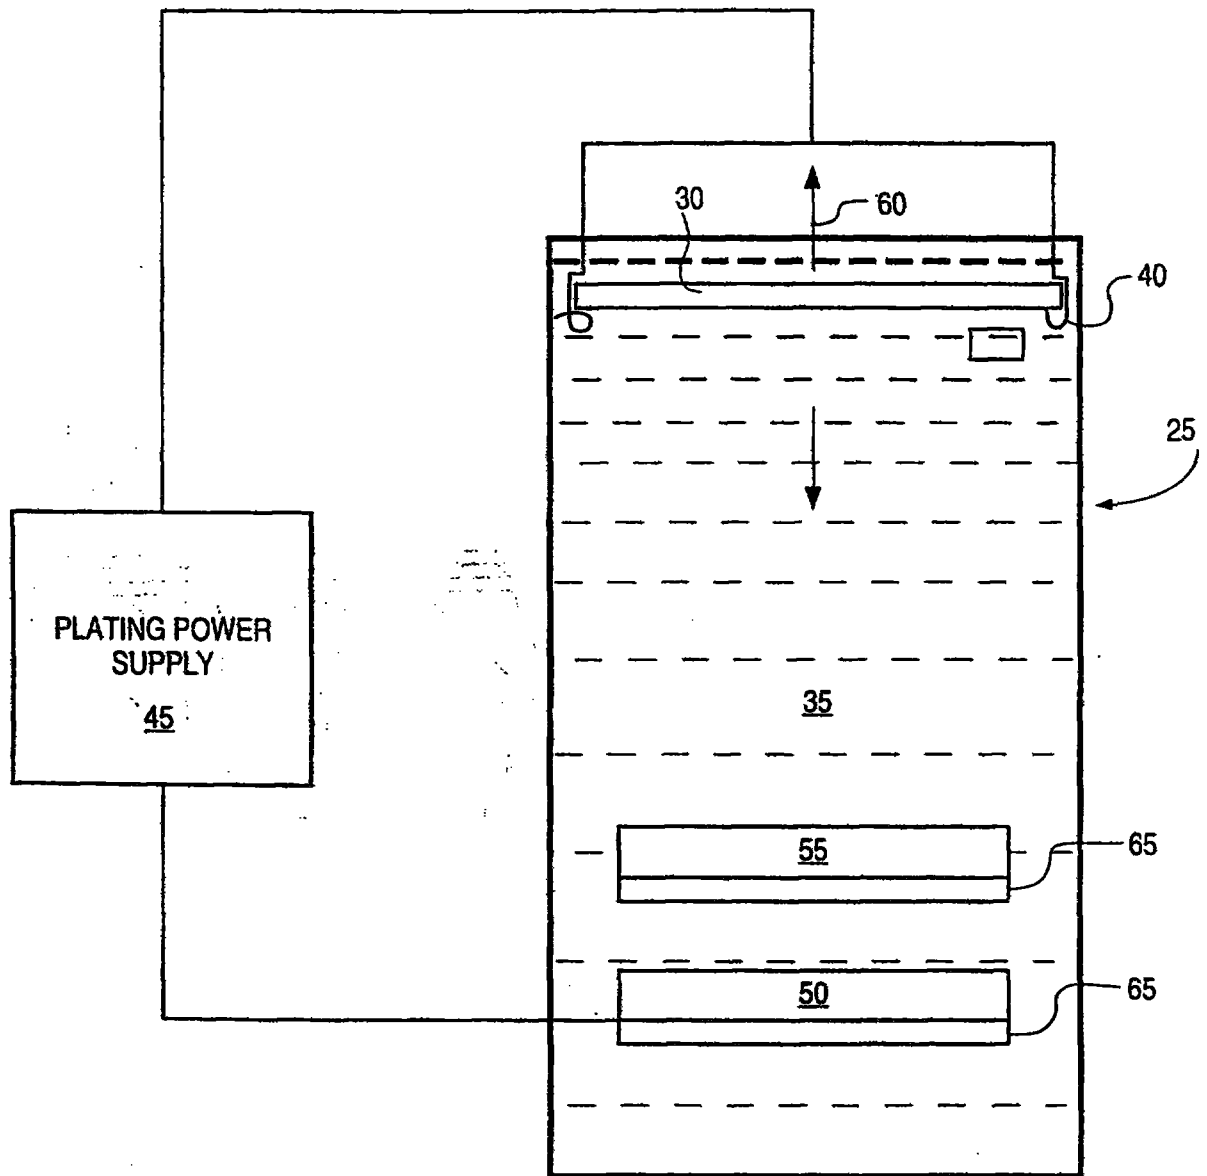


2/10

Fig. 3


3/10

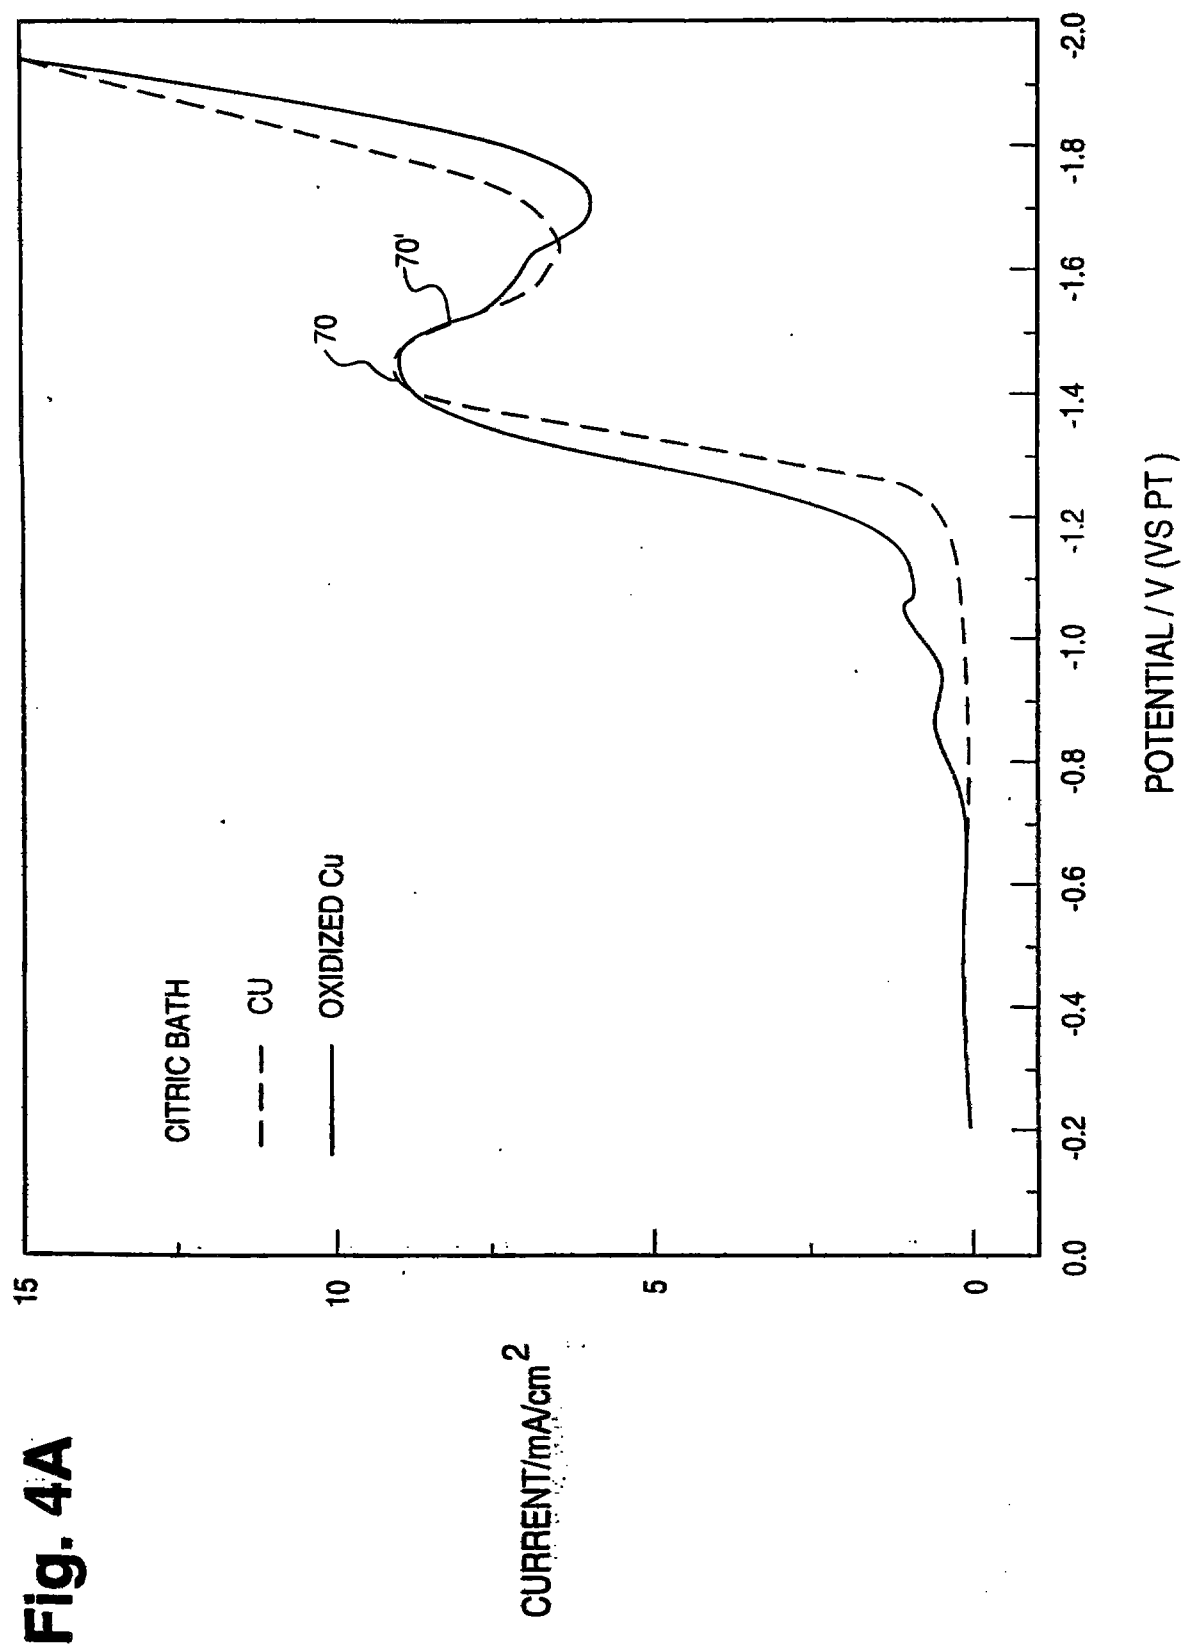


4/10

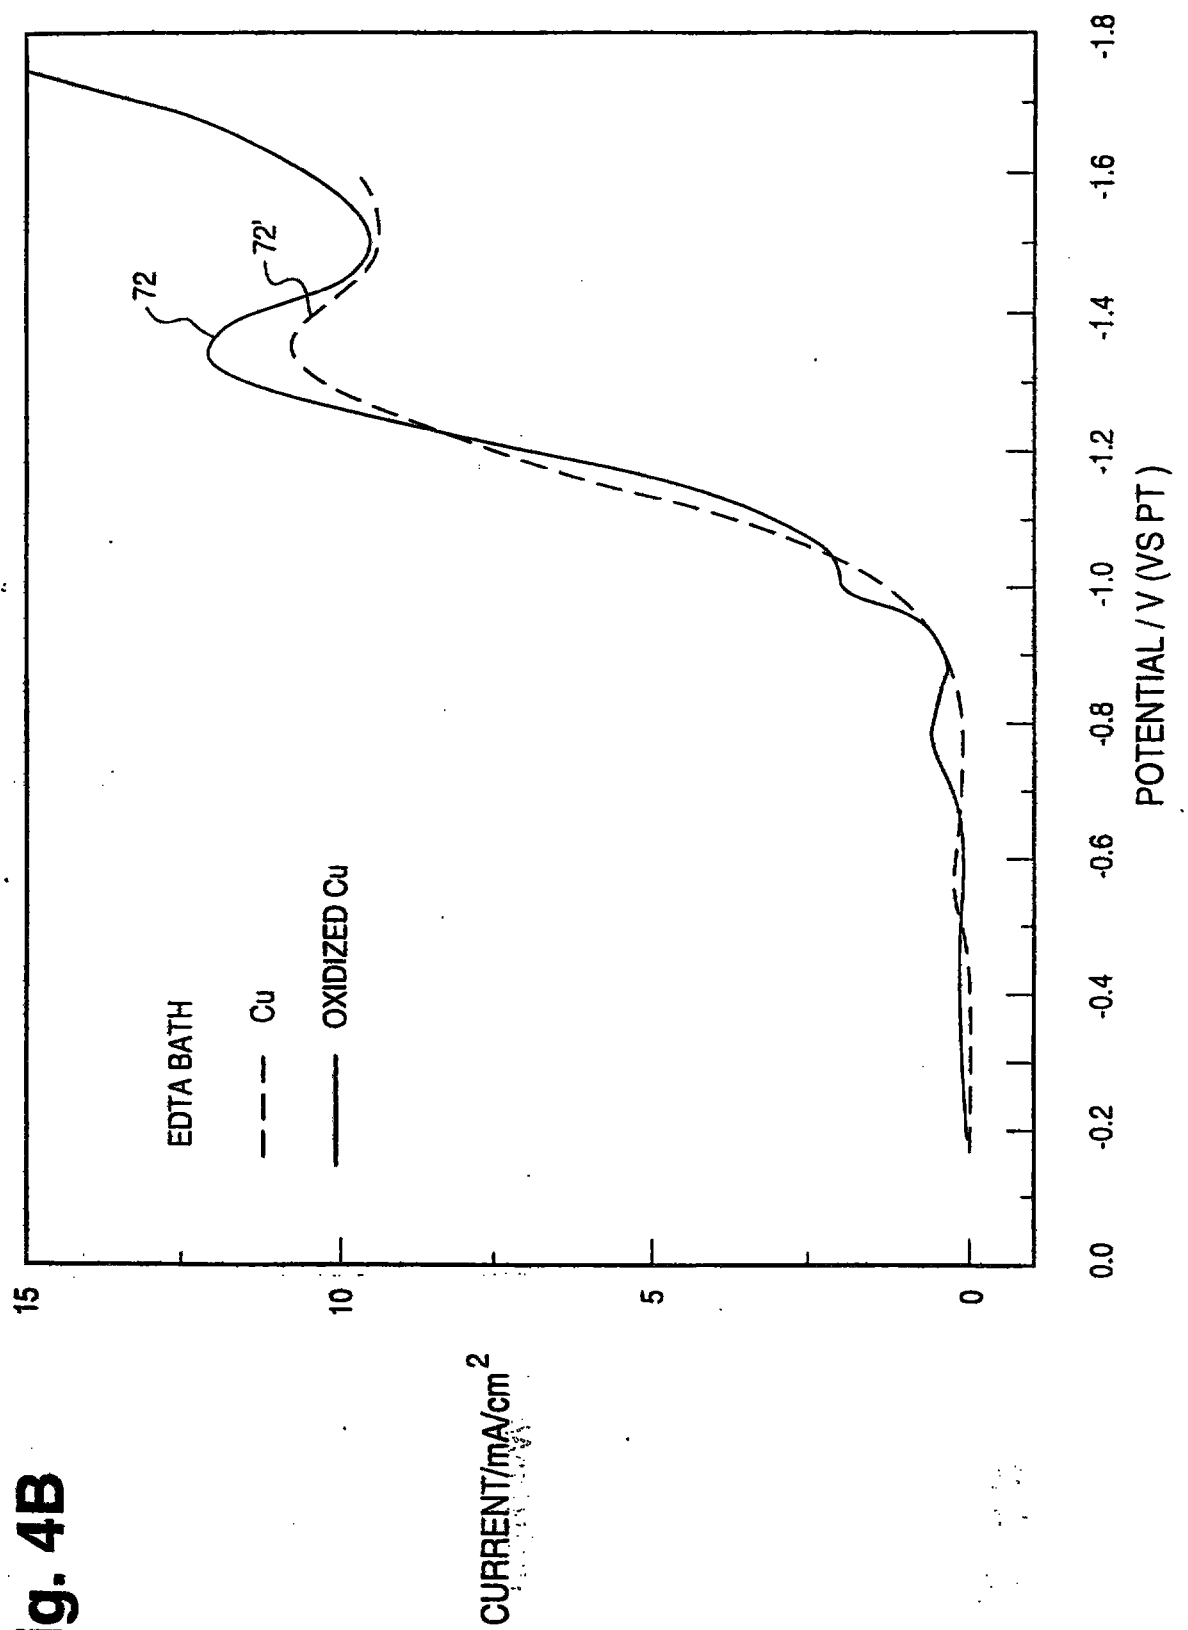

5/10

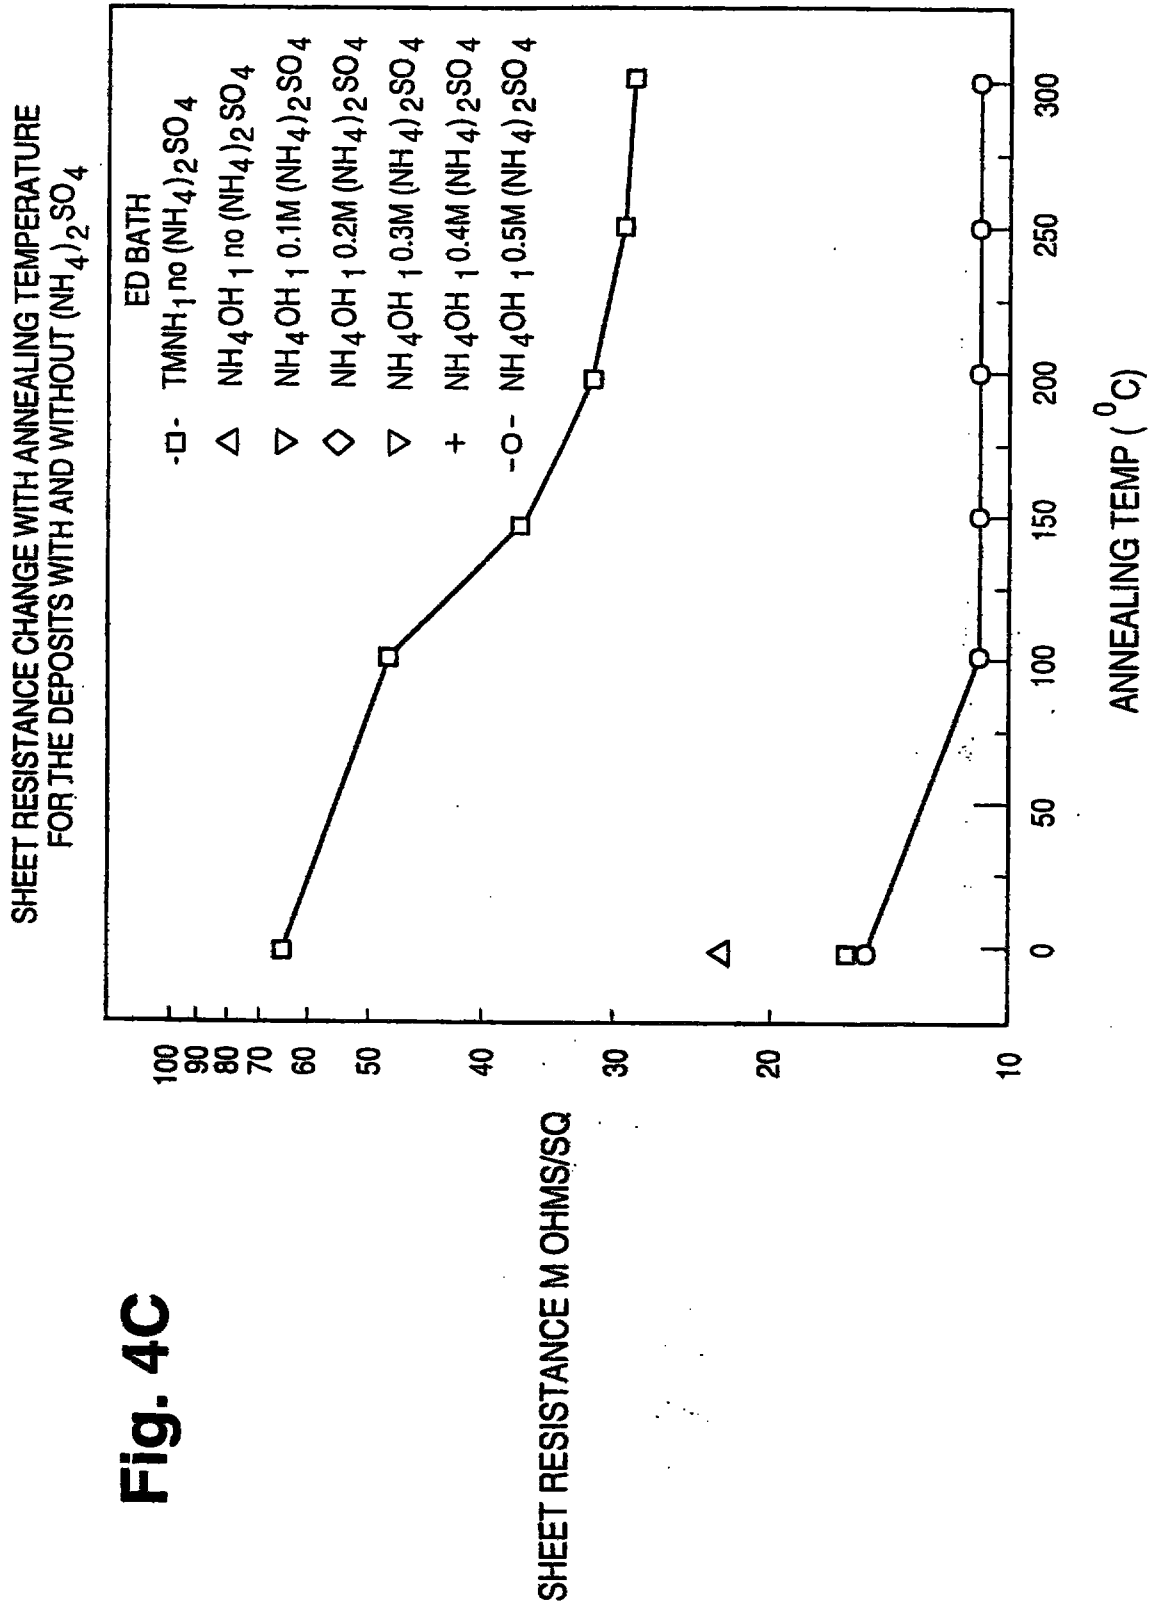

6/10

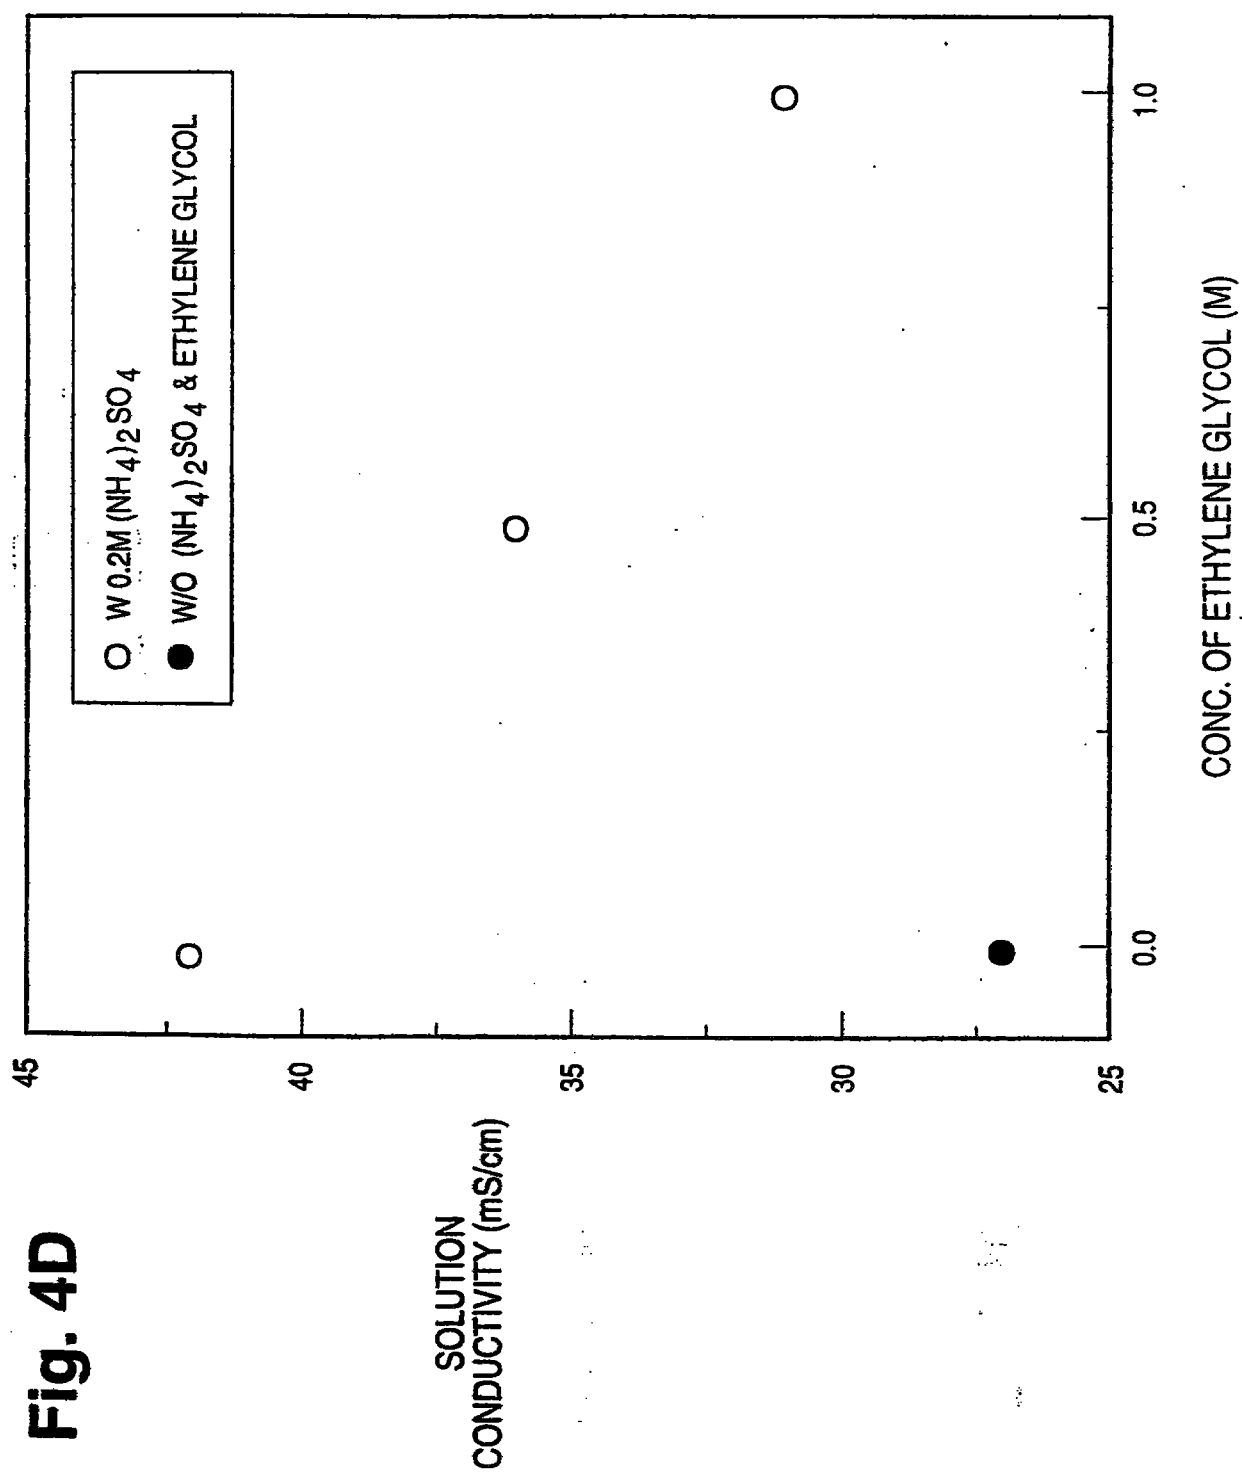

7/10

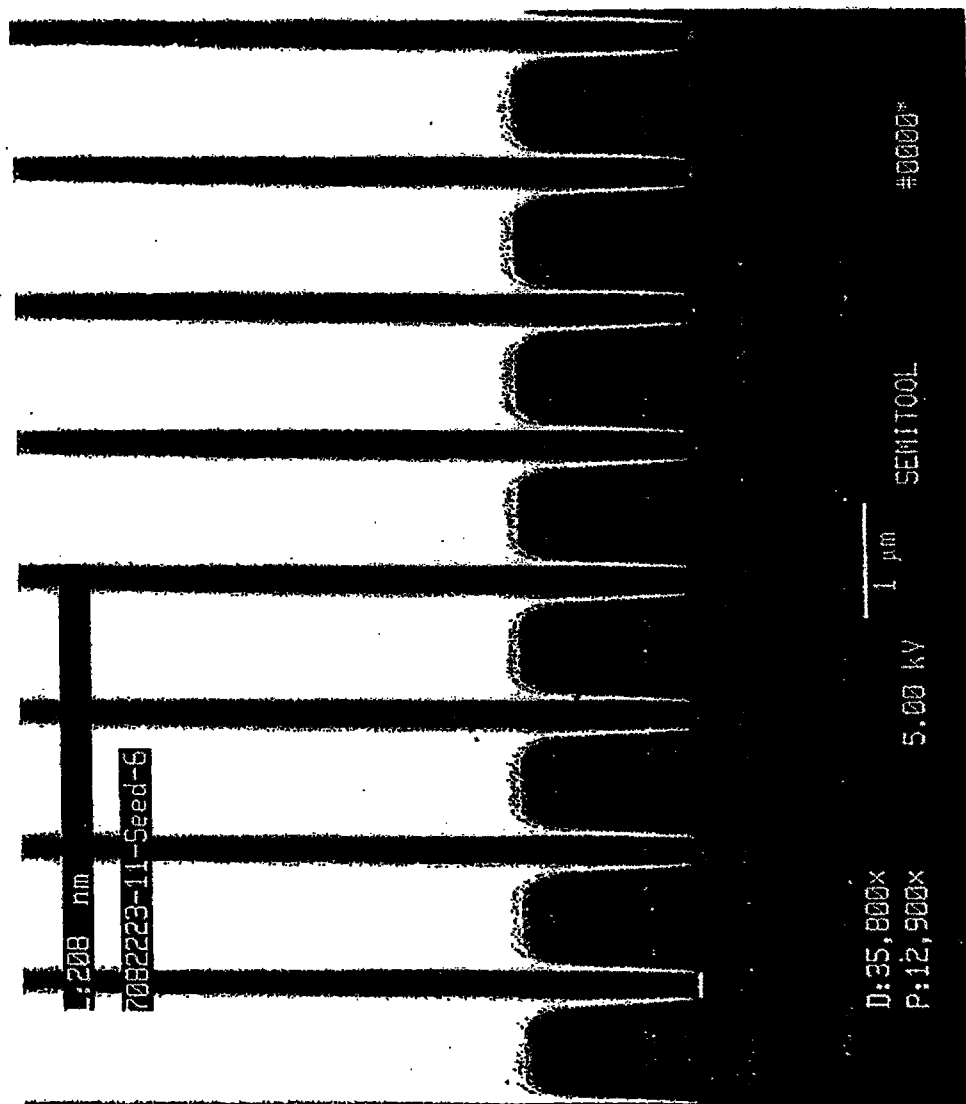


Fig. 5

8/10



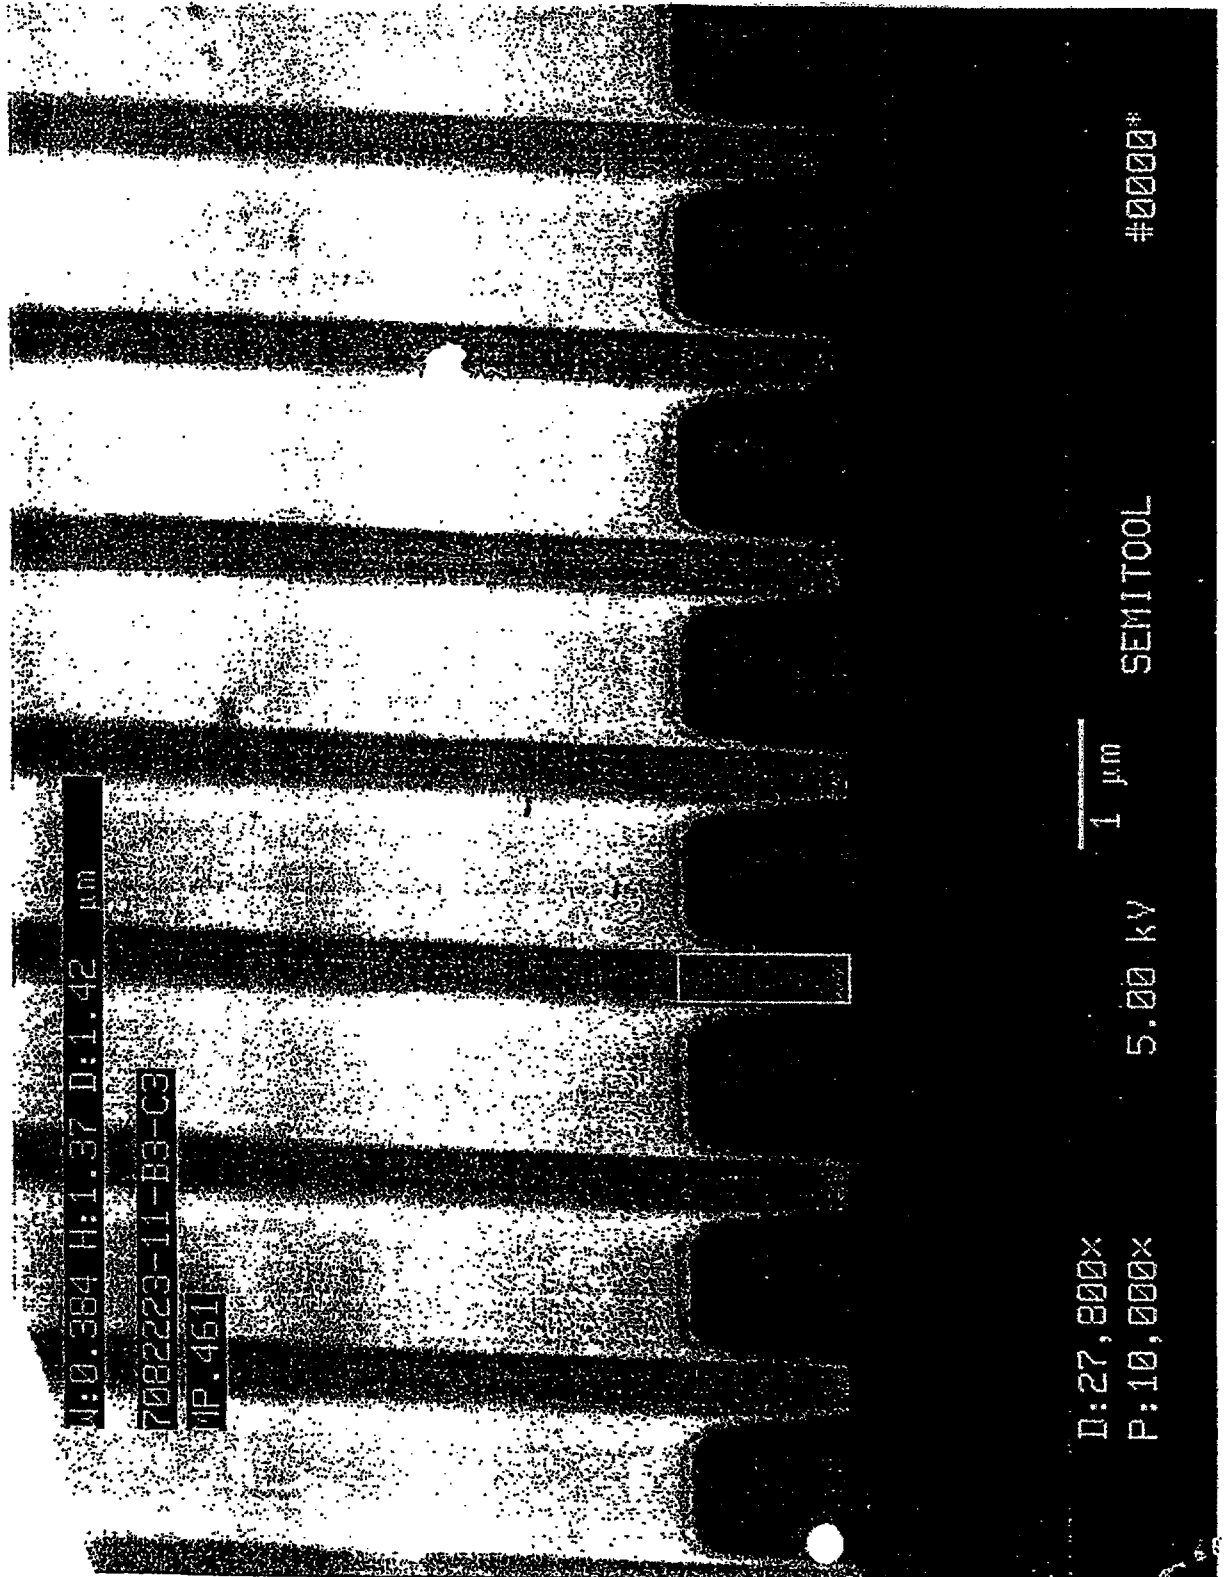


Fig. 6A

9/10

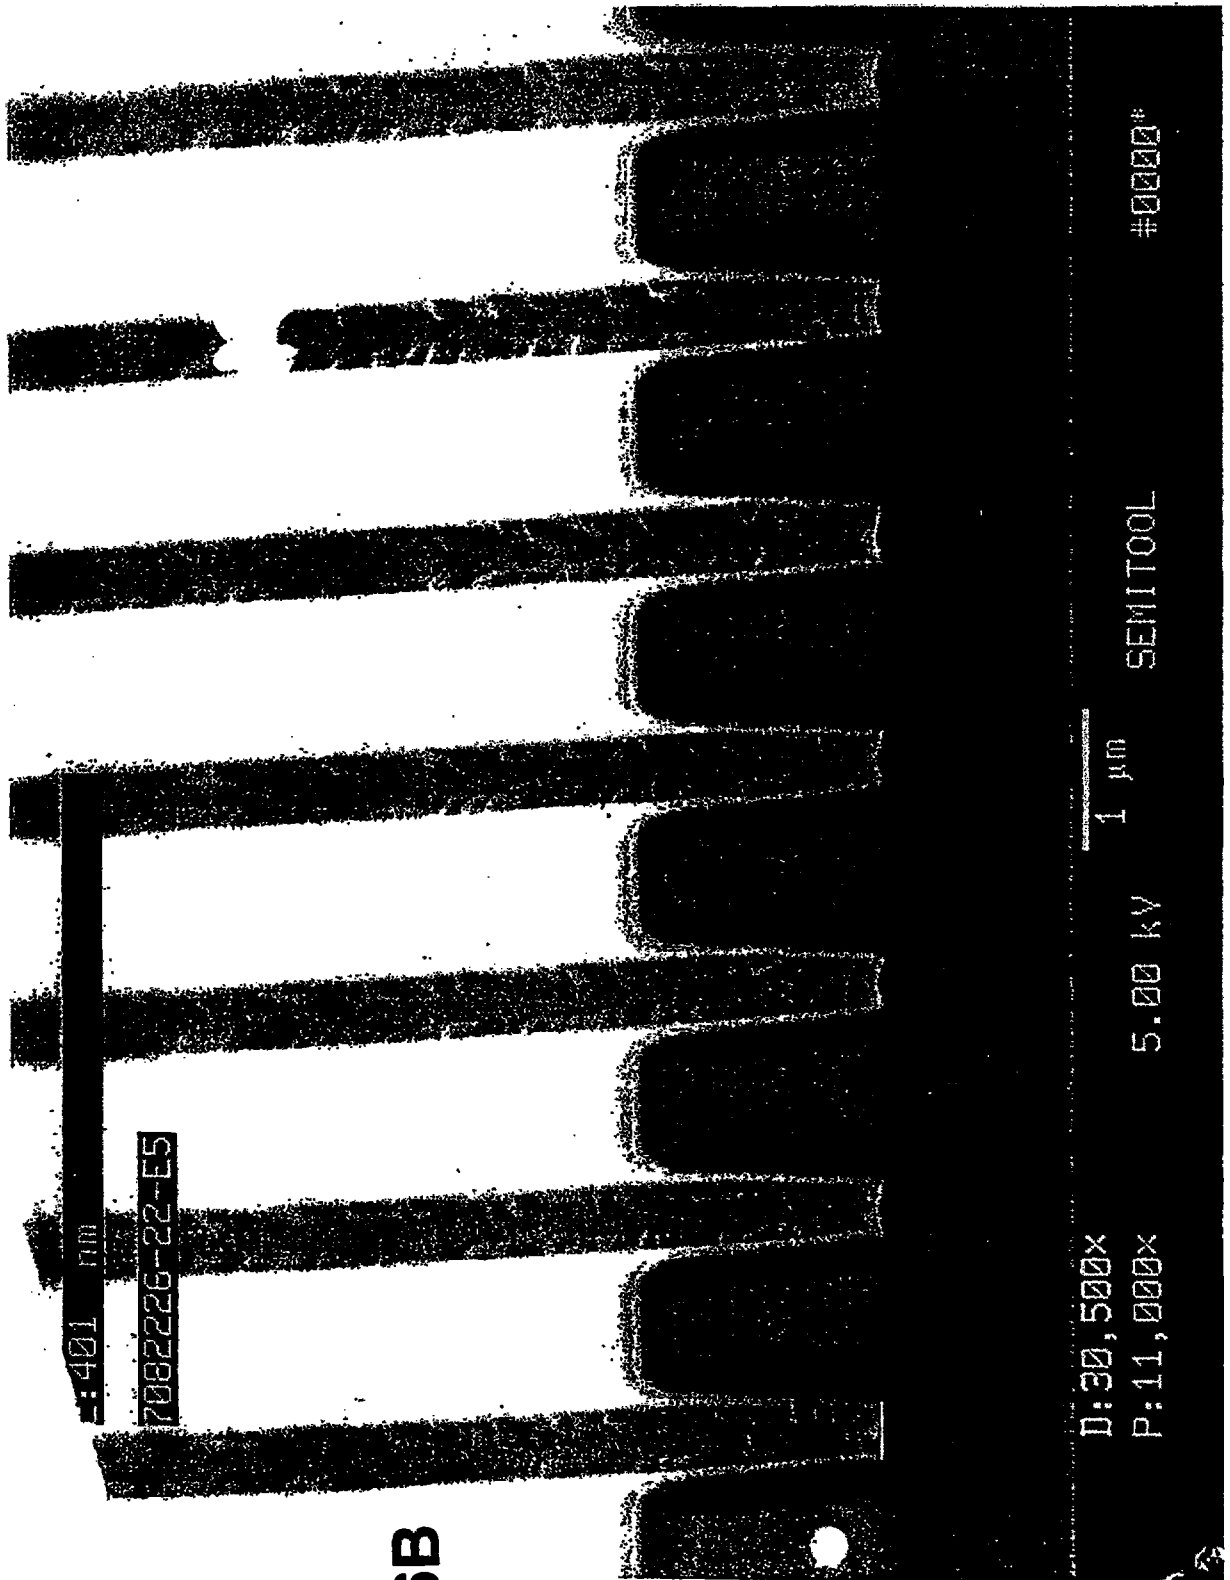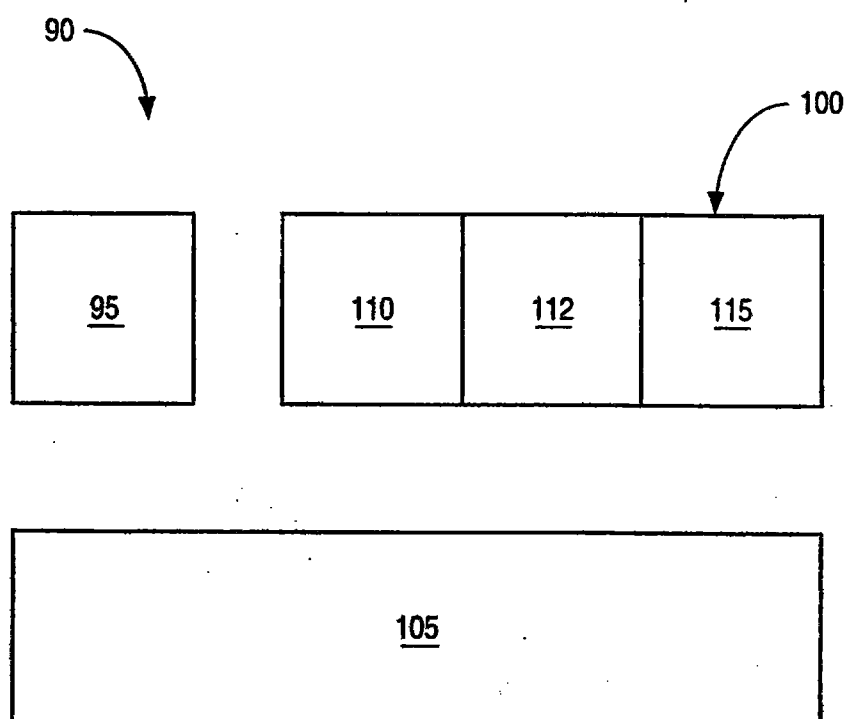

10/10

Fig. 7



PCT/US 99/06301
IPEA/US 17 APR 20

29

CLAIMS

1. A process for applying a metal structure to a workpiece on which one or more microelectronic devices are to be formed comprising the steps of :
providing an alkaline electroplating bath comprising copper sulfate in an amount sufficient to constitute copper as a principal metal species during subsequent electroplating, an ammonium hydroxide in an amount sufficient to raise the pH of the alkaline electroplating bath to at least 9.0, boric acid in an amount sufficient to stabilize the pH of the alkaline electroplating bath, and a complexing agent;
providing a workpiece on which one or more microelectronic devices are to be formed;
immersing at least one surface of the workpiece into the electroplating bath;
providing electroplating power between the at least one surface of the workpiece and an anode disposed in electrical contact with the electroplating bath to thereby electroplate a metal that principally comprises copper onto the least one surface of the workpiece using the electroplating bath.
2. [CANCELED]
3. A process as set forth in claim 0 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

AMENDED SHEET

This Sheet Has Been Replaced





PCT/US 99/063

IP/EA/US 17 APR 20

30

4. A process for applying a metal structure to a workpiece on which one or more microelectronic devices are to be formed comprising the steps of:
providing an alkaline electroplating bath comprising copper sulfate in an amount sufficient to constitute copper as a principal metal species during subsequent electroplating, an amount of boric acid sufficient to stabilize the pH of the alkaline electroplating bath at a pH of at least 9.0, and a complexing agent in an amount sufficient to prevent precipitation of copper hydroxide from the electroplating bath;
providing a workpiece on which one or more microelectronic devices are to be formed;
providing electroplating power between the at least one surface of the workpiece and an anode disposed in electrical contact with the electroplating bath to thereby electroplate a metal that principally comprises copper onto the at least one surface of the workpiece.
5. A process as set forth in claim 4 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.
6. A process as set forth in claim 4 wherein the complexing agent is citric acid.
7. A process for applying a metal to a workpiece, the workpiece including an exteriorly disposed surface having a plurality of micro-recessed structures that are defined by sidewalls, the workpiece further including a barrier layer deposited on at

This Sheet Has Been Replaced



AMENDED SHEET



PCT/US 99/063
IP/US 17 APR 2

31

least a portion of the exteriorly disposed surface of the workpiece and on at least substantial portions of the walls of the plurality of micro-recessed structures, the process comprising the steps of:

- (a) forming an ultra-thin metal seed layer exterior to the barrier layer using a first deposition process, the seed layer having a thickness that renders it generally unsuitable for bulk-fill electroplating of a metal thereon;
- (b) enhancing the ultra-thin seed layer by depositing an additional metal using a second deposition process that is different from the first deposition process to provide an enhanced seed layer, the enhanced seed layer having a thickness at all points on sidewalls of substantially all micro-recessed structures distributed within the workpiece that renders the enhanced seed layer suitable for a subsequent bulk-fill electroplating process.

- 8. The process of claim 7 wherein the additional metal is copper.
- 9. The process of claim 7 wherein the ultra-thin seed layer is enhanced by a process comprising an electroplating step.
- 10. The process of claim 9 wherein the electroplating step occurs in an alkaline bath.

This Sheet Has Been Replaced



AMENDED SHEET



PCT/US 99/063

IPRAUS 17 APR

32

11. The process of claim 10 wherein the alkaline bath comprises metal ions and an agent effective in complexing the metal ions.
12. The process of claim 7 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.
13. The process of claim 7 wherein the ultra-thin metal seed layer formed in step (a) has a thickness of about 50 to about 500 Angstroms.
14. The process of claim 13 wherein the ultra-thin metal layer formed in step (a) has a thickness of about 100 to about 250 Angstroms.
15. The process of claim 10 wherein the alkaline bath comprises a complexing agent that is comprised of one or more complexing agents selected from EDTA, ED, and polycarboxylic acid.
16. The process of claim 11 wherein the complexing agent is comprised of EDTA and the EDTA in the bath has a concentration within the range of 0.03 to 1.0 M.
17. The process of claim 15 wherein the complexing agent is comprised of ED and wherein the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.

This Sheet Has Been Replaced



AMENDED SHEET



PCT/US 99/0630
IPEA/US 17 APR 200

33

18. The process of claim 16 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.
19. The process of claim 15 wherein the complexing agent is comprised of citric acid and the citric acid in the bath has a concentration within the range of 0.03 to 1.0 M.
20. The process of claim 10 and further comprising the step of subjecting the workpiece to a bulk-fill electroplating process in an acidic bath.
21. The process of claim 20 and further comprising the step of subjecting the workpiece to a rinsing process after electroplating in the alkaline electroplating bath and prior to the bulk-fill electroplating process in the acidic electroplating bath.
22. In a manufacturing line including a plurality of apparatus for the manufacture of micro-sized metal structures on a workpiece, one or more apparatus of the plurality of apparatus being used for applying metal to a surface of the workpiece, the one or more apparatus comprising:
means for applying a conductive ultra-thin seed layer to a surface of the workpiece using a first deposition process, the ultra-thin seed layer having a nominal

AMENDED SHEET

This Sheet Has Been Replaced





PCT/US 99/0630
IPEA/US 17 APR 20

34

thickness that is generally unsuitable for the bulk electroplating a further metal thereon;

means for electrochemically enhancing the conductive ultra-thin seed layer using a second deposition process that differs from the first deposition process to thereby provide an enhanced seed layer having a thickness that is suitable for subsequent bulk electroplating of the metal to a predetermined thickness representing a bulk portion of the micro-sized metal structure.

23. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece.
24. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a PVD process.
25. One or more apparatus as claimed in claim 22 wherein the means for applying is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a CVD process.
26. One or more apparatus as claimed in claim 23 wherein the means for electrochemically enhancing the conductive ultra-thin seed layer is further defined

AMENDED SHEET

This Sheet Has Been Replaced





PCT/US 99/0631

35

PEA/US 17 APR 2

by means for electrochemically enhancing the conductive ultra-thin seed layer by electroplating copper using an alkaline copper bath having a complexing agent.

27. One or more apparatus as claimed in claim 26 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is at least about or greater than 1.1 volts.
28. One or more apparatus as claimed in claim 26 wherein the alkaline bath has a pH > or equal to about 9.0.
29. One or more apparatus as claimed in claim 26 wherein the complexing agent is comprised of EDTA.
30. One or more apparatus as claimed in claim 26 wherein the complexing agent is comprised of ED.
31. One or more apparatus as claimed in claim 26 wherein the complexing agent is a comprised of a carboxylic acid or salt thereof.
32. One or more apparatus as claimed in claim 31 wherein the complexing agent is citric acid or salt thereof.

This Sheet Has Been Replaced





33. One or more apparatus as claimed in claim 26 and further comprising means for bulk electroplating a layer of copper over the enhanced seed layer using an acidic copper bath.
34. One or more apparatus as claimed in claim 33 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is greater than the magnitude of the plating voltage in the acidic copper bath.
35. One or more apparatus as claimed in claim 34 and further comprising means for rinsing the workpiece prior to its introduction to the means for electrochemically adding a further layer of copper.
36. A process for applying a metal structure to a workpiece on which one or more microelectronic devices are to be formed, the workpiece including a barrier layer deposited on a surface thereof, the process comprising the steps of:
- (a) forming an ultra-thin metal seed layer on the barrier layer, the seed layer having a thickness that is insufficient to completely cover the barrier layer;
 - (b) subjecting the workpiece to an electrolytic copper deposition process in an alkaline electrolytic bath having a pH of at least about 9.0 and copper ions complexed with a complexing agent such that additional copper is deposited on



37

PCT/US 99/0631

PEAVUS 17 APR 2

the ultra-thin copper seed layer to enhance the seed layer and completely cover the barrier layer thereby forming an enhanced seed layer that is suitable for bulk electroplating.

37. The process of claim 36 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.
38. The process of claim 37 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 50 to about 500 Angstroms.
39. The process of claim 38 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 100 to about 250 Angstroms.
40. The process of claim 39 wherein the ultra-thin seed layer formed in step (a) has a thickness of about 200 Angstroms.
41. [CANCELED]
42. The process of claim 36 wherein the copper ions in the electrolytic bath are provided by copper sulfate.
43. The process of claim 42 wherein the copper sulfate in the electrolytic bath has a concentration within the range of 0.03 to 0.25 M.

AMENDED SHEET

This Sheet Has Been Replaced





44. The process of claim 42 wherein the concentration of copper sulfate is about 0.1 M.
45. The process of claim 36 wherein the copper complexing agent is comprised of a copper complexing agent selected from EDTA, ED, and citric acid.
46. The process of claim 45 wherein the complexing agent is comprised of EDTA and the EDTA in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
47. The process of claim 45 wherein the complexing agent is comprised of ED and the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.
48. The process of claim 45 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.
49. The process of claim 45 wherein the complexing agent is comprised of citric acid and the citric acid in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.

This Sheet Has Been Replaced



PCT/US 99/06
IPEA/US 17 APR 20

39

50. The process of claim 49 wherein the citric acid has a concentration within the range of 0.1 to 0.4 M.
51. The process of claim 36 and further comprising the step of subjecting the workpiece to a further electrochemical copper deposition process in an acidic electrolytic solution to complete deposition of the copper to a thickness needed for the formation of the copper interconnect structure.
52. The process of claim 51 and further comprising the step of subjecting the workpiece to a rinsing process after step (b) and prior to the further electrochemical copper deposition process in an acidic electrolytic solution.
53. [CANCELED]
54. [CANCELED]
55. [CANCELED]
56. [CANCELED]
57. [CANCELED]
58. [CANCELED]
59. [CANCELED]
60. A process as claimed in claim 1 wherein the ammonium hydroxide is in the form of tetramethylammonium hydroxide.

AMENDED SHEET

This Sheet Has Been Replaced





61. A process as claimed in claim 1 wherein the complexing agent is ED.
62. A process as claimed in claim 1 and wherein the electroplating bath further comprises an amount of ammonium sulfate sufficient to reduce the electrical resistance of the electroplated copper and an amount of ethylene glycol sufficient to increase the conformality of the electroplated copper.
63. The process of claim 7 and further comprising the step of subjecting the workpiece to a further electroplating process in an acidic electrolytic solution to complete deposition of a metal to at least a thickness needed to substantially fill the micro-recessed structures.
64. The process of claim 7 wherein the enhanced seed layer has a thickness at all points on sidewalls of substantially all micro-recessed structures distributed within the workpiece that is equal to or greater than about 10% of the nominal seed layer over an exteriorly disposed surface of the workpiece.
65. A process for applying a metal to a workpiece, the process comprising the steps of:

AMENDED SHEET

This Sheet Has Been Replaced





PCT/US 99/063
IPEA/US 17 APR 20

41

- (a) forming an ultra-thin metal seed layer using a first deposition process, the first deposition process physically anchoring the ultra-thin metal seed layer to an underlying layer, the ultra-thin metal seed layer having a thickness that is insufficient for a subsequent bulk electroplating process;
- (b) enhancing the ultra-thin seed layer by electrochemically depositing an additional metal on the ultra-thin seed layer using a second deposition process that is different from the first deposition process to form an enhanced seed layer that is suitable for a subsequent bulk electroplating process;
- (c) electrolytically depositing a metal on the enhanced seed layer under conditions in which the deposition rate of the electrolytic deposition process is greater than the deposition rate of the process used in enhancing the ultra-thin seed layer.

66. A process for filling a micro-recessed structure disposed in a surface of a workpiece with a metal, the workpiece including a barrier layer deposited on at least a portion of the upper surface thereof and on surfaces of the plurality of micro-recessed structures, the process comprising the steps of:

- (a) forming an ultra-thin metal seed layer on the barrier layer using a physical vapor deposition process, the ultra-thin metal seed layer having a thickness that insufficiently covers the underlying barrier layer thereby rendering it insufficient for bulk-fill electroplating of the micro-recessed structure;

This Sheet Has Been Replaced



AMENDED SHEET



PCT/US 99/0630

IPEA/US 17 APR 200

42

- (b) enhancing the ultra-thin seed layer by electrolytically depositing additional metal on the ultra-thin metal seed layer using an alkaline electroplating solution to thereby form an enhanced seed layer that is suitable for subsequent bulk-fill electroplating of the micro-recessed structure.

67. The process of claim 65 and further comprising the step of the bulk-fill electroplating the micro-recessed structures with a metal using an acidic electroplating solution.

68. A process for applying a metal to a workpiece, the workpiece including an exteriorly disposed surface having a plurality of micro-recessed structures that are defined by sidewalls, the workpiece further including a barrier layer deposited on at least a portion of the exteriorly disposed surface of the workpiece and on at least substantial portions of the walls of the plurality of micro-recessed structures, the process comprising the steps of:

- (a) forming an ultra-thin metal seed layer exterior to the barrier layer using a first deposition process, the ultra-thin metal seed layer having a nominal thickness that is insufficient for filling the micro-recessed structures in a bulk-fill electroplating process;
- (b) enhancing the ultra-thin seed layer by depositing an additional metal using a second deposition process that is different from the first deposition

AMENDED SHEET

This Sheet Has Been Replaced





PCT/US 99/0630


IPEA/US 17 APR 20

43

process to provide an enhanced seed layer, the additional metal being formed from a metal comprising the same metal used to form the ultra-thin seed layer, the enhanced seed layer having a thickness at all points on sidewalls of substantially all micro-recessed structures distributed within the workpiece that renders the workpiece suitable for a subsequent bulk-fill electroplating process; and

- (c) bulk-fill electroplating a metal onto the enhanced seed layer so as to fill the micro-recessed structures.

This Sheet Has Been Replaced



AMENDED SHEET



CLAIMS

1. A process for applying a metal structure to a workpiece comprising:
^ providing an electroplating bath including a source of metal ions as a principal metal species to be deposited during subsequent electroplating, ammonium sulfate in an amount sufficient to reduce resistivity of the subsequently deposited metal species to a predetermined level, a metal ion complexing agent, and a conformality increasing agent;
providing a workpiece on which one or more microelectronic devices are to be formed;
exposing at least one surface of the workpiece to the electroplating bath;
and
providing electroplating power between the at least one surface of the workpiece and an anode disposed in electrical contact with the electroplating bath to electroplate the principal metal species onto the at least one surface of the workpiece.
2. A process as set forth in Claim 1, wherein the source of metal ions comprises copper sulfate.
3. A process as set forth in Claim 2, wherein the conformality increasing agent comprises ethylene glycol.
- ^ 4. A process as set forth in claim 3, wherein the electroplating bath further comprises boric acid.



5. A process as set forth in claim 4 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

6. The workpiece produced by the process of Claim 1.

7. A process for applying a metal structure to a workpiece comprising:
providing an electroplating bath including a source of metal ions as a principal metal species to be deposited during subsequent electroplating, boric acid, and a metal ion complexing agent;

providing a workpiece on which one or more microelectronic devices are to be formed;

exposing at least one surface of the workpiece to the electroplating bath;


and

providing electroplating power between the at least one surface of the workpiece and an anode disposed in electrical contact with the electroplating bath to electroplate the principal metal species onto the at least one surface of the workpiece.

8. A process as set forth in Claim 7, wherein the source of metal ions comprises copper sulfate.

9. A process as set forth in claim 7 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

10. A process as set forth in claim 7 wherein the complexing agent is citric acid.

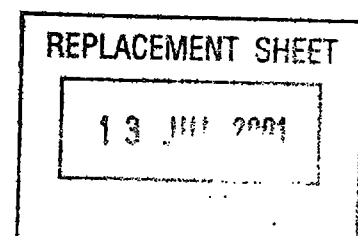



11. A process as set forth in Claim 7, wherein the electroplating bath further comprises an alkaline agent present in an amount sufficient to adjust the pH of the bath to at least 9.0.

12. The workpiece produced by the process of Claim 7.

13. A process for applying a metallization interconnect structure to a workpiece comprising:


(a) forming an ultra-thin metal seed layer using a first deposition process, the first deposition process anchoring the ultra-thin metal seed layer to an underlying layer, the ultra-thin metal seed layer having physical characteristics that render it generally unsuitable for bulk electrolytic deposition of a metal thereon on the metal seed layer;

(b) enhancing the ultra-thin metal seed layer by electrochemically depositing additional metal on the ultra-thin metal seed layer to provide an enhanced seed layer using a second deposition process that is different from the first deposition process; and

(c) electrolytically depositing a metal on the enhanced seed layer under conditions in which the deposition rate of the electrolytic deposition process is substantially greater than the deposition rate of the process used to enhance the metal seed layer.

14. The process of claim 13 wherein the additional metal is copper.

15. The process of claim 13 wherein the ultra-thin seed layer is formed on a barrier layer deposition on a surface of the workpiece.

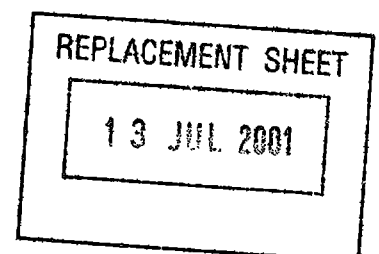



16. The process of claim 13 wherein the electrochemical deposition step occurs in an alkaline bath.

17. The process of claim 16 wherein the alkaline bath comprises metal ions and an agent effective in complexing the metal ions.

18. The process of claim 13 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.

19. The process of claim 13 wherein the ultra-thin metal seed layer formed in step (a) has a thickness of less than or equal to 500 Angstroms.

20. The process of claim 19 wherein the ultra-thin metal layer formed in step (a) has a thickness of 100 to 250 Angstroms.

21. The process of claim 13 wherein the complexing agent is comprised of one or more complexing agents selected from EDTA, ED, and polycarboxylic acid.

22. The process of claim 21 wherein the complexing agent is comprised of EDTA and the EDTA in the bath has a concentration within the range of 0.03 to 1.0 M.

23. The process of claim 22 wherein the complexing agent is comprised of ED and wherein the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.

24. The process of claim 23 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.



25. The process of claim 22 wherein the complexing agent is comprised of citric acid and the citric acid in the bath has a concentration within the range of 0.03 to 1.0 M.

26. The process of claim 13 wherein the step of subjecting the workpiece to a further electrochemical deposition process occurs in an acidic electrolytic solution to complete deposition of the metal to a thickness needed for the formation of the interconnect structure.


27. The process of claim 26 and further comprising the step of subjecting the workpiece to a rinsing process after electrochemical deposition in the outline bath and prior to the further electrochemical copper deposition process in an acidic electrolytic solution.

28. The process of claim 13, wherein the enhanced seed layer has a thickness at all points on sidewalls of substantially all recessed features distributed within the workpiece that is equal to or greater than 10% of the enhanced seed layer thickness over the exteriorly diseased surface of the workpiece.

29. The product produced by the process of claim 13.

30. A process for applying a metallization interconnect structure to a workpiece comprising:

(a) forming an ultra-thin metal seed layer using a first deposition process, the first deposition process anchoring the ultra-thin metal seed layer to an

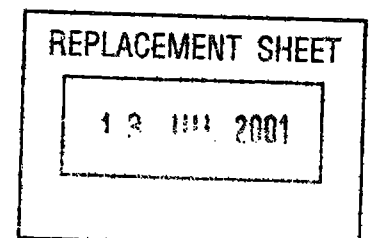



underlying layer, the ultra-thin metal seed layer having physical characteristics that render it generally unsuitable for bulk electrolytic deposition of a metal thereon;

(b) subjecting the workpiece to an electrochemical copper deposition process that differs from the first deposition process, in an alkaline electrolytic bath having copper ions complexed with a complexing agent such that additional copper is deposited on the ultra-thin copper seed layer to thereby enhance the seed layer to provide an enhanced seed layer; and

(c) electrolytically depositing a metal on the enhanced seed layer under conditions in which the deposition rate of the electrolytic deposition process is substantially greater than the deposition rate of the process used to enhance the metal seed layer.


31. The process of claim 30 wherein the ultra-thin metal seed layer formed in step (a) is formed by physical vapor deposition.

32. The process of claim 30 wherein the ultra-thin seed layer formed in step (a) has a thickness of less than or equal to 500 Angstroms.

33. The process of claim 32 wherein the ultra-thin seed layer formed in step (a) has a thickness of 100 to 250 Angstroms.

34. The process of claim 33 wherein the ultra-thin seed layer formed in step (a) has a thickness of 200 Angstroms.

35. The process of claim 30 wherein the alkaline electrolytic bath has a pH of at least 9.0.

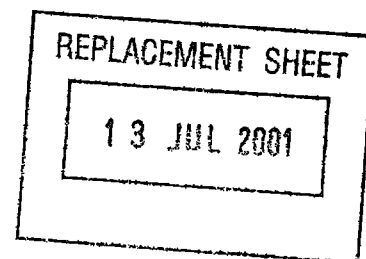



^36. The process of claim 30 wherein the copper ions in the electrolytic bath are provided by copper sulfate.

^37. The process of claim 36 wherein the copper sulfate in the electrolytic bath has a concentration within the range of 0.03 to 0.25 M.

^38. The process of claim 36 wherein the concentration of copper sulfate is about 0.1 M.

^39. The process of claim 30 wherein the copper complexing agent is comprised of a copper complexing agent selected from EDTA, ED, and citric acid.

^40. The process of claim 39 wherein the complexing agent is comprised of EDTA and the EDTA in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.

^41. The process of claim 39 wherein the complexing agent is comprised of ED and the ED in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.

^42. The process of claim 39 wherein the complexing agent is comprised of EDTA and the EDTA has a concentration within the range of 0.1 to 0.4 M.

^43. The process of claim 39 wherein the complexing agent is comprised of citric acid and the citric acid in the electrolytic bath has a concentration within the range of 0.03 to 1.0 M.



^44. The process of claim ^43 wherein the citric acid has a concentration within the range of 0.1 to 0.4 M.

^45. The process of claim ^30 wherein the step of subjecting the workpiece to a further electrochemical copper deposition process occurs in an acidic electrolytic solution to complete deposition of the copper to a thickness needed for the formation of the copper interconnect structure.

^46. The process of claim ^45 and further comprising the step of subjecting the workpiece to a rinsing process after step (b) and prior to the further electrochemical copper deposition process in an acidic electrolytic solution.


47. The product produced by the process of claim 30.

48. The process of claim 30, wherein the ultra-thin metal seed layer is formed on a barrier layer deposited on a surface layer of the workpiece.

^49. A workpiece comprising:
a plurality of the recessed structures distributed in a surface of the workpiece;

an enhanced seed layer having a thickness at all points on sidewalls of substantially all recessed features distributed within the workpiece that is equal to or greater than ^10% of the nominal seed layer thickness over an exteriorly disposed surface of the workpiece.

^50. A workpiece as claimed in claim ^49 wherein the thickness of the sidewalls of substantially all recessed features is equal to or greater than ^20%.

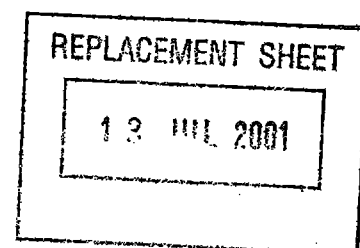



^ 51. A solution for electroplating copper, the solution comprising copper sulfate, ammonium sulfate, and ethylene glycol.

^ 52. The solution of claim 51 and further comprising a complexing agent.

^ 53. A solution for electroplating copper, the solution comprising copper sulfate, boric acid, and a complexing agent.


^ 54. The solution of claim 53 wherein the complexing agent is selected from the group consisting of ED, EDTA, and a polycarboxylic acid.

^ 55. The solution of claim 53 wherein the complexing agent is citric acid.

^ 56. In a manufacturing line including a plurality of apparatus for the manufacture of microdevices, one or more apparatus of the plurality of apparatus being used for applying a metallization interconnect structure to a surface of a workpiece used to form the microdevices, the one or more apparatus comprising:

^ a metal deposition tool adapted for applying a conductive ultra-thin seed layer to a surface of the workpiece the ultra-thin seed layer being generally unsuitable for bulk electrochemical deposition of the metallization interconnect structure;

^ a first processing station adapted for electrochemically enhancing the conductive ultra-thin seed layer by depositing additional conductive material to render the enhanced seed layer suitable for subsequent electrochemical application of the interconnect metallization; and

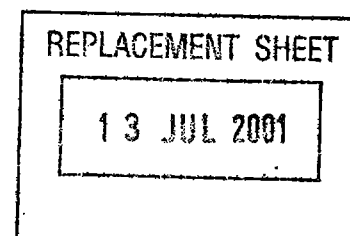



a second processing structure, disposed to receive the workpiece with the enhanced seed layer, adapted for electrochemically depositing a bulk portion of the interconnect metallization on the enhanced seed layer.

^ 57. One or more apparatus as claimed in claim 56 wherein the metal deposition tool is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece.


^ 58. One or more apparatus as claimed in claim 56 wherein the metal deposition tool is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a PVD process.

^ 59. One or more apparatus as claimed in claim 56 wherein the metal deposition tool is further defined by means for applying a conductive ultra-thin copper seed layer to a barrier layer surface of the workpiece using a CVD process.

^ 60. One or more apparatus as claimed in claim 56 wherein the first processing station is further defined by means for electrochemically enhancing the conductive ultra-thin seed layer by electrochemically depositing copper using an alkaline copper bath having a complexing agent.

^ 61. One or more apparatus as claimed in claim 60 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is at least about or greater than 1.1 volts.

^ 62. One or more apparatus as claimed in claim 60 wherein the alkaline bath has a pH greater than or equal to 9.0.

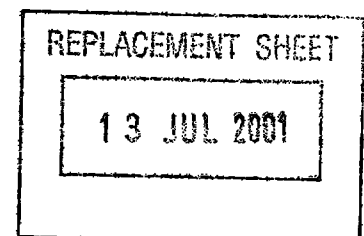



^63. One or more apparatus as claimed in claim ^60 wherein the complexing agent is comprised of EDTA.

^64. One or more apparatus as claimed in claim ^60 wherein the complexing agent is comprised of ED.

^65. One or more apparatus as claimed in claim ^60 wherein the complexing agent is comprised of a carboxylic acid or salt thereof.


^66. One or more apparatus as claimed in claim ^65 wherein the complexing agent is citric acid or salt thereof.

^67. One or more apparatus as claimed in claim ^60 and further comprising means for electrochemically adding a further layer of copper over the conductive ultra-thin seed layer by electrochemically depositing copper using an acidic copper bath.

^68. One or more apparatus as claimed in claim ^67 wherein the electrochemical enhancement of the ultra-thin seed layer takes place at a plating voltage having a magnitude that is greater than the magnitude of the plating voltage in the acidic copper bath.

^69. One or more apparatus as claimed in claim ^68 and further comprising means for rinsing the workpiece prior to its introduction to the means for electrochemically adding a further layer of copper.

70. In a manufacturing line including a plurality of apparatus for the manufacture of microdevices, one or more apparatus of the plurality of apparatus being

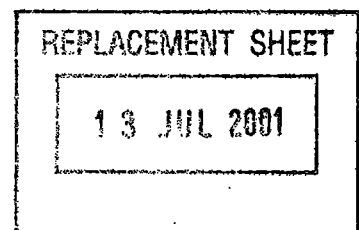



used for applying a metallization interconnect structure to a surface of a workpiece used to form the microdevices, the one or more apparatus comprising:

a reactor that receives a surface of the workpiece and then is adapted to apply and control the composition of a plating bath including a source of metal ions as a principal metal species to be deposited during subsequent electroplating, boric acid, and a complexing agent, to the surface of the workpiece; and


an anode disposed in electrical contact with the electroplating bath; and

a power supply for supplying power between at least one surface of the workpiece and the anode to electroplate the principal metal species onto at least one surface of the workpiece.

71. In a manufacturing line including a plurality of apparatus for the manufacture of microdevices, one or more apparatus of the plurality of apparatus being used for applying a metallization interconnect structure to a surface of a workpiece used to form the microdevices, the one or more apparatus comprising:

a reactor that receives a surface of the workpiece and then is adapted to apply and control the composition of a plating bath including a source of metal ions as a principal metal species to be deposited during subsequent electroplating, ammonium sulfate in an amount sufficient to reduce resistivity of the subsequently deposited metal species to a predetermined level, a metal ion complexing agent and a conformality increasing agent, to the surface of the workpiece; and

an anode disposed in electrical contact with the electroplating bath; and

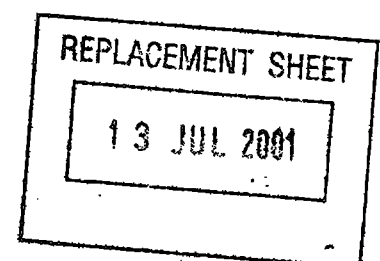



a power supply for supplying power between at least one surface of the workpiece and the anode to electroplate the principal metal species on to the at least one surface of the workpiece.

MSK:mlh

REPLACEMENT SHEET

13 JUL 2001



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : C25D 3/58, 3/38, 7/00, 5/02, B41M 5/20, H01M 4/02, H01L 21/288, 21/445, C23C 28/00, 28/02</p>	A1	<p>(11) International Publication Number: WO 99/47731</p> <p>(43) International Publication Date: 23 September 1999 (23.09.99)</p>
<p>(21) International Application Number: PCT/US99/06306</p> <p>(22) International Filing Date: 22 March 1999 (22.03.99)</p> <p>(30) Priority Data: 09/045,245 20 March 1998 (20.03.98) US 60/085,675 15 May 1998 (15.05.98) US</p> <p>(71) Applicant (for all designated States except US): SEMITOOL, INC. [US/US]; 655 Reserve Drive, Kalispell, MT 59901 (US).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): CHEN, Linlin [CA/US]; 121 Hawthorne Avenue, Kalispell, MT 59901 (US).</p> <p>(74) Agent: ERICKSON, Randall, T.; Rockey, Milnamow & Katz, Ltd., Two Prudential Plaza, 47th floor, 180 North Stetson, Chicago, IL 60601 (US).</p>		<p>(81) Designated States: CN, JP, KR, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>

(54) Title: APPARATUS AND METHOD FOR ELECTROLYTICALLY DEPOSITING COPPER ON A SEMICONDUCTOR WORKPIECE

(57) Abstract

This invention employs a novel approach to the copper metallization of a workpiece, such as a semiconductor workpiece. In accordance with the invention, an alkaline electrolytic copper bath (35) is used to electroplate copper onto a seed layer (30), electroplate copper directly onto a barrier layer material, or enhance an ultra-thin copper seed layer which has been deposited on the barrier layer using a deposition process such as PVD. The resulting copper layer provides an excellent conformal copper coating that fills trenches, vias, and other microstructures in the workpiece. When used for seed layer enhancement, the resulting copper seed layer provides an excellent conformal copper coating that allows the microstructures to be filled with a copper layer having good uniformity using electrochemical deposition techniques. Further, copper layers that are electroplated in the disclosed manner exhibit low sheet resistance and are readily annealed at low temperatures.

