(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
23 December 2009 (23.12.2009)

PCT

(10) International Publication Number
WO 2009/153540 A1

(51) International Patent Classification:
A61M 5/20 (2006.01)

(21) International Application Number:
PCT/GB2009/001445

(22) International Filing Date:
10 June 2009 (10.06.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0811349.0 19 June 2008 (19.06.2008) GB

(71) Applicant *(for all designated States except US)*: **CILAG GMBH INTERNATIONAL** [CH/CH]; Landis + Gyr, Strasse 1, CH-6300 Zug (CH).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **JENNINGS, Douglas, Ivan** [GB/GB]; PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6DP (GB).

(74) Agents: **BRUNNER, John, Michael, Owen** et al.; CARPMAELS & RANSFORD, 43-45 Bloomsbury Square, London WC1A 2RA (GB).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: REUSABLE AUTO- INJECTOR

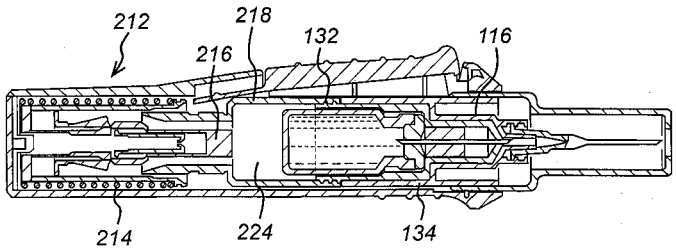


FIG. 5

(57) Abstract: An injection device comprises a first sub-assembly (110) comprising a chamber (112) for holding a fluid and a transfer assembly (116) moveably disposed within the chamber. The chamber comprises an exit aperture and an inner surface and the transfer assembly has an outer surface substantially in contact with the inner surface about its perimeter. The transfer assembly is adapted to transfer fluid into the chamber when the transfer assembly is moved within the chamber.

WO 2009/153540 A1