




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F21P 1/00	A1	(11) International Publication Number: WO 98/23896 (43) International Publication Date: 4 June 1998 (04.06.98)
(21) International Application Number: PCT/FI97/00697 (22) International Filing Date: 14 November 1997 (14.11.97) (30) Priority Data: 964696 25 November 1996 (25.11.96) FI (71)(72) Applicants and Inventors: HATJASALO, Leo [FI/FI]; Särkiniementie 11 A 6, FIN-00210 Helsinki (FI). RINKO, Kari [FI/FI]; Vironkatu 3 C 48, FIN-00170 Helsinki (FI). (74) Agent: KANGASMÄKI, Reijo; Finnish Patent Consulting FPC, Hermiankatu 14, FIN-33720 Tampere (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Finnish).</i>

(54) Title: METHOD FOR PRODUCTION OF CONDUCTING ELEMENT AND CONDUCTING ELEMENT

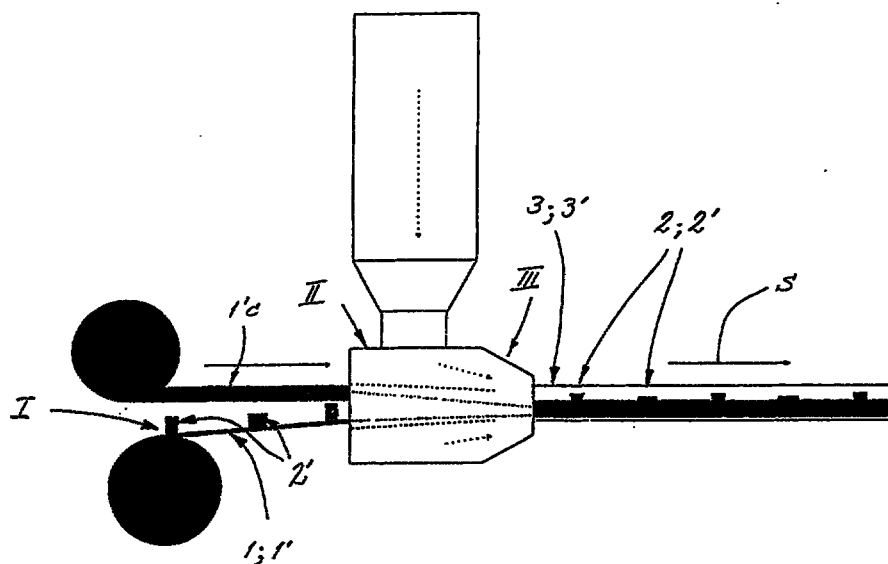

(57) Abstract

Method for production of conducting element, which conducting element consists at least of an elongated electricity conductive conductor part (1), in which several electric components (2), bringing out the lighting operation or like according to the use of the conducting element, are being attached to one after another in the longitudinal direction (s), whereafter the said entirety is being surrounded by a casing part (3) protecting the same. The conducting element is being manufactured from an essentially flat conductor part (1; 1'), such as a band a stripe or a like, into which there has been attached electric components (2'), such as probes, LEDs, resistors and/or the like by arranging the same, preferably throughout built-in when viewed in a cross section with a casing material (3') forming the said casing part (3), by exploiting a continuous manufacturing process, such as extrusion or like. The invention also relates to a conducting element to be manufactured by the method.