

(43) International Publication Date
19 February 2015 (19.02.2015)(51) International Patent Classification:
F16L 1/16 (2006.01)(21) International Application Number:
PCT/AU2014/000803(22) International Filing Date:
13 August 2014 (13.08.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2013903051 13 August 2013 (13.08.2013) AU(71) Applicant: SUBCON TECHNOLOGIES PTY LTD
[AU/AU]; 27 Barker Street, Belmont, Western Australia
6104 (AU).(72) Inventors: ALLEN, Matthew; 17 Arundel Street, Kens-
ington, Western Australia 6151 (AU). HALLAM, James;
U2/10 Fraser Street, East Fremantle, Western Australia
6158 (AU).(74) Agent: GRIFFITH HACK; Level 19, 109 St Georges
Terrace, Perth, Western Australia 6000 (AU).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND SYSTEM FOR SUPPORTING SUBMERGED STRUCTURES

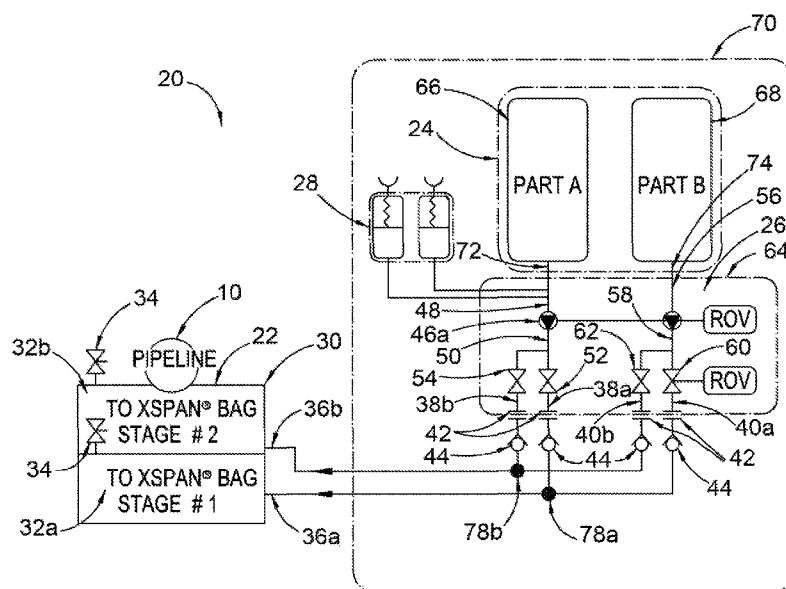


FIG. 2

(57) Abstract: A system (20) and asso-
ciated method (100) is provided for sup-
porting a submerged structure (10) on an
underwater floor (12). The system (20)
incorporates an inflatable container (22),
a submersible supply (24) of a settable
composition and a submersible transfer
system (26) operable to transfer the set-
table composition from the supply (24)
to the container (22). The system (20) is
arranged so that the supply (24) is sub-
jected to a hydrostatic pressure in the or-
der of that acting on the inflatable con-
tainer (22).