



(51) International Patent Classification:

C07C 7/04 (2006.01) B01J 19/24 (2006.01)
C07C 11/167 (2006.01)

(21) International Application Number:

PCT/US2013/060519

(22) International Filing Date:

19 September 2013 (19.09.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/711,540 9 October 2012 (09.10.2012) US

(71) Applicant: LUMMUS TECHNOLOGY INC. [US/US];
1515 Broad Street, Bloomfield, NJ 07003-3096 (US).

(72) Inventors: BRUMMER, Robert, John; 5 Evergreen Avenue, Wharton, NJ 07885 (US). DWYER, Thomas, Alexander; 8408 Brittany Dr., Wayne, NJ 07470 (US).

(74) Agents: BERGMAN, Jeffrey, S. et al.; Osha Liang LLP, 909 Fannin Street, Suite 3500, Houston, TX 77010 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLEXIBLE BUTADIENE EXTRACTION PROCESS

FIGURE 1

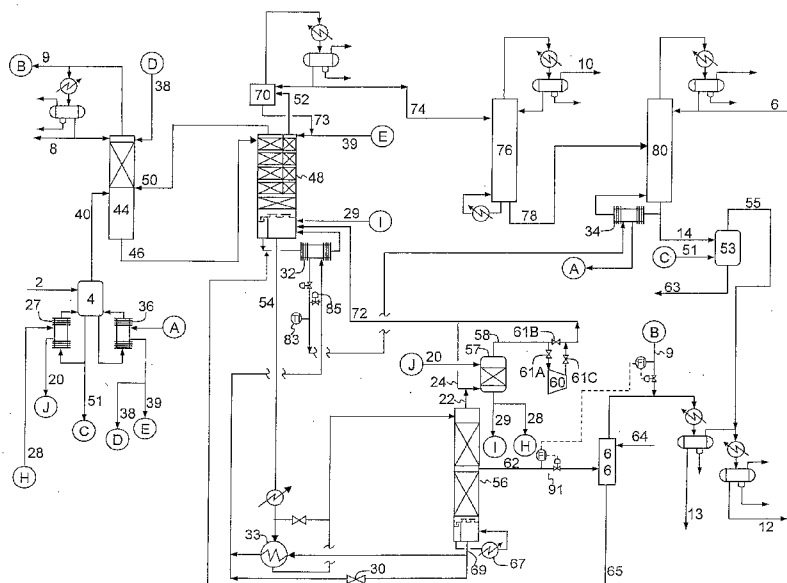

(57) Abstract: A butadiene extraction processes designed for flexible operations, with or without a compressor, is disclosed. The ability to run at both high and low pressures provides added process flexibility.