



(51) International Patent Classification:
H04N 7/26 (2006.01) *H04N 7/34* (2006.01)

(21) International Application Number:
PCT/US2012/041545

(22) International Filing Date:
8 June 2012 (08.06.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/495,332 9 June 2011 (09.06.2011) US
61/503,712 1 July 2011 (01.07.2011) US
61/504,664 5 July 2011 (05.07.2011) US
61/533,118 9 September 2011 (09.09.2011) US
13/491,076 7 June 2012 (07.06.2012) US

(71) Applicant (for all designated States except US): **QUALCOMM INCORPORATED** [US/US]; 5775 Morehouse Drive, ATTN: International IP Administration, San Diego, California 92121-1714 (US).

(72) Inventors; and
(75) Inventors/Applicants (for US only): **CHIEN, Wei-Jung** [CN/US]; 5775 Morehouse Drive, San Diego, California 92121 (US). **KARCZEWICZ, Marta** [US/US]; 5775 Morehouse Drive, San Diego, California 92121-1714 (US). **WANG, Xianglin** [US/US]; 5775 Morehouse Drive, San Diego, California 92121-1714 (US).

(74) Agent: **KONIEWICZ, Sarah M.**; Shumaker & Sieffert, P.A., 1625 Radio Drive, Suite 300, Woodbury, Minnesota 55125 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: ENHANCED INTRA-PREDICTION MODE SIGNALING FOR VIDEO CODING USING NEIGHBORING MODE

(57) Abstract: This disclosure describes techniques for intra-prediction mode signaling for video coding. In one example, a video coder is configured to determine, for a block of video data, a set of most probable intra-prediction modes such that the set of most probable intraprediction modes has a size that is equal to a predetermined number that is greater than or equal to two. The video coder is also configured to code a value representative of an actual intra-prediction mode for the block based at least in part on the set of most probable intraprediction modes and code the block using the actual intra-prediction mode. The video coder may further be configured to code the block using the actual intra-prediction mode, e.g., to encode or decode the block. Video encoders and video decoders may implement these techniques.

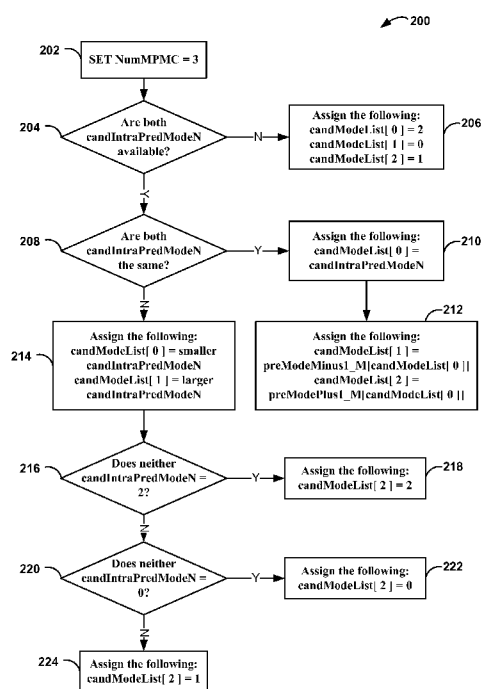


FIG. 8



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*