

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2024 年 4 月 4 日 (04.04.2024)



(10) 国际公布号
WO 2024/065711 A1

(51) 国际专利分类号:
G01S 13/08 (2006.01) H04W 64/00 (2009.01)

(21) 国际申请号: PCT/CN2022/123357

(22) 国际申请日: 2022 年 9 月 30 日 (30.09.2022)

(25) 申请语言: 中文

(26) 公布语言: 中文

(71) 申请人: 华为技术有限公司 (HUAWEI TECHNOLOGIES CO., LTD.) [CN/CN]; 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。

(72) 发明人: 李德建 (LI, Dejian); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。程型清 (CHENG, Xingqing); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。高磊 (GAO, Lei); 中国广东省深圳市龙岗区坂田华为总部办公楼, Guangdong 518129 (CN)。


(74) 代理人: 北京同达信恒知识产权代理有限公司 (TDIP & PARTNERS); 中国北京市西城区裕民路18号北环中心A座2002, Beijing 100029 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW。

(84) 指定国(除另有指明, 要求每一种可提供的地区保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM, AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO,

(54) Title: DISTANCE MEASUREMENT METHOD, DEVICE AND SYSTEM

(54) 发明名称: 一种测距方法、装置和系统

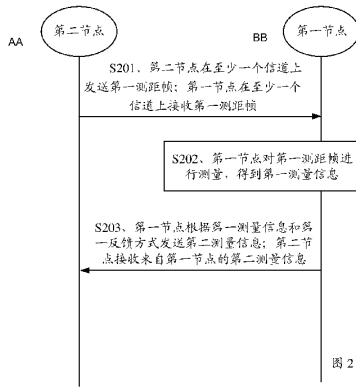

S201 The second node sends a first distance measurement frame on at least one channel; and the first node receives the first distance measurement frame on at least one channel
S202 The first node measures the first distance measurement frame to obtain first measurement information
S203 The first node sends second measurement information according to the first measurement information and a first feedback mode; and the second node receives the second measurement information from the first node
AA Second node
BB First node

(57) Abstract: A distance measurement method, device and system, which are used for implementing reliable distance measurement. A first node measures a first distance measurement frame to obtain first measurement information (S202); and the first node sends second measurement information according to the first measurement information and a first feedback mode (S203). In other words, the form in which the first node feeds back measurement information must be determined according to a measurement result of the first node and the first feedback mode. According to the described distance measurement method, measurement information is fed back in a distance measurement scenario, and the reliability and flexibility of distance measurement are improved.

(57) 摘要: 一种测距方法、装置和系统, 用于实现可靠测距。第一节点对第一测距帧进行测量得到第一测量信息(S202); 第一节点根据第一测量信息和第一反馈方式发送第二测量信息(S203); 换言之, 第一节点以何种形式反馈测量信息, 需要根据第一节点的测量结果和第一反馈方式确定。测距方法实现了在测距场景下反馈测量信息, 提高了测距的可靠性和灵活性。

[续页]

RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

— 包括国际检索报告(条约第21条(3))。