

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number
WO 02/077457 A1

(51) International Patent Classification⁷: **F04B 53/16** //
53/14, F16J 10/02, F16F 7/09

(72) Inventor; and

(75) Inventor/Applicant (for US only): **VAN DER BLOM, Nicolaas** [NL/DK]; Gaerdet 12, DK-3460 Birkerød (DK).

(21) International Application Number: PCT/DK02/00216

(22) International Filing Date: 27 March 2002 (27.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PA 2001 00506 27 March 2001 (27.03.2001) DK
PA 2001 00507 27 March 2001 (27.03.2001) DK


(71) Applicant (for all designated States except US): **NVB INTERNATIONAL A/S** [DK/DK]; Gaerdet 12, P.O. Box 69, DK-3460 Birkerød (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent

[Continued on next page]

(54) Title: A COMBINATION OF A CHAMBER AND A PISTON, A PUMP, A MOTOR, A SHOCK ABSORBER AND A TRANSDUCER INCORPORATING THE COMBINATION

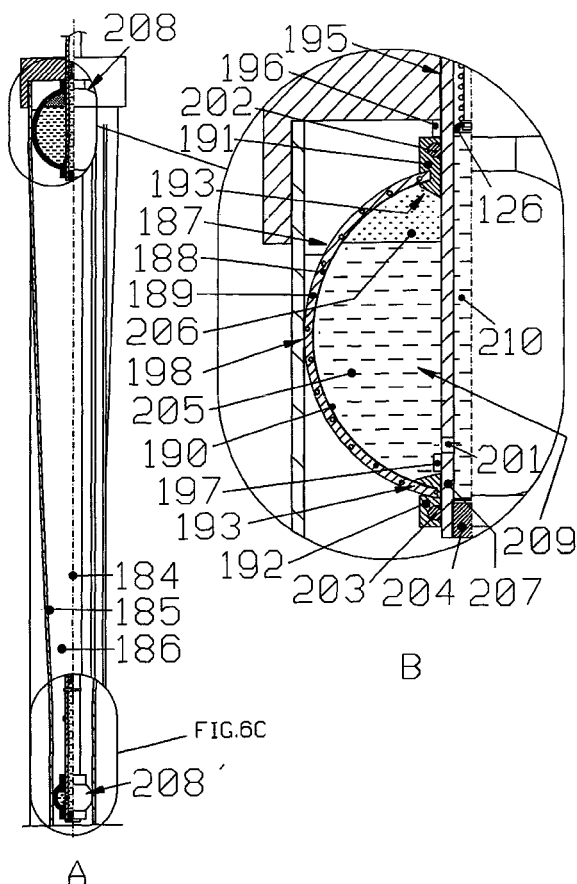

(57) Abstract: A piston-chamber combination comprising an elongate chamber which is bounded by an inner chamber wall and comprising an elastically deformable piston comprising a container in said chamber to be sealingly movable relative to said chamber at least between first and second longitudinal positions of said chamber, said chamber having cross-sections of different cross-sectional areas at the first and second longitudinal positions of said chamber and at least substantially continuously different cross-sectional areas at intermediate longitudinal positions between the first and second longitudinal positions thereof, the cross-sectional area at the first longitudinal position being larger than the cross-sectional area at the second longitudinal position, said piston including a piston body and sealing means supported by the piston body for sealing on said inner chamber wall. Said piston body being designed to adapt itself and said sealing means to said different cross-sectional areas of said chamber during the relative movements of said piston from the second longitudinal position through said intermediate longitudinal positions to the first longitudinal position of said chamber.

WO 02/077457 A1



(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, — *with amended claims and statement*
NE, SN, TD, TG).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.