



- (51) **International Patent Classification:**
G05B 19/418 (2006.01) *G01M 3/20* (2006.01)
- (21) **International Application Number:**
PCT/EP2013/056609
- (22) **International Filing Date:**
27 March 2013 (27.03.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** WILCO AG [CH/CH]; Rigackerstrasse 11, CH-5610 Wohlen (CH).
- (72) **Inventor:** LEHMANN, Martin; Wannenbühlweg 10, CH-5610 Wohlen (CH).
- (74) **Agent:** TROESCH SCHEIDEGGER WERNER AG; Jacques Troesch, Schwänthenmos 14, CH-8126 Zumikon (CH).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD OF INLINE INSPECTING AND/OR TESTING DEVICES AND APPARATUS TO PERFORM SUCH METHOD

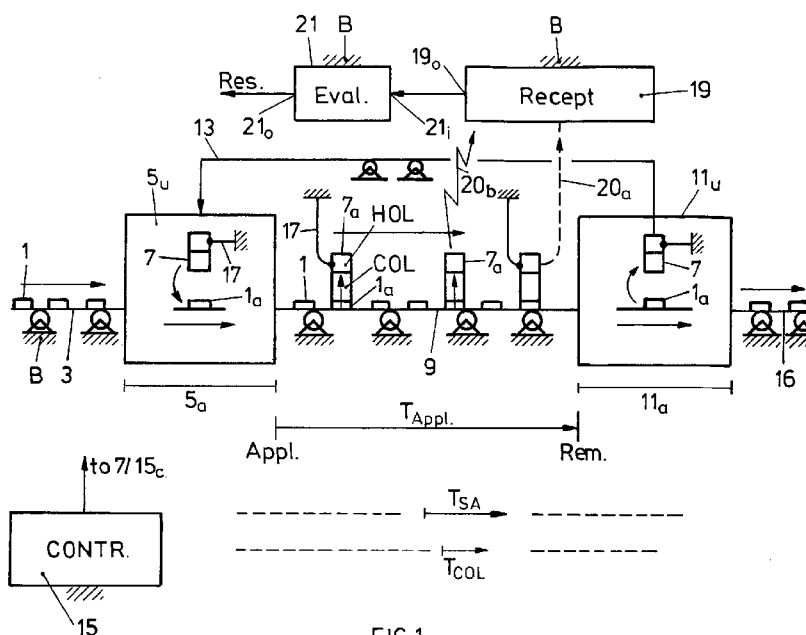


FIG.1

(57) **Abstract:** Inspecting and/or testing of inline conveyed devices (1) is performed in that a monitoring unit (7) is applied to a device (1_a). The monitoring unit (7) is removed in a removing area (11_a). Within the timespan ($T_{Appl.}$) the monitoring unit (7) is applied to the device (1), the monitoring unit (7) is operated in a standalone operating mode (T). During a timespan (T_{COL}) information about the device (1_a) to which the monitoring unit (7) is applied is collected in the monitoring unit (7). This timespan of collecting (T_{COL}) includes at least a part of the timespan (T_{SA}) during which the monitoring unit is operated in standalone mode.

