

THIS SHEET HAS BEEN REPLACED

MECHANISM FOR MOVING
A TAPE WITHIN A TAPE DRIVE

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a tape drive capstan motor assembly for moving a tape within a tape cartridge, and more particularly to a capstan motor
10 assembly including an intermeshing gear train for transmitting motor torque from the motor to the tape driver without slippage between the elements.

Description of the Related Art

15 Tape drives are widely used in data processing systems for applications including primary data storage, archival data storage, journaling, and most significantly, as a back-up data storage device to the system's hard drive. Conventional tape drives are
20 designed to transfer data to and from a length of magnetically encoded tape, typically one-quarter inch in width, which tape is transferred between a supply reel and a take-up reel. Currently, most 3½ inch form factor tape drives utilize a so called "minicartridge"
25 cassette tape for data storage. This type of cartridge is generally described in American National Standard ANSI 3.55-1977.

In conventional tape drive operation, as shown in Fig. 1, the data tape 10 within the cartridge 12
30 travels from a supply reel 13, past a front face of the cartridge, and is stored on a take-up reel 14. The tape is advanced between the take-up and supply reels by means of a belt 16 within the cartridge. The belt is wrapped around a capstan belt wheel 17 within the



THIS SHEET HAS BEEN
REPLACED

-2-

cassette which is driven by a capstan motor assembly 18 within the tape drive.

As shown in Fig. 1, a conventional capstan motor assembly 18 includes a capstan drive roller 20 rotatably engaging an idler 22. Idler 22 is small enough so that a portion of the idler may be received through the opening 29 in the front face of cartridge 12 to thereby contact the capstan belt wheel 17 within the cartridge 12. When the cartridge 12 is properly inserted within the drive, the capstan belt wheel pushes against the idler 22, which in turn pushes against the drive roller 20, thus creating a pressure contact between the capstan belt wheel 17 and idler 22, and between idler 22 and drive roller 20. A motor 24 causes rotation of the capstan drive roller 20. The roller 20 rotates idler 22, which in turn rotates wheel 17 so as to advance the tape 10.

In conventional capstan motor assemblies, the idler 22 may be supported on one end of a swinging link 22A so as to pivot about a pivot point 25 in a direction indicated by arrow A-A. The capstan motor 24, drive roller 20, and pivot point 25 may further be supported on a plate 27, which is also provided to pivot about a pivot point 31 in the direction of arrow B-B. Allowing the plate 27 and link 22A to pivot provides a substantially equal contact pressure between the drive wheel 20 and the idler 22, and between idler 22 and the capstan belt wheel 17.

Conventionally, at least the outer circular surface of idler 22 is covered with an elastic material having a high coefficient of friction. This material is provided to prevent slippage between the idler and the drive roller, and between the idler and the capstan belt wheel as those elements rotate in contact with

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

-3-

each other. However, a problem with conventional capstan motor assemblies is that, over time, the circular surfaces of the capstan drive roller, the idler and/or the capstan belt wheel may become worn, and particulate matter may lodge between the elements, thereby deforming the circular shape of the elements. Moreover, dirt may accumulate on the elements, thereby decreasing the frictional force between adjacent contacting surfaces. All of these occurrences tend to cause slippage between the drive roller and idler, and between the idler and the capstan belt wheel. Slippage inhibits drive performance for several reasons. Significantly, it is very important to both monitor and control the speed with which the data tape advances past the recording area. When slippage occurs, there is no way to accurately control and maintain the speed of the advancing tape. Moreover, particularly during a recording cycle, the rotational speed of the capstan motor is often used to monitor the translational speed of the data tape. However, when slippage occurs, the motor speed will not accurately reflect the speed of the data tape. A loss of the ability to control and/or monitor the tape speed may result in read/write errors or even drive failure in extreme cases.

25

SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a tape drive wherein the speed of the advancing data tape may be accurately controlled and monitored over prolonged use of the drive.

It is a further object of the present invention to provide a tape drive including a capstan motor assembly for preventing slippage between the capstan drive roller and the driven idler.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

-4-

These and other objects are accomplished with the present invention which relates to a tape drive having a novel capstan motor assembly for advancing and rewinding a data tape. The capstan motor assembly according to the present invention includes a capstan motor, a motor extension fixedly mounted on top of the capstan motor, and a driver gear fixedly mounted on top of the motor extension. The capstan motor assembly may further include an idler mounted adjacent and in non-contacting relation to the motor extension. A driven gear is mounted on top of the idler. When a tape cartridge is properly loaded within the tape drive, the driver gear matingly engages the driven gear. Thus, upon rotation of the capstan motor, the driver gear rotates the driven gear, which in turn causes rotation of the idler. A portion of the idler is in contact with a capstan belt wheel within the cartridge. The idler rotates the capstan belt wheel, which in turn moves the data tape past the recording area. The gear train allows the motor force to be transmitted to the capstan belt wheel without slippage between the drive roller and the idler normally occurring in conventional capstan motor assemblies.

25 BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be explained with reference to the Figures in which:

FIGURE 1 is a top view of a conventional capstan motor assembly;

30 FIGURE 2A is a top view of a tape drive according to the present invention;

FIGURE 2B is a top view of an alternative embodiment of the present invention;

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

FIGURE 3 is perspective view of the capstan motor assembly according to the present invention;

FIGURE 4 is a top view of the capstan motor assembly according to the present invention;

5 FIGURE 5 is a side view of the capstan motor assembly according to the present invention;

FIGURE 6A is a top view of an alternative embodiment of the present invention;

10 FIGURE 6B is a side view of the alternative embodiment shown in Fig. 6A;

FIGURE 7A is a top view of a further embodiment of the present invention;

FIGURE 7B is a side view of the alternative embodiment shown in Fig. 7A;

15 FIGURE 7C is an enlarged side view of a portion of the drive belt of the embodiment shown in Figs. 7A and 7B; and

FIGURE 8 is a top view of a further embodiment of the present invention.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

-6-

DESCRIPTION OF BEST MODE OF THE INVENTION

The invention will now be described with reference to Figs. 1 - 8, which relate in general to a tape drive 40 for transferring data to and from a data tape 42 within a cartridge 44. The tape drive includes a novel design for the capstan motor assembly, which, in a preferred embodiment of the present invention, may be utilized within a 3½ inch form factor tape drive. However, it is understood that the present invention may be utilized in tape drives of various sizes and designs and may operate with any data tape recording technique, including longitudinal, helical and arcuate scan recording. In a preferred embodiment, the present invention operates with a conventional industry standard minicartridge data tape cartridge 44. However, the present invention is not limited to operation with a minicartridge, and may operate with tape cartridges of various sizes and designs.

Referring now to Fig. 2, there is shown a tape drive 40 according to the present invention. The cartridge 44 is inserted into the drive through a slot 46 formed in a front surface of the drive housing. The drive 40 includes a capstan motor assembly 47 for advancing and rewinding the data tape 42, and a read/write assembly 45 for transferring data to and from the data tape 42. Upon full insertion of the cartridge 44 into the drive as shown in Fig. 2, a capstan belt wheel 48 located within the cartridge is adjacent to and in contacting relation with an idler 50 of the capstan motor assembly 47. In the loaded position, a section of the tape 42 is exposed to and located adjacent a read/write transducer 52 of the read/write assembly 45. In response to power and control signals received from a printed circuit board

This Sheet Has Been Replaced



**THIS SHEET HAS BEEN
REPLACED**

-7-

(not shown), the capstan motor assembly 47 rotates the capstan belt wheel 48, which in turn advances the belt 51 to thereby advance or rewind the data tape 42. Data may be transferred to or from the tape 42 by the
5 read/write assembly 45 as the tape passes a recording area in the proximity of the transducer 52.

A preferred embodiment of the capstan motor assembly according to the present invention will now be described with reference to Figs. 3-5. In addition to
10 idler 50, the capstan motor assembly may include a motor 54, a motor extension 56 located on top of the motor 54, and a gear train 58 comprised of a driver gear 60 mounted on top of the extension 56 and a driven gear 62 mounted on top of the idler 50.

15 Motor 54 may be any of various conventional DC brushless capstan drive motors, such as for example that manufactured by Matsushita-Kotobuki Electronics Industries Ltd., of Ehime, Japan, having an output torque of approximately 3.3 inch-ounces. This output
20 force may be varied in alternative embodiments of the invention. Motor extension 56 may be attached to the rotating portion of motor 54, and is provided to locate the driver gear 60 in the same plane as the driven gear 62. The shape and diameter of extension 56 are not
25 critical to the present invention and may be varied in alternative embodiments with the limitation that extension 56 be small enough so as not to contact or otherwise interfere with the operation of the idler 50, with which the extension 56 is preferably coplanar.
30 The extension 56 may be formed integrally with the rotating outer surface of motor 54, or, alternatively, it may be affixed to the outer surface of the motor by screw means and/or adhesives. In an alternative embodiment, the motor extension 56 may be omitted from

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

-8-

the present invention. In this embodiment, gear 60 may be mounted directly to the rotating portion of the motor 54, and provided with a height such that at least a portion of the gear 60 is coplanar with gear 62.

- 5 Gear train 58 may preferably be a conventional spur gear arrangement, where driver gear 60 receives power from motor 54 to drive the driven gear 62. In a preferred embodiment, the axis of rotation of the driver gear and motor is approximately 21.20mm away
10 from the axis of rotation of the driven gear and idler. Further, the radius of the driver gear measured from the axis of rotation to the pitch circle of the gear is 11mm, and the similarly measured radius of the driven gear is 10mm. In a preferred embodiment of the present
15 invention, the motor 54 and gear 60 preferably rotate at 2000 rpm during normal read/write operations and at 3000 rpm during rewind of the data tape. Being 10% smaller, gear 62 rotates at 2200 rpm and 3300 rpm during read/write and rewind, respectively, and outputs
20 a torque of approximately 3 inch-ounces. However, it is understood that in alternative embodiments of the invention, the distance between the axes of rotation of the gears 60 and 62 may be varied, and the ratio of the size of the driver gear to the driven gear may be
25 varied to thereby alter the mechanical advantage of the gear train. Thus, for example, in an alternative embodiment of the present invention, the driven gear 62 may be larger than the driver gear 60. In such an embodiment, the driven gear 62 will have a lower
30 angular velocity and a higher torque than the driver gear 60. Moreover, the gears 60 and 62 may be of the same size, whereby gear 62 has the same angular velocity and torque as gear 60 (but in the opposite direction).

This Sheet Has Been Replaced



-9-

With gears 60 and 62 having the dimensions disclosed in the preferred embodiment above, gears 60 and 62 have 55 and 50 gear teeth, respectively. These numbers may vary in embodiments where the gears have different diameters. As is known in the art, the contour of the teeth is provided so as to minimize wear, vibration and noise. Importantly, there are sufficient numbers of teeth on the gears 60 and 62 so that the gears rotate with a constant angular velocity.

10 In a preferred embodiment, the gears 60 and 62 may both be formed from acetal plastic or santoprene rubber, which materials allow meshing of the gears with a minimum of acoustic noise, and have a high resistance to wear. Similar materials may be used in alternative

15 embodiments. The gears 60 and 62 may be attached to the motor extension 56 and idler 50, respectively, by screw means and/or adhesives. Alternatively, the gears may molded directly onto the motor extension and idler.

As shown on Figs. 2A-5, the capstan motor assembly

20 47 may be mounted on a plate 64, which is in turn mounted on the tape drive base plate 49, so that the plate 64 translates in a direction parallel to the direction of tape insertion into the drive as shown by arrow C-C. A spring 68 is provided to bias plate 64 in

25 a direction opposite to the direction of tape insertion. It is understood that the plate may be biased by other known biasing systems in alternative embodiments of the present invention. In a preferred embodiment, the idler 50 and gear 62 may be fixedly

30 mounted on the plate 64. Fixedly mounted, idler 50 and gear 62 translate with the plate 64, and a constant spacing is maintained between the axis of rotation of the idler 50 and gear 62, and the axis of rotation of the motor 54 and gear 60. As such, gears 60 and 62

-10-

remain in constant meshing engagement. Upon insertion of the cartridge, the capstan belt wheel 48 engages the idler 50. Further insertion of the cartridge moves the plate 64, and the gear train 58 and motor 54 fixedly mounted thereon, rearward against the opposing force of the spring 68. The spring 68 maintains the idler 50 in a pressure contact with the capstan belt wheel 48 while the cartridge is inserted in the drive.

In an alternative embodiment shown in Fig. 2B, idler 50 may be mounted on a swing arm 69 which freely pivots around a pin 70, which pin is mounted to the base 49. Pivotal mounting of the idler on the base 49 allows the idler and gear 62 to move independently of the motor 54, extension 56 and gear 60, all mounted on the plate 64. Such an arrangement provides a substantially equal contact force between the gears 60 and 62 on one hand, and between the idler 50 and the capstan belt wheel 48 on the other. In this embodiment, upon partial insertion of the cartridge 44, the capstan belt wheel 48 within the cartridge engages the idler 50. Further insertion of the cartridge moves the idler 50 rearward to thereby move gear 62 into full meshing engagement with gear 60. The biasing force of spring 68 ensures that the meshing engagement of gears 60 and 62 is maintained, and ensures a pressure contact between idler 50 and capstan belt wheel 48 while the cartridge 44 is inserted within the drive 40.

It has been experimentally determined that significantly more slippage occurs between the drive roller and the idler as compared to between the idler and the capstan belt wheel in conventional capstan motor assemblies. Thus, by replacing the friction based operation of a conventional drive roller and idler with a gear train as described above, the ability

THIS SHEET HAS BEEN
REPLACED

-11-

of the assembly to avoid slippage is significantly improved.

In an alternative embodiment of the present invention shown in Figs. 6A and 6B, the capstan motor
5 assembly 47 is structurally and operationally similar to that described with respect to Figs. 2-5, with the exception that gear 60 is laterally spaced and does not mesh with gear 62. In this embodiment, the motor torque is transmitted from gear 60 to gear 62 by means
10 of a timing belt 65 having a first end looped around gear 60 and a second end looped around gear 62. Timing belt 65 is formed with a plurality of notches 80 spaced from each other so as to mesh with the gear teeth on both gears 60 and 62. Thus, torque from the motor 54
15 may be transmitted to the idler 50 without slippage between the transmission members 60, 62 and 65. In an alternative embodiment, the belt may have a flat inner surface having a high coefficient of friction. In this embodiment, the gears 60 and 62 may be replaced by
20 rollers having uniform circular outer diameters, and similarly preferably formed with high coefficients of friction.

In a preferred embodiment, the axis of rotation of the motor 54, motor extension 56 and gear 60 may be
25 spaced approximately 21.36mm away from the axis of rotation of the idler 50 and gear 62. However, this distance may vary in alternative embodiments.

In embodiments shown in Figs. 6A-7C, the motor 54 and idler 50 may both be fixedly mounted on a plate 64
30 with respect to each other to maintain a constant spacing between the gears 60 and 62. Thus, a constant tension may be maintained within belt 65. Plate 64 is mounted within the tape drive to translate in a direction parallel to the direction of insertion of the

This Sheet Has Been Replaced



-12-

cartridge 44. The plate 64 is biased by a spring 68 in a manner and direction described above to thereby maintain a pressure contact between idler 50 and capstan belt wheel 48 when cartridge 44 is fully
5 inserted within the tape drive.

A further embodiment of the present invention is shown in Figs 7A-7C. This embodiment is similar to that shown in Figs. 6A and 6B, with the exception that the capstan motor assembly 47 in this embodiment
10 operates without the motor extension 56 and without the idler 50. In this embodiment, the gear 60 is mounted directly to the cover of motor 54, and gear 62 is rotationally mounted on a pin 82. Both the stator of motor 54 and the pin 82 are fixedly mounted on plate 64
15 with respect to each other such that the distance between gears 60 and 62 remains constant. Plate 64 is biased by a spring 68 in a manner and direction described above. Gears 60 and 62 are provided in substantially the same plane as the capstan belt wheel
20 48, which plane is substantially perpendicular to the axes of rotation of gear 60, gear 62 and belt wheel 48. As described above, the motor torque is transmitted from gear 60 to gear 62 by means of a timing belt 65 having a first end looped around gear 60 and a second
25 end looped around gear 62. Timing belt 65 resides in substantially the same plane as gears 60 and 62 and belt wheel 48. As shown in Fig. 7C, belt 65 may have an inner surface 65a having notches 80 which mesh with gears 60 and 62 as the gears and belt rotate. However,
30 as previously described, inner surface 65a may alternatively have a smooth surface with a high coefficient of friction. Belt 65 further includes an outer surface 65b similarly having a high coefficient of friction.

THIS SHEET HAS BEEN
REPLACED

-13-

In operation, upon insertion of cartridge 44, capstan belt wheel 48 engages the outer surface 65b of the timing belt 65, which in turn biases the gear 62 and plate 64 rearward. This rearward movement is
5 opposed by the biasing force of spring 68. As result, a pressure contact is established between the outer surface 65b and the capstan belt wheel 48. Due to the high coefficient of friction of outer surface 65b and the pressure contact between surface 65b and belt wheel
10 48, rotation of the timing belt 65 causes rotation of the belt wheel, to thereby advance or rewind the tape 42.

Providing a timing belt 65 as described above with respect to Figs. 6A-7C allows increased flexibility
15 with respect to the location of motor 54 and location of the tape drive components in general. Moreover, with respect to the embodiment shown in Figs. 7A-7C, by redesigning the capstan motor assembly to operate without an idler, the overall height of the tape drive
20 may be advantageously reduced. The overall height of the tape drive in Figs. 7A-7C in a preferred embodiment may be approximately 1.0 inches.

In an alternative embodiment of the capstan motor assembly shown in Fig. 8, the idler 50 and/or gear 62
25 may be mounted on a swing arm 69 which is pivotally mounted to the tape drive base as described above with reference to Figs. 2-5. In this embodiment, insertion of the cartridge will force the idler rearward, but the motor 54 and driver gear 60 remain stationary. A
30 relatively constant spacing must be maintained between the gears 60 and 62 so that belt 65 remains taut. Thus, in this embodiment motor 54 and gear 60 may be located within the drive such that a line 82 through the center of the capstan belt wheel and gear 62 is

This Sheet Has Been Replaced



-14-

near to orthogonal to a line 84 through the center of gear 60 and gear 62. With this orientation, rearward movement of idler 50 upon cartridge insertion will minimally change the spacing between gears 60 and 62.

5 In this embodiment, the swing arm 69 may be biased by a spring 68 as previously described to oppose the force exerted on the idler 50 and/or gear 62 by the belt 65, to thereby ensure a pressure contact between the idler 50 or belt 65 and the capstan belt wheel.

10 In a further embodiment of the present invention, the motor 54 may not have the same axis of rotation as the driver gear 60. In this embodiment, a timing belt as described above may be used to transmit the motor force from the motor to the driver gear. Similarly,
15 where the axes of rotation of the motor and driver gear are not coextensive, one or more additional gears may be added to the system to transmit the motor force from the motor to the gear 60.

Although the invention has been described in
20 detail herein, it should be understood that the invention is not limited to the embodiments herein disclosed. Various changes, substitutions and modifications may be made thereto by those skilled in the art without departing from the spirit or scope of
25 the invention as described and defined by the appended claims.



THIS SHEET HAS BEEN
REPLACED

-15-

WE CLAIM:

1. A tape drive, comprising:
 - a housing including a slot in one surface for receiving a tape cartridge therein;
 - transducing means for transferring data to and from a data tape within said tape cartridge;
 - a capstan motor assembly for driving a tape advance mechanism within said tape cartridge, said capstan motor assembly including:
 - a motor mounted within said housing for supplying power,
 - a gear assembly mounted adjacent to said motor, said motor rotating said gear assembly, and
 - roller means adjacent to said gear assembly for engaging said tape advance mechanism, said gear assembly rotating said roller means; and
 - control means for providing control signals to said capstan motor assembly and for providing control signals to, and for transferring data to and from, said transducing means.
2. A tape drive as recited in claim 1, wherein said gear assembly comprises a first gear and a second gear, said first gear sharing a common axis of rotation with and affixed to said motor and said second gear sharing a common axis with and affixed to said roller means, said first gear meshing with and driving said second gear to transfer said power from said motor to said roller means.
3. A tape drive as recited in claim 2, further comprising an extension fixedly mounted on said motor, said first gear fixedly mounted on said extension, said

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

-16-

extension provided to locate said first gear in a plane of the second gear.

4. A tape drive as recited in claim 1, said gear assembly comprising a first gear and a second gear, said first gear having a first axis of rotation, said second gear having a second axis of rotation, said motor having a third axis of rotation, said first, second and third axes of rotation being parallel and not coextensive with each other, said tape drive further comprising power transfer means between said motor and said first gear for transferring said power from said motor to said first gear, said first gear meshing with and driving said second gear, and said second gear causing rotation of said roller means.

5. A tape drive as recited in claim 4, wherein said power transfer means comprises a belt attached between said motor and said first gear.

6. A tape drive as recited in claim 4, wherein said power transfer means comprises a second assembly of gears between said motor and said first gear.

7. A capstan motor assembly of a tape drive for driving a tape advance mechanism within a tape cartridge, said assembly comprising:

a motor mounted within the tape drive for supplying power;

a gear assembly mounted adjacent to said motor, said motor rotating said gear assembly; and

roller means adjacent to said gear assembly for engaging the tape advance mechanism, said gear assembly rotating said roller means.





THIS SHEET HAS BEEN
REPLACED

-17-

8. A capstan motor assembly as recited in claim 7, wherein said gear assembly comprises a first gear and a second gear, said first gear sharing a common axis of rotation with and affixed to said motor and said second gear sharing a common axis with and affixed to said roller means, said first gear meshing with and driving said second gear to transfer said power from said motor to said roller means.

9. A capstan motor assembly as recited in claim 8, further comprising an extension fixedly mounted on said motor, said first gear fixedly mounted on said extension, said extension provided to locate said first gear in a plane of the second gear.

10. A capstan motor assembly as recited in claim 7, said gear assembly comprising a first gear and a second gear, said first gear having a first axis of rotation, said second gear having a second axis of rotation, said motor having a third axis of rotation, said first, second and third axes of rotation being parallel and not coextensive with each other, said tape drive further comprising power transfer means between said motor and said first gear for transferring said power from said motor to said first gear, said first gear meshing with and driving said second gear, and said second gear causing rotation of said roller means.

11. A capstan motor assembly as recited in claim 10, wherein said power transfer means comprises a belt attached between said motor and said first gear.

12. A capstan motor assembly as recited in claim 10, wherein said power transfer means comprises a second





THIS SHEET HAS BEEN
REPLACED

-18-

assembly of gears between said motor and said first gear.

13. A capstan motor assembly for driving a tape advance mechanism within a tape cartridge, comprising:
a motor for supplying power to advance the tape;
a first gear affixed to said motor and having a common axis of rotation with said motor;
a second gear in meshing engagement with said first gear, said first gear driving said second gear;
an idler for rotating the tape advance mechanism, said second gear fixedly mounted on said idler and having a common axis of rotation with said idler.

14. A capstan motor assembly for engaging a tape advance mechanism of a tape cartridge upon insertion of the cartridge into a tape drive, said assembly comprising:

a plate mounted on a base of the tape drive for translational movement parallel to a direction of insertion of the cartridge into the tape drive;

biasing means for biasing said plate in a direction opposite to the direction of insertion of the cartridge;

a motor mounted on said plate for supplying power to advance the tape;

a first gear mounted on said motor;

a second gear in meshing engagement with said first gear, said first gear driving said second gear;

an unbiased pivot arm mounted to freely pivot on said base;

an idler rotatably mounted on said unbiased pivot arm, said second gear fixedly mounted on and rotating said idler, said idler provided for contacting the tape

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

-19-

advance mechanism so that rotation of said idler moves the tape advance mechanism.

15. A capstan motor assembly as recited in claim 14, wherein said biasing means establishes a contact force between said first and second gears and between said idler and the tape advance mechanism.

16. A capstan motor assembly as recited in claim 15, wherein said unbiased pivot arm allows said contact force between said first gear and said second to be substantially the same as said contact force between said idler and the tape advance mechanism.

17. A capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

a motor for supplying power to advance the tape;

a first gear adjacent to said motor;

a second gear coplanar with and spaced from said first gear;

belt means having a first end looped around said first gear and a second end looped around said second gear, said first gear rotating said belt means, said belt means rotating said second gear;

an idler for engaging the tape advance mechanism to move the tape, said second gear fixedly mounted on and rotating said idler.

18. a capstan motor assembly as recited in claim 17, wherein said first gear is fixedly mounted and coaxial with said motor.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

-20-

19. A capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

- a motor for supplying power to advance the tape;
- a first gear adjacent to said motor;

- rotating means mounted within the tape drive spaced from and coplanar with said first gear;

- belt means having a first end looped around said first gear and a second end looped around said rotating means, said first gear rotating said belt means, said belt means provided to rotatably engage the tape advance mechanism at said second end to move the tape.

20. a capstan motor assembly as recited in claim 19, wherein said first gear is fixedly mounted and coaxial with said motor.

21. A capstan motor assembly for engaging a tape advance mechanism of a tape cartridge upon insertion of the cartridge into a tape drive, said assembly comprising:

- a plate mounted on a base of the tape drive for translational movement parallel to a direction of insertion of the cartridge into the tape drive;

- biasing means for biasing said plate in a direction opposite to the direction of insertion of the cartridge;

- a motor fixedly mounted on said plate for supplying power to advance the tape;

- a first gear affixed to said motor and having a common axis of rotation with said motor;

- a second gear in meshing engagement with said first gear, said first gear driving said second gear;





THIS SHEET HAS BEEN
REPLACED

-21-

an idler fixedly mounted on said plate for contacting the tape advance mechanism, said second gear fixedly mounted on said idler and having a common axis of rotation with said idler.

22. A capstan motor assembly as recited in claim 21, wherein contact of the tape moving mechanism against said idler moves said plate.

This Sheet Has Been Replaced



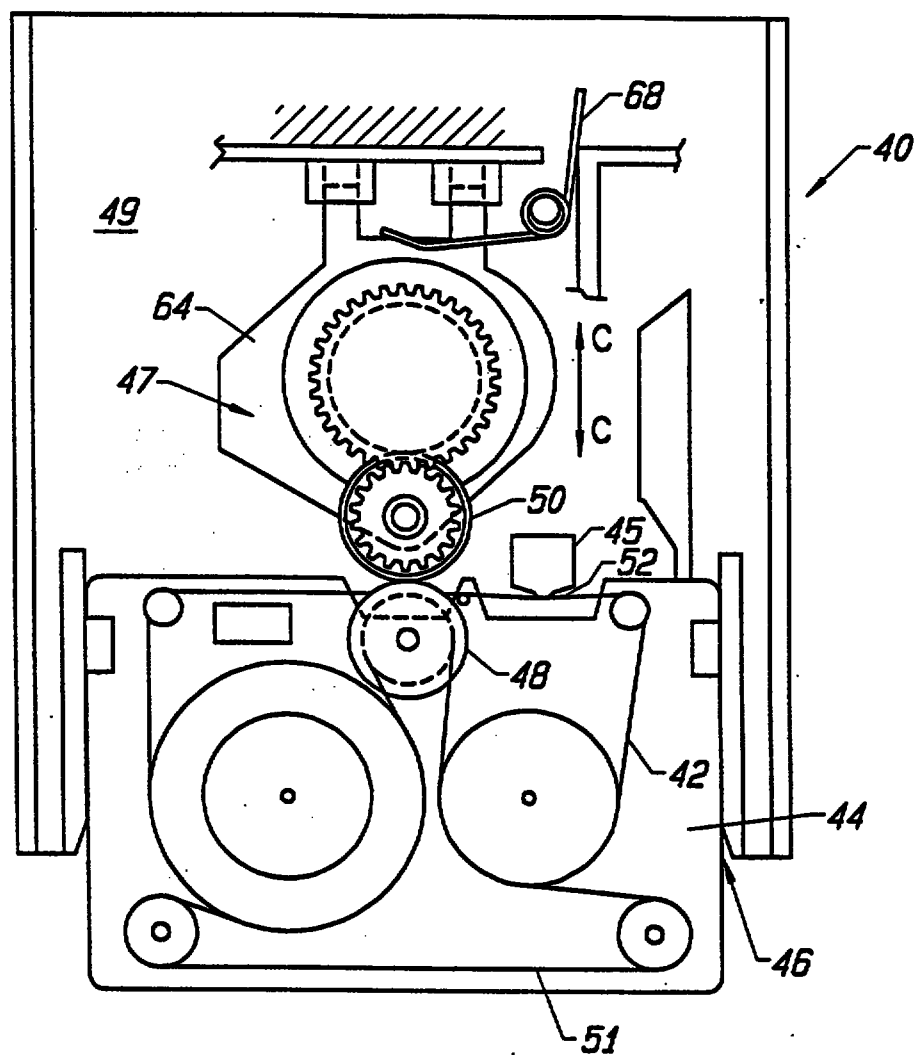
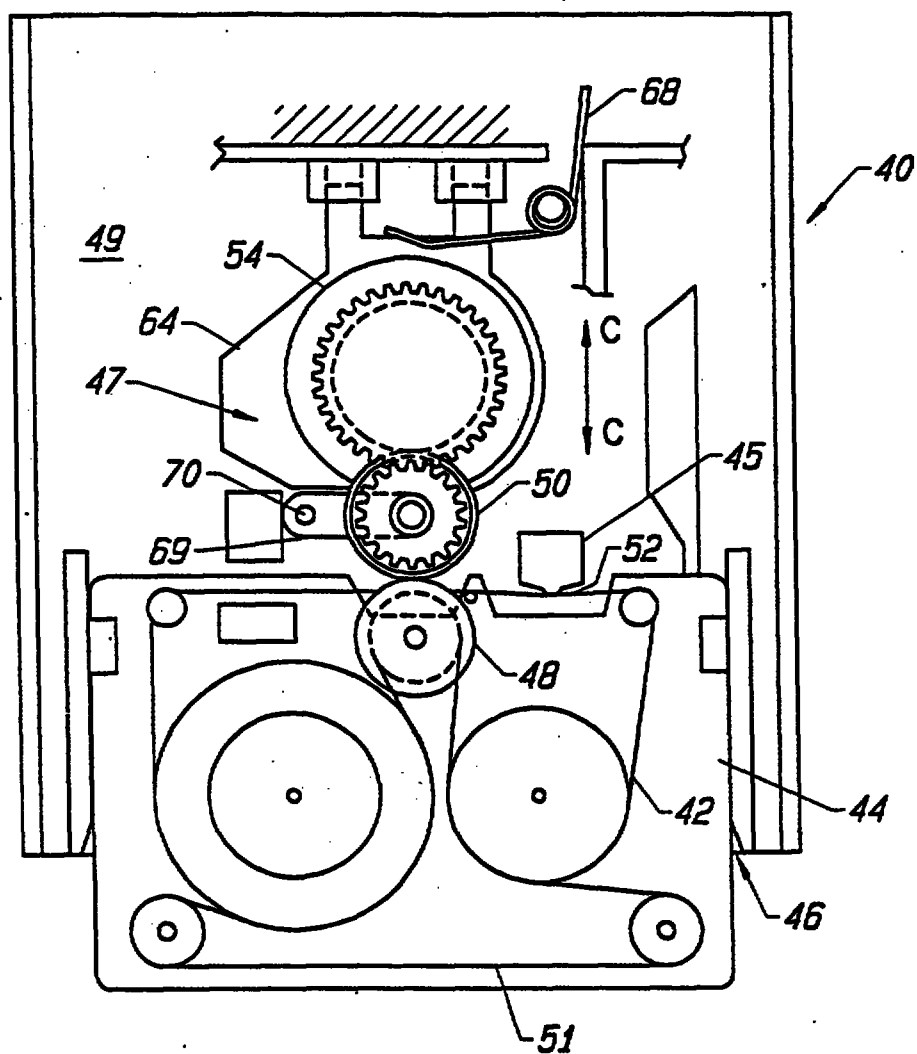


FIG. 2A



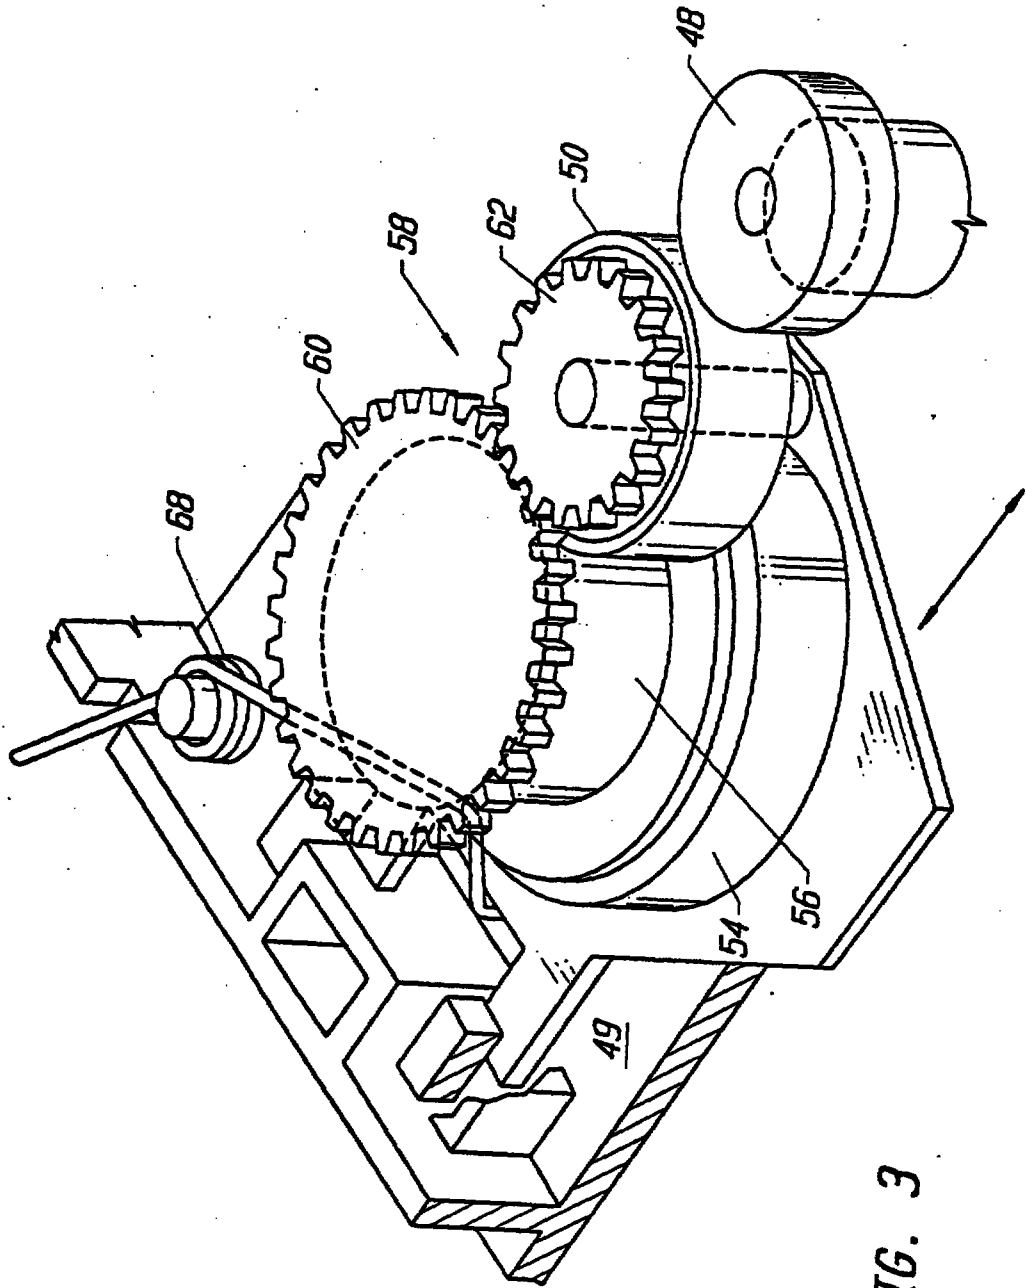


FIG. 3

5/8

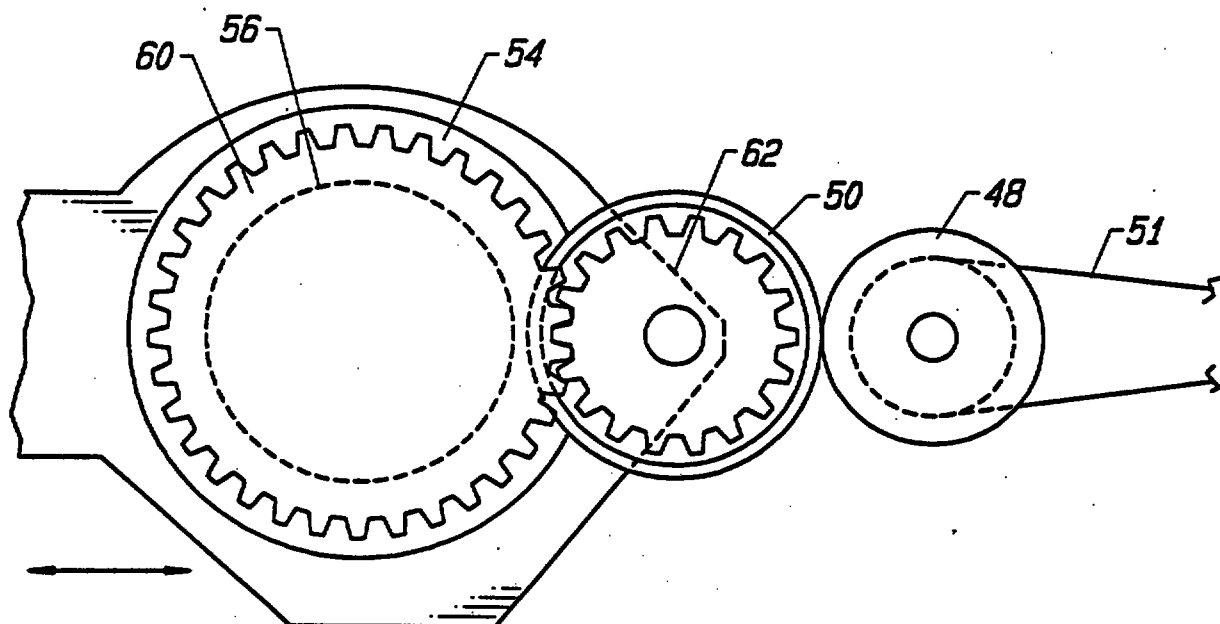


FIG. 4

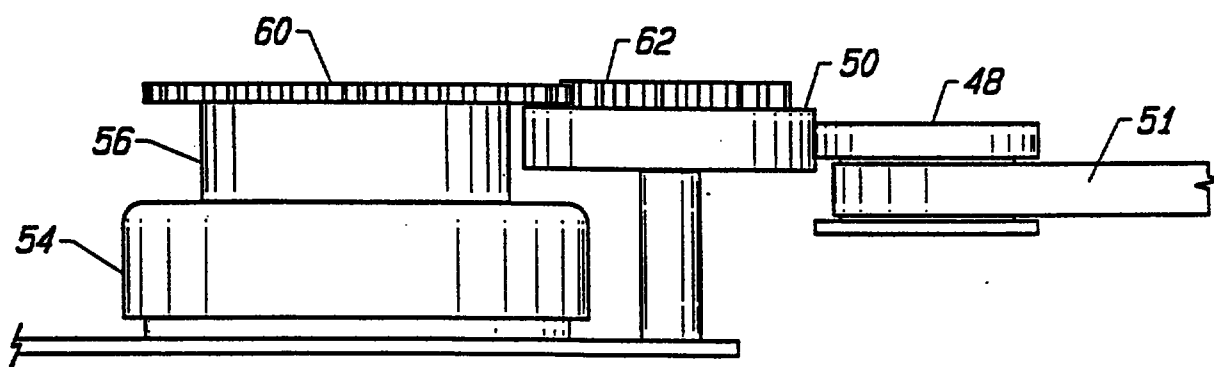


FIG. 5

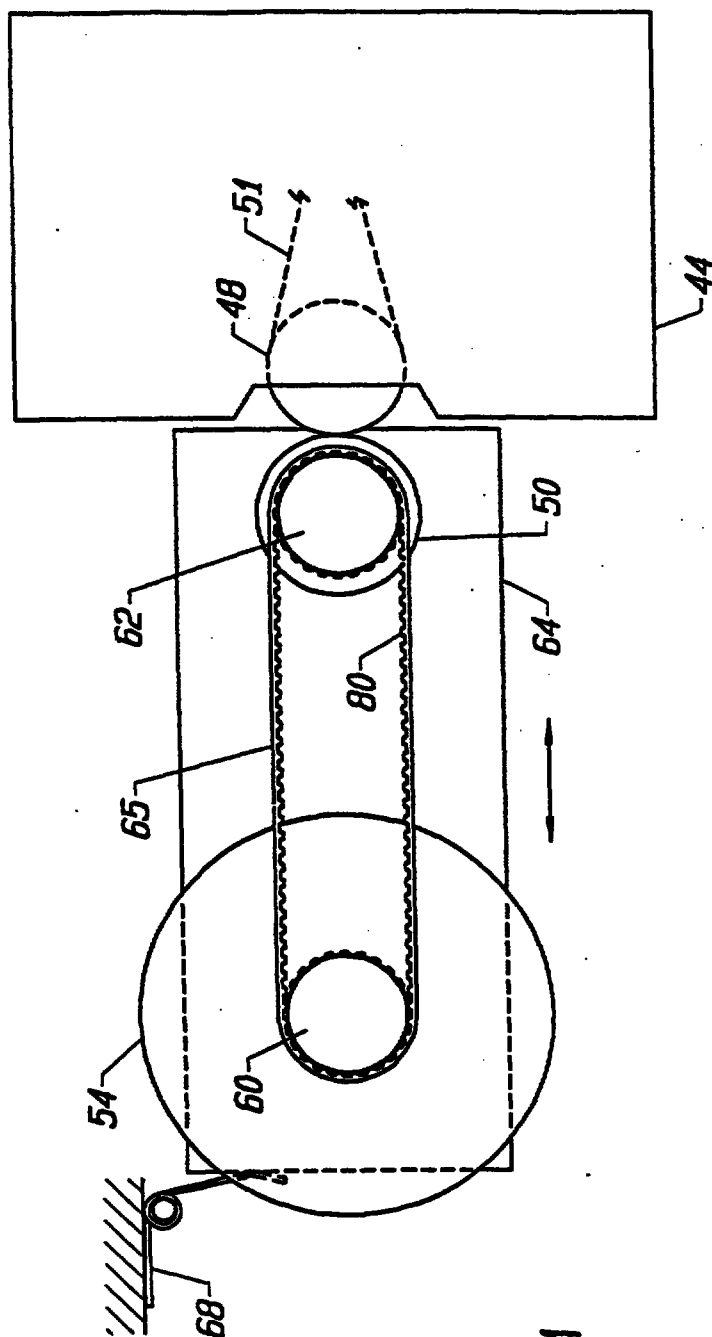


FIG. 6A

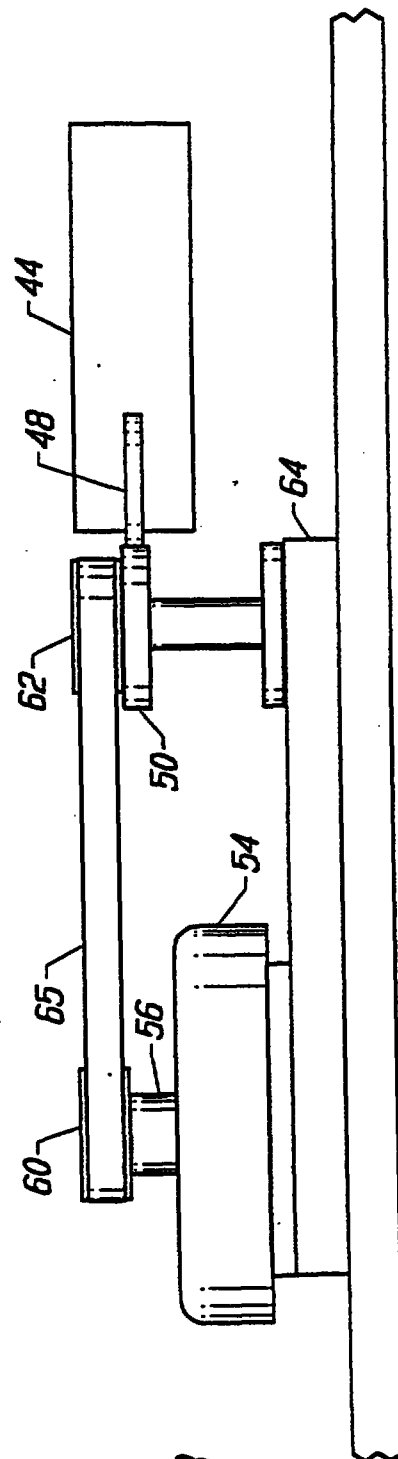


FIG. 6B

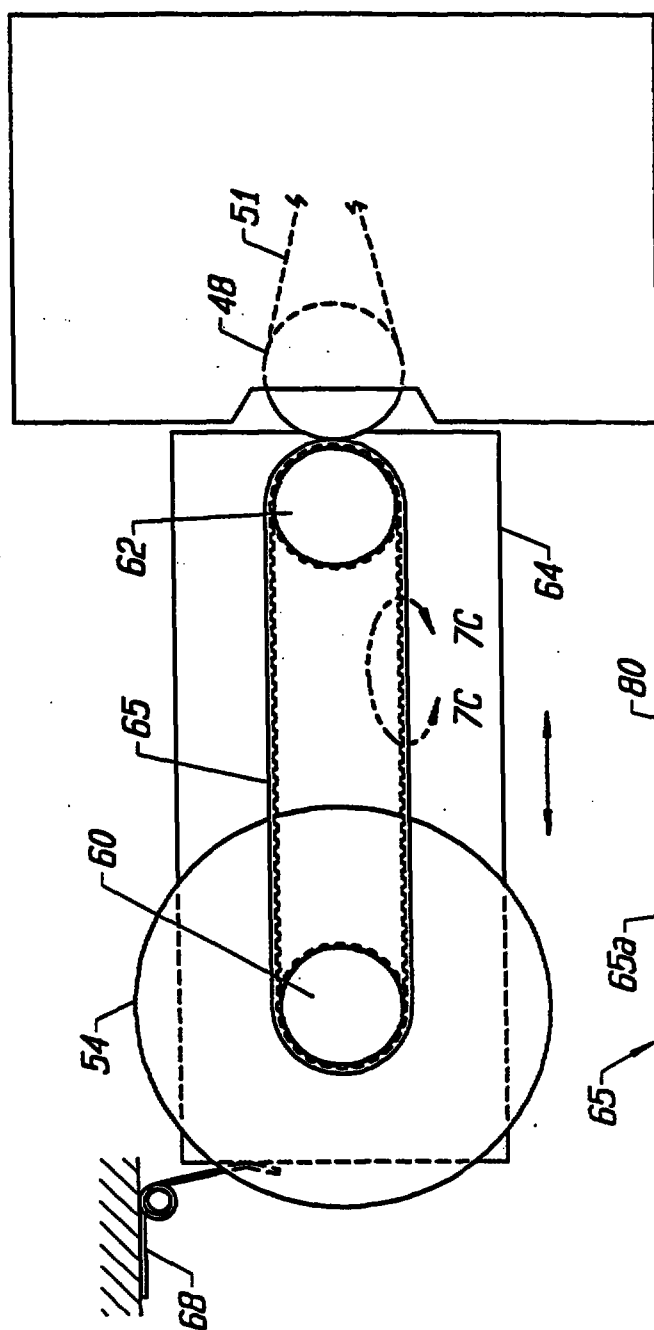


FIG. 7A

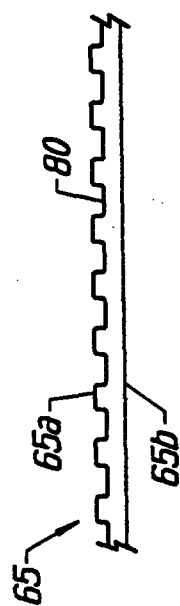


FIG. 7C

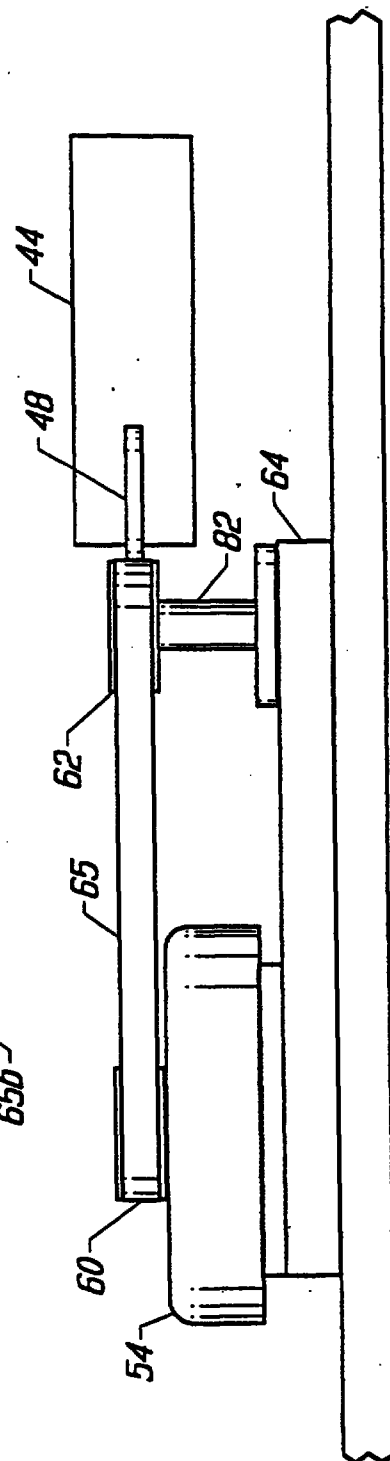


FIG. 7B

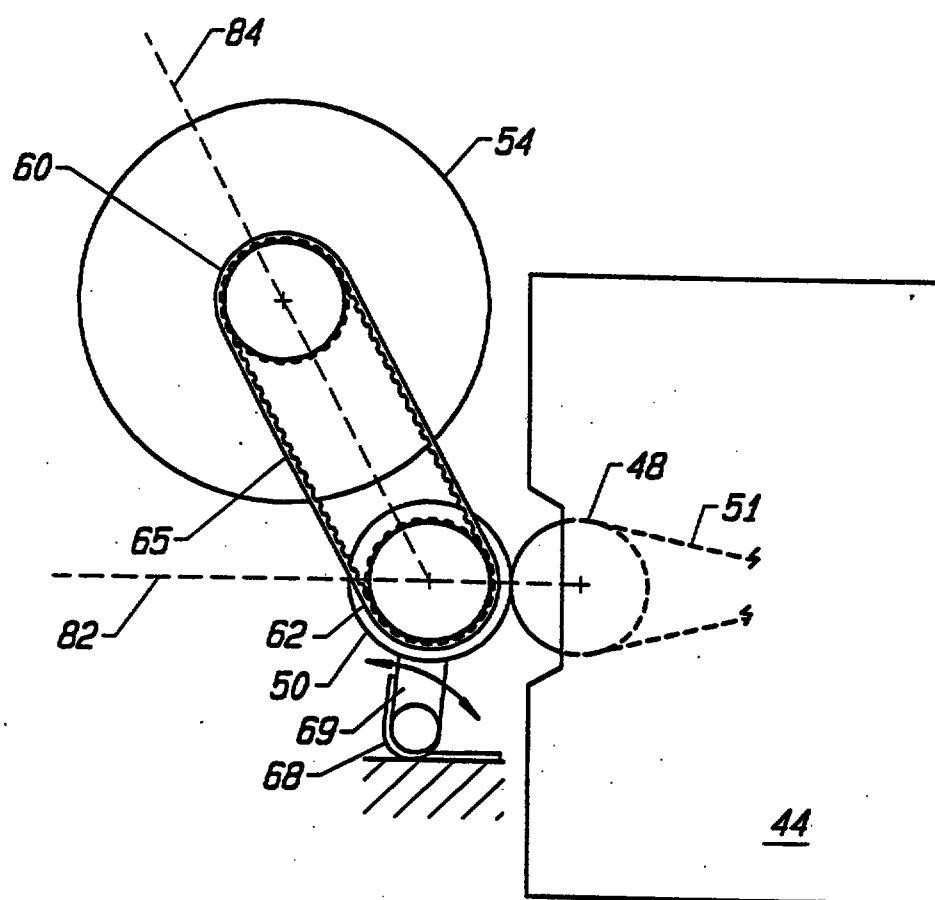


FIG. 8

11 10 05 95

-1-

MECHANISM FOR MOVING
A TAPE WITHIN A TAPE DRIVE

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a tape drive capstan motor assembly for moving a tape within a tape cartridge, and more particularly to a capstan motor
10 assembly including an intermeshing gear train for transmitting motor torque from the motor to the tape driver without slippage between the elements.

Description of the Related Art

15 Tape drives are widely used in data processing systems for applications including primary data storage, archival data storage, journaling, and most significantly, as a back-up data storage device to the system's hard drive. Conventional tape drives are
20 designed to transfer data to and from a length of magnetically encoded tape, typically 6.35mm (1/4 inch) in width, which tape is transferred between a supply reel and a take-up reel. Currently, most 3 1/4 inch form factor tape drives utilize a so called "minicartridge"
25 cassette tape for data storage. This type of cartridge is generally described in American National Standard ANSI 3.55-1977.

In conventional tape drive operation, as shown in Fig. 1, the data tape 10 within the cartridge 12
30 travels from a supply reel 13, past a front face of the cartridge, and is stored on a take-up reel 14. The tape is advanced between the take-up and supply reels by means of a belt 16 within the cartridge. The belt is wrapped around a capstan belt wheel 17 within the

cassette which is driven by a capstan motor assembly 18 within the tape drive.

As shown in Fig. 1, a conventional capstan motor assembly 18 includes a capstan drive roller 20
5 rotatably engaging an idler 22. Idler 22 is small enough so that a portion of the idler may be received through the opening 29 in the front face of cartridge 12 to thereby contact the capstan belt wheel 17 within the cartridge 12. When the cartridge 12 is properly
10 inserted within the drive, the capstan belt wheel pushes against the idler 22, which in turn pushes against the drive roller 20, thus creating a pressure contact between the capstan belt wheel 17 and idler 22, and between idler 22 and drive roller 20. A motor 24
15 causes rotation of the capstan drive roller 20. The roller 20 rotates idler 22, which in turn rotates wheel 17 so as to advance the tape 10.

In conventional capstan motor assemblies, the idler 22 may be supported on one end of a swinging link
20 22A so as to pivot about a pivot point 25 in a direction indicated by arrow A-A. The capstan motor 24, drive roller 20, and pivot point 25 may further be supported on a plate 27, which is also provided to pivot about a pivot point 31 in the direction of arrow
25 B-B. Allowing the plate 27 and link 22A to pivot provides a substantially equal contact pressure between the drive wheel 20 and the idler 22, and between idler 22 and the capstan belt wheel 17. A system such as that described above is also disclosed in PCT published
30 application No. WO-92/22058 to Perona.

Conventionally, at least the outer circular surface of idler 22 is covered with an elastic material having a high coefficient of friction. This material is provided to prevent slippage between the idler and

the drive roller, and between the idler and the capstan belt wheel as those elements rotate in contact with each other. Some systems, such as that disclosed in European Patent Application No. 0 488 760 A2, additionally disclose a belt having one end wrapped around the drive roller and a second end wrapped around the idler, so that the idler is driven by the drive roller via the belt. Again, in system including such a belt, the belt and/or the drive roller and idler have engaging surfaces formed of elastic with a high coefficient of friction to prevent slippage.

A problem with conventional capstan motor assemblies is that, over time, the circular surfaces of the capstan drive roller, the idler and/or the capstan belt wheel may become worn, and particulate matter may lodge between the elements, thereby deforming the circular shape of the elements. Moreover, dirt may accumulate on the elements, thereby decreasing the frictional force between adjacent contacting surfaces. All of these occurrences tend to cause slippage between the drive roller and idler, and between the idler and the capstan belt wheel. Slippage inhibits drive performance for several reasons. Significantly, it is very important to both monitor and control the speed with which the data tape advances past the recording area. When slippage occurs, there is no way to accurately control and maintain the speed of the advancing tape. Moreover, particularly during a recording cycle, the rotational speed of the capstan motor is often used to monitor the translational speed of the data tape. However, when slippage occurs, the motor speed will not accurately reflect the speed of the data tape. A loss of the ability to control and/or

THIS SHEET HAS BEEN
REPLACED

-3a-

monitor the tape speed may result in read/write errors or even drive failure in extreme cases.

SUMMARY OF THE INVENTION

5 It is therefore an object of the present invention to provide a tape drive wherein the speed of the advancing data tape may be accurately controlled and monitored over prolonged use of the drive.

10 It is a further object of the present invention to provide a tape drive including a capstan motor assembly for preventing slippage between the capstan drive roller and the driven idler.

AMENDED SHEET

DESCRIPTION OF BEST MODE OF THE INVENTION

The invention will now be described with reference to Figs. 1 - 8, which relate in general to a tape drive 40 for transferring data to and from a data tape 42 within a cartridge 44. The tape drive includes a novel design for the capstan motor assembly, which, in a preferred embodiment of the present invention, may be utilized within a 3½ inch form factor tape drive. However, it is understood that the present invention may be utilized in tape drives of various sizes and designs and may operate with any data tape recording technique, including longitudinal, helical and arcuate scan recording. In a preferred embodiment, the present invention operates with a conventional industry standard minicartridge data tape cartridge 44. However, the present invention is not limited to operation with a minicartridge, and may operate with tape cartridges of various sizes and designs.

Referring now to Figs. 2A and 2B, there is shown a tape drive 40 according to the present invention. The cartridge 44 is inserted into the drive through a slot 46 formed in a front surface of the drive housing. The drive 40 includes a capstan motor assembly 47 for advancing and rewinding the data tape 42, and a read/write assembly 45 for transferring data to and from the data tape 42. Upon full insertion of the cartridge 44 into the drive as shown in Fig. 2A, a capstan belt wheel 48 located within the cartridge is adjacent to and in contacting relation with an idler 50 of the capstan motor assembly 47. In the loaded position, a section of the tape 42 is exposed to and located adjacent a read/write transducer 52 of the read/write assembly 45. In response to power and control signals received from a printed circuit board

(not shown), the capstan motor assembly 47 rotates the capstan belt wheel 48, which in turn advances the belt 51 to thereby advance or rewind the data tape 42. Data may be transferred to or from the tape 42 by the
5 read/write assembly 45 as the tape passes a recording area in the proximity of the transducer 52.

A preferred embodiment of the capstan motor assembly according to the present invention will now be described with reference to Figs. 3-5. In addition to
10 idler 50, the capstan motor assembly may include a motor 54, a motor extension 56 located on top of the motor 54, and a gear train 58 comprised of a driver gear 60 mounted on top of the extension 56 and a driven gear 62 mounted on top of the idler 50.

15 Motor 54 may be any of various conventional DC brushless capstan drive motors, such as for example that manufactured by Matsushita-Kotobuki Electronics Industries Ltd., of Ehime, Japan, having an output torque of approximately 2.37 gram-meters (3.3 inch-
20 ounces). This output force may be varied in alternative embodiments of the invention. Motor extension 56 may be attached to the rotating portion of motor 54, and is provided to locate the driver gear 60 in the same plane as the driven gear 62. The shape and
25 diameter of extension 56 are not critical to the present invention and may be varied in alternative embodiments with the limitation that extension 56 be small enough so as not to contact or otherwise interfere with the operation of the idler 50, with
30 which the extension 56 is preferably coplanar. The extension 56 may be formed integrally with the rotating outer surface of motor 54, or, alternatively, it may be affixed to the outer surface of the motor by screw

-7a-

means and/or adhesives. In an alternative embodiment, the motor extension 56 may be omitted from

AMENDED SHEET

the present invention. In this embodiment, gear 60 may be mounted directly to the rotating portion of the motor 54, and provided with a height such that at least a portion of the gear 60 is coplanar with gear 62.

5 Gear train 58 may preferably be a conventional spur gear arrangement, where driver gear 60 receives power from motor 54 to drive the driven gear 62. In a preferred embodiment, the axis of rotation of the driver gear and motor is approximately 21.20mm away
10 from the axis of rotation of the driven gear and idler. Further, the radius of the driver gear measured from the axis of rotation to the pitch circle of the gear is 11mm, and the similarly measured radius of the driven gear is 10mm. In a preferred embodiment of the present
15 invention, the motor 54 and gear 60 preferably rotate at 2000 rpm during normal read/write operations and at 3000 rpm during rewind of the data tape. Being 10% smaller, gear 62 rotates at 2200 rpm and 3300 rpm during read/write and rewind, respectively, and outputs
20 a torque of approximately 2.16 gram-meters (3 inch-ounces). However, it is understood that in alternative embodiments of the invention, the distance between the axes of rotation of the gears 60 and 62 may be varied, and the ratio of the size of the driver gear to the
25 driven gear may be varied to thereby alter the mechanical advantage of the gear train. Thus, for example, in an alternative embodiment of the present invention, the driven gear 62 may be larger than the driver gear 60. In such an embodiment, the driven gear
30 62 will have a lower angular velocity and a higher torque than the driver gear 60. Moreover, the gears 60 and 62 may be of the same size, whereby gear 62 has the same angular velocity and torque as gear 60 (but in the opposite direction).

of the assembly to avoid slippage is significantly improved.

In an alternative embodiment of the present invention shown in Figs. 6A and 6B, the capstan motor assembly 47 is structurally and operationally similar to that described with respect to Figs. 2A-5, with the exception that gear 60 is laterally spaced and does not mesh with gear 62. In this embodiment, the motor torque is transmitted from gear 60 to gear 62 by means of a timing belt 65 having a first end looped around gear 60 and a second end looped around gear 62. Timing belt 65 is formed with a plurality of notches 80 spaced from each other so as to mesh with the gear teeth on both gears 60 and 62. Thus, torque from the motor 54 may be transmitted to the idler 50 without slippage between the transmission members 60, 62 and 65. In an alternative embodiment, the belt may have a flat inner surface having a high coefficient of friction. In this embodiment, the gears 60 and 62 may be replaced by rollers having uniform circular outer diameters, and similarly preferably formed with high coefficients of friction.

In a preferred embodiment, the axis of rotation of the motor 54, motor extension 56 and gear 60 may be spaced approximately 21.36mm away from the axis of rotation of the idler 50 and gear 62. However, this distance may vary in alternative embodiments.

In embodiments shown in Figs. 6A-7C, the motor 54 and idler 50 may both be fixedly mounted on a plate 64 with respect to each other to maintain a constant spacing between the gears 60 and 62. Thus, a constant tension may be maintained within belt 65. Plate 64 is mounted within the tape drive to translate in a direction parallel to the direction of insertion of the

In operation, upon insertion of cartridge 44, capstan belt wheel 48 engages the outer surface 65b of the timing belt 65, which in turn biases the gear 62 and plate 64 rearward. This rearward movement is
5 opposed by the biasing force of spring 68. As result, a pressure contact is established between the outer surface 65b and the capstan belt wheel 48. Due to the high coefficient of friction of outer surface 65b and the pressure contact between surface 65b and belt wheel
10 48, rotation of the timing belt 65 causes rotation of the belt wheel, to thereby advance or rewind the tape 42.

Providing a timing belt 65 as described above with respect to Figs. 6A-7C allows increased flexibility
15 with respect to the location of motor 54 and location of the tape drive components in general. Moreover, with respect to the embodiment shown in Figs. 7A-7C, by redesigning the capstan motor assembly to operate without an idler, the overall height of the tape drive
20 may be advantageously reduced. The overall height of the tape drive in Figs. 7A-7C in a preferred embodiment may be approximately 2.54cm (1.0 inches).

In an alternative embodiment of the capstan motor assembly shown in Fig. 8, the idler 50 and/or gear 62
25 may be mounted on a swing arm 69 which is pivotally mounted to the tape drive base as described above with reference to Figs. 2-5. In this embodiment, insertion of the cartridge will force the idler rearward, but the motor 54 and driver gear 60 remain stationary. A
30 relatively constant spacing must be maintained between the gears 60 and 62 so that belt 65 remains taut. Thus, in this embodiment motor 54 and gear 60 may be located within the drive such that a line 82 through the center of the capstan belt wheel and gear 62 is



WE CLAIM:

1. A tape drive (40) including a housing having a slot (46) in one surface for receiving a tape cartridge (44) therein, transducing means (52) for transferring data to and from a data tape (42) within the tape cartridge (44), a capstan motor assembly (47) for driving a tape advance mechanism (48) within the tape cartridge (44), a motor (54) for supplying power to the capstan motor assembly (47), roller means (50) within the capstan motor assembly (47) for engaging the tape advance mechanism (48), and control means for providing control signals to the capstan motor assembly (47) and for providing control signals to, and for transferring data to and from, the transducing means (52), the improvement comprising:

a gear assembly (58) mounted adjacent to said motor (54) and driven by said motor (54), said gear assembly (58) rotating said roller means (50).

2. A tape drive (40) as recited in claim 1, wherein said gear assembly (58) comprises a first gear (60) and a second gear (62), said first gear (60) sharing a common axis of rotation with and affixed to said motor (54) and said second gear (62) sharing a common axis with and affixed to said roller means (50), said first gear (60) meshing with and driving said second gear (62) to transfer said power from said motor (54) to said roller means (50).

3. A tape drive (40) as recited in claim 2, further comprising an extension (56) fixedly mounted on said motor (54), said first gear (60) fixedly mounted on said extension (56), said extension (56) provided to



locate said first gear (60) in a plane of the second gear (62).

4. A tape drive (40) as recited in claim 1, said gear assembly (58) comprising a first gear (60) and a second gear (62), said first gear (60) having a first axis of rotation, said second gear (62) having a second axis of rotation, said motor (54) having a third axis of rotation, said first, second and third axes of rotation being parallel and not coextensive with each other, said tape drive (40) further comprising power transfer means between said motor (54) and said first gear (60) for transferring said power from said motor (54) to said first gear (60), said first gear (60) meshing with and driving said second gear (62), and said second gear (62) causing rotation of said roller means (50).

5. A tape drive (40) as recited in claim 4, wherein said power transfer means comprises a belt attached between said motor (54) and said first gear (60).

6. A tape drive (40) as recited in claim 4, wherein said power transfer means comprises a second assembly of gears between said motor (54) and said first gear (60).

7. A capstan motor assembly (47) of a tape drive (40) for driving a tape advance mechanism (48) within a tape cartridge (44), the capstan motor assembly (47) including a support means (64), a motor (54), mounted on the support means (64), for supplying power, and roller means (50) for engaging the tape advance mechanism (48), the improvement comprising:



a gear assembly (58) mounted adjacent to the motor (54) and being rotated by said motor (54), said roller means (50) being adjacent to and rotated by said gear assembly (58).

8. A capstan motor assembly (47) as recited in claim 7, wherein said gear assembly (58) comprises a first gear (60) and a second gear (62), said first gear (60) sharing a common axis of rotation with and affixed to said motor (54) and said second gear (62) sharing a common axis with and affixed to said roller means (50), said first gear (60) meshing with and driving said second gear (62) to transfer said power from said motor (54) to said roller means (50).

9. A capstan motor assembly (47) as recited in claim 8, further comprising an extension (56) fixedly mounted on said motor (54), said first gear (60) fixedly mounted on said extension (56), said extension (56) provided to locate said first gear (60) in a plane of the second gear (62).

10. A capstan motor assembly (47) as recited in claim 7, said gear assembly (58) comprising a first gear (60) and a second gear (62), said first gear (60) having a first axis of rotation, said second gear (62) having a second axis of rotation, said motor (54) having a third axis of rotation, said first, second and third axes of rotation being parallel and not coextensive with each other, said tape drive (40) further comprising power transfer means between said motor (54) and said first gear (60) for transferring said power from said motor (54) to said first gear (60), said first gear (60) meshing with and driving said second gear (62), and



said second gear (62) causing rotation of said roller means (50).

11. A capstan motor assembly (47) as recited in claim 10, wherein said power transfer means comprises a belt attached between said motor (54) and said first gear (60).

12. A capstan motor assembly (47) as recited in claim 10, wherein said power transfer means comprises a second assembly of gears between said motor (54) and said first gear (60).

13. A capstan motor assembly (47) as recited in claim 7, said gear assembly (58) comprising:

a first gear (60) affixed to said motor (54) and having a common axis of rotation with said motor (54); and

a second gear (62) in meshing engagement with said first gear (60), said first gear (60) driving said second gear (62).

14. A tape drive (40) as recited in claim 1, said gear assembly (58) comprising a first gear (60) mounted on said motor (54), and a second gear (62) in meshing engagement with, and driven by, said first gear (60), further comprising:

a plate (64) mounted on a base (49) of the tape drive (40) for translational movement parallel to a direction of insertion of the cartridge (44) into the tape drive (40), said motor (54) mounted on said plate (64);



biasing means (68) for biasing said plate (64) in a direction opposite to the direction of insertion of the cartridge (44);

an unbiased pivot arm (69) mounted to freely pivot on said base (49), said roller means (50) rotatably mounted on said unbiased pivot arm (69) and said second gear (62) fixedly mounted on and rotating said roller means (50), said roller means (50) provided for contacting the tape advance mechanism (48) so that rotation of said roller means (50) moves the tape advance mechanism (48).

15. A capstan motor assembly (47) as recited in claim 14, wherein said biasing means (68) establishes a contact force between said first and second gears (60, 62) and between said roller means (50) and the tape advance mechanism (48).

16. A capstan motor assembly (47) as recited in claim 15, wherein said unbiased pivot arm (69) allows said contact force between said first gear (60) and said second gear (62) to be substantially the same as said contact force between said roller means (50) and the tape advance mechanism (48).

17. A capstan motor assembly (47) as recited in claim 7, said gear assembly (58) comprising:

- a first gear (60) adjacent to said motor (54);
- a second gear (62) coplanar with and spaced from said first gear (60); and

- belt means (65) having a first end looped around said first gear (60) and a second end looped around said second gear (62), said first gear (60) rotating said belt means (65), said belt means (65) rotating



-20-

said second gear (62) and said second gear (62) rotating said roller means (50).

18. A capstan motor assembly (47) as recited in claim 17, wherein said first gear (60) is fixedly mounted and coaxial with said motor (54).

19. A capstan motor assembly (47) for engaging a tape advance mechanism (48) within a tape cartridge (44) to move a data tape (42), the capstan motor assembly (47) including a motor (54) for supplying power to advance the tape, the improvement comprising:

- a first gear (60) adjacent to said motor (54);
- rotating means (62) mounted within the tape drive (40) spaced from and coplanar with said first gear (60);

- belt means (65) having a first end looped around said first gear (60) and a second end looped around said rotating means, said first gear (60) rotating said belt means (65), said belt means (65) provided to rotatably engage the tape advance mechanism (48) at said second end to move the tape.

20. A capstan motor assembly (47) as recited in claim 19, wherein said first gear (60) is fixedly mounted and coaxial with said motor (54).

21. A tape drive (40) as recited in claim 1, said gear assembly (58) comprising a first gear (60) mounted on said motor (54), and a second gear (62) in meshing engagement with, and driven by, said first gear (60), further comprising:

- a plate (64) mounted on a base (49) of the tape drive (40) for translational movement parallel to a

AMENDED SHEET



-21-

direction of insertion of the cartridge (44) into the tape drive (40), said motor (54) mounted on said plate (64); and

biasing means (68) for biasing said plate (64) in a direction opposite to the direction of insertion of the cartridge (44);

wherein said roller means (50) is fixedly mounted on said plate (64) for contacting the tape advance mechanism (48), said second gear (62) fixedly mounted on said roller means (50) and having a common axis of rotation with said roller means (50).

22. A capstan motor assembly (47) as recited in claim 21, wherein contact of the tape moving mechanism against said roller means (50) moves said plate (64).

THIS SHEET HAS BEEN
REPLACED

- 3 -

REPLACEMENT SHEETS SG
☒ Description : paged 3 to paged 58
☒ Claim(s) : paged 22 to paged
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged
DATE OF RECEIPT 8/12/97

each other. However, a problem with conventional capstan motor assemblies is that, over time, the circular surfaces of the capstan drive roller, the idler and/or the capstan belt wheel may become worn, and particulate matter may lodge between the elements, thereby deforming the circular shape of the elements. Moreover, dirt may accumulate on the elements, thereby decreasing the frictional force between adjacent contacting surfaces. All of these occurrences tend to cause slippage between the drive roller and idler, and between the idler and the capstan belt wheel. Slippage inhibits drive performance for several reasons. Significantly, it is very important to both monitor and control the speed with which the data tape advances past the recording area. When slippage occurs, there is no way to accurately control and maintain the speed of the advancing tape. Moreover, particularly during a recording cycle, the rotational speed of the capstan motor is often used to monitor the translational speed of the data tape. However, when slippage occurs, the motor speed will not accurately reflect the speed of the data tape. A loss of the ability to control and/or monitor the tape speed may result in read/write errors or even drive failure in extreme cases.

SUMMARY OF INVENTION

According to a first aspect of the invention, there is provided a tape drive, comprising:

a housing including a slot in one surface for receiving a tape cartridge therein; transducing means for transferring data to and from a data tape within said tape cartridge;

a capstan motor assembly for driving a tape advance mechanism within said tape cartridge, said capstan motor assembly including:

This is the replacement sheet

Date: 08 DEC 1997

This Sheet Has Been Replaced


a motor mounted within said housing for supplying power,

a gear assembly mounted adjacent to said motor, said motor rotating said gear assembly, and

roller means adjacent to said gear assembly for engaging said tape advance mechanism, said gear assembly rotating said roller means; and

control means for providing control signals to said capstan motor assembly and for providing control signals to, and for transferring data to and from, said transducing means.

According to a second aspect of the invention, there is provided a capstan motor assembly of a tape drive for driving a tape advance mechanism within a tape cartridge, said assembly comprising:

a motor mounted within the tape drive for supplying power;

a gear assembly mounted adjacent to said motor, said motor rotating said gear assembly; and

roller means adjacent to said gear assembly for engaging the tape advance mechanism, said gear assembly rotating said roller means.

According to a third aspect of the invention, there is provided a capstan motor assembly for driving a tape advance mechanism within a tape cartridge, comprising:

a motor for supplying power to advance the tape;

a first gear affixed to said motor and having a common axis of rotation with said motor;

a second gear in meshing engagement with said first gear, said first gear driving said second gear;

This is the replacement sheet

Date **08 DEC 1997**

an idler for rotating the tape advance mechanism, said second gear fixedly mounted on said idler and having a common axis of rotation with said idler.

According to a fourth aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism of a tape cartridge upon insertion of the cartridge into a tape drive, said assembly comprising:

a plate mounted on a base of the tape drive for translational movement parallel to a direction of insertion of the cartridge into the tape drive;

biasing means for biasing said plate in a direction opposite to the direction of insertion of the cartridge; a motor

mounted on said plate for supplying power to advance the tape;

a first gear mounted on said motor;

a second gear in meshing engagement with said first gear, said first gear driving said second gear; an unbiased pivot arm mounted to freely pivot on said base;

an idler rotatably mounted on said unbiased pivot arm, said second gear fixedly mounted on and rotating said idler, said idler provided for contacting the tape advance mechanism so that rotation of said idler moves the tape advance mechanism.

According to a fifth aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

a motor for supplying power to advance the tape;

This is the replacement sheet

Date: 08 DEC 1997

a first gear adjacent to said motor;
a second gear coplanar with and spaced from said first gear;

belt means having a first end looped around said first gear and a second end looped around said second gear, said first gear rotating said belt means, said belt means rotating said second gear; an idler for engaging the tape advance mechanism to move the tape, said second gear fixedly mounted on and rotating said idler.

According to a sixth aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

a motor for supplying power to advance the tape;
a first gear adjacent to said motor;
rotating means mounted within the tape drive spaced from and coplanar with said first gear;
belt means having a first end looped around said first gear and a second end looped around said rotating means, said first gear rotating said belt means, said belt means provided to rotatably engage the tape advance mechanism at said second end to move the tape.

According to a seventh aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism of a tape cartridge upon insertion of the cartridge into a tape drive, said assembly comprising:

a plate mounted on a base of the tape drive for translational movement parallel to a direction of insertion of the cartridge into the tape drive;

This is the replacement sheet

Date: 08 DEC 1997

biasing means for biasing said plate in a direction opposite to the direction of insertion of the cartridge;

a motor fixedly mounted on said plate for supplying power to advance the tape;

a first gear affixed to said motor and having a common axis of rotation with said motor;

a second gear in meshing engagement with said first gear, said first gear driving said second gear;

an idler fixedly mounted on said plate for contacting the tape advance mechanism, said second gear fixedly mounted on said idler and having a common axis of rotation with said idler.

According to an eighth aspect of the invention, there is provided a tape drive, comprising:

a housing including a slot in one surface for receiving a tape cartridge therein;

transducing means for transferring data to and from a data tape within said tape cartridge; and

a capstan motor assembly for driving a tape advance mechanism within said tape cartridge, said capstan motor assembly including:

a plate translationally mounted to said housing,

a motor mounted on said plate for supplying power,

a first gear sharing a common axis of rotation with, and driven by, said motor,

a second gear rotationally mounted on said plate,

a belt having an inner surface and an outer surface, said inner surface including a plurality of teeth, said belt being

looped around said first and second with said teeth of said inner surface meshing with said first and second gears, said first gear being capable of rotating said belt, said outer surface of said belt capable of physically engaging and driving the tape advance mechanism to move the tape, and

biasing means affixed to said plate for biasing said belt into engagement with said tape advance mechanism.

According to a ninth aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

- a motor for supplying power to advance the tape;
- a first gear mounted on and driven by said motor;
- a second gear spaced from and coplanar with said first gear;

- a belt looped around said first and second gears, said belt including an inner surface having a plurality of teeth for meshing with said first and second gears, said first gear being capable of rotating said belt, said belt capable of physically engaging and driving the tape advance mechanism to move the tape.

The gear may be fixedly mounted to and coaxial with said motor.

The capstan motor assembly may further comprising a plate biased in a direction of the tape advance mechanism, said motor, said gear, and said rotating means being mounted on said plate, said plate capable of biasing said belt against the tape advance mechanism.

This is the replacement sheet

Date: 08 DEC 1997

According to a tenth aspect of the invention, there is provided a capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

- a motor for supplying power to advance the tape;
- a first gear mounted on and driven by said motor;
- a second gear spaced from and coplanar with said first gear;

- roller means coaxially mounted on said second gear and rotating with said second gear;

- a belt looped around said first and second gears, said belt including an inner surface having a plurality of teeth for meshing with said first and second gears, said first gear being capable of rotating said belt, said belt capable of rotating said second gear, and said roller means physically engaging and driving the tape advance mechanism to move the tape.

BRIEF DESCRIPTION OF DRAWINGS

In order that the invention might be more fully understood, embodiments of the invention will be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a top view of a known capstan motor assembly;

Figure 2A is a top view of a tape drive according to an embodiment of the present invention;

Figure 2B is a top view of an alternative embodiment of the present invention;

FIGURE 3 is perspective view of the capstan motor assembly according to an embodiment of the present invention;

This is the replacement sheet

Date: 08 DEC 1997

FIGURE 4 is a top view of the capstan motor assembly according to an embodiment of the present invention;

FIGURE 5 is a side view of the capstan motor assembly according to an embodiment of the present invention;

FIGURE 6A is a top view of an alternative embodiment of the present invention;


FIGURE 6B is a side view of the alternative embodiment shown in Fig. 6A;

FIGURE 7A is a top view of a further embodiment of the present invention;

FIGURE 7B is a side view of the alternative embodiment shown in Fig. 7A;

FIGURE 7C is an enlarged side view of a portion of the drive belt of the embodiment shown in Figs. 7A and 7B; and

FIGURE 8 is a top view of a further embodiment of the present invention.



23. A tape drive, comprising:

- a housing including a slot in one surface for receiving a tape cartridge therein;

- transducing means for transferring data to and from a data tape within said tape cartridge; and

- a capstan motor assembly for driving a tape advance mechanism within said tape cartridge, said capstan motor assembly including:

 - a plate translationally mounted to said housing,

 - a motor mounted on said plate for supplying power,

 - a first gear sharing a common axis of rotation with, and driven by, said motor,

 - a second gear rotationally mounted on said plate,

 - a belt having an inner surface and an outer surface, said inner surface including a plurality of teeth, said belt being looped around said first and second with said teeth of said inner surface meshing with said first and second gears, said first gear being capable of rotating said belt, said outer surface of said belt capable of physically engaging and driving the tape advance mechanism to move the tape, and

 - biasing means affixed to said plate for biasing said belt into engagement with said tape advance mechanism.

24. A capstan motor assembly for engaging a tape advance mechanism within a tape cartridge to move a data tape, comprising:

- a motor for supplying power to advance the tape;

- a first gear mounted on and driven by said motor;

- a second gear spaced from and coplanar with said first gear;

This is the replacement sheet

Date: 08 DEC 1997



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 15/26, 15/675	A1	(11) International Publication Number: WO 95/34068 (43) International Publication Date: 14 December 1995 (14.12.95)
(21) International Application Number: PCT/US95/07417 (22) International Filing Date: 9 June 1995 (09.06.95) (30) Priority Data: 08/257,737 9 June 1994 (09.06.94) US (71) Applicant: CONNER PERIPHERALS, INC. [US/US]; 3081 Zanker Road, San Jose, CA 95134-2128 (US). (72) Inventors: SPEARS, Jesse; 15 Sea Island Drive, Newport Beach, CA 92660 (US). NAYAK, Ashok; 250 Morgan Ranch Road, Glendora, CA 92660 (US). BOLT, Michael; Apartment A201, 2650 Harla Avenue, Costa Mesa, CA 92626 (US). (74) Agents: FLIESLER, Martin, C. et al.; Fliesler, Dubb, Meyer and Lovejoy, Suite 400, Four Embarcadero Center, San Francisco, CA 94111-4156 (US).	(81) Designated States: CA, CN, JP, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> 9612057-1	

(54) Title: **MECHANISM FOR MOVING A TAPE WITHIN A TAPE DRIVE**

(57) Abstract

A tape drive having a novel capstan motor assembly for advancing and rewinding a data tape. The capstan motor assembly according to the present invention includes a motor, a gear assembly and an idler. The gear assembly has a driver gear and a driven gear for transmitting motor torque from the motor to the idler. A portion of the idler is in contact with a capstan belt wheel within the cartridge. The idler rotates the capstan belt wheel, which in turn moves the data tape past the recording area. The gear train allows the motor force to be transmitted to the capstan belt wheel without slippage between the drive roller and the idler normally occurring in conventional capstan motor assemblies.

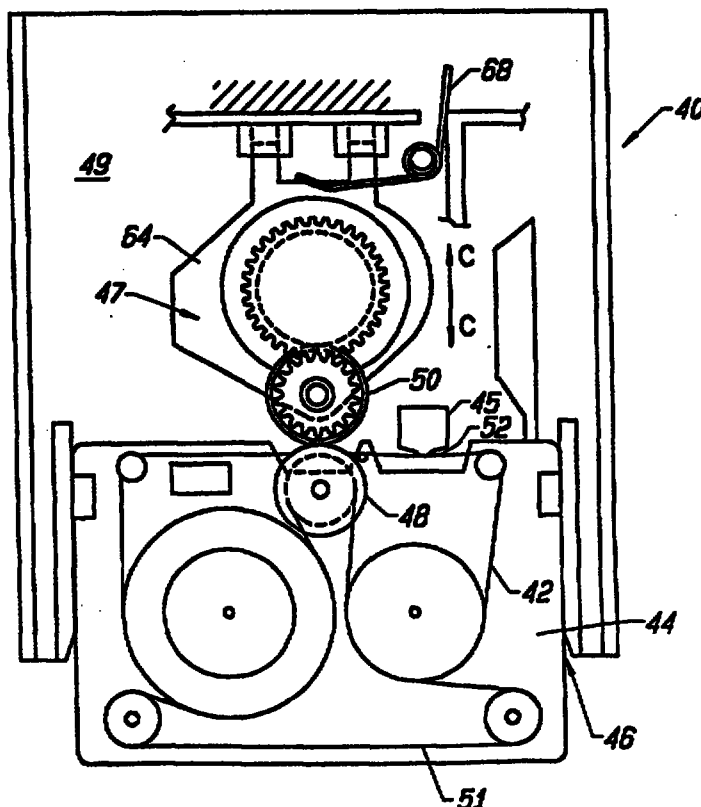

23 DEC 1999

-3a-

monitor the tape speed may result in read/write errors or even drive failure in extreme cases.

SUMMARY OF INVENTION

According to a first aspect of the invention, there is provided a tape drive, comprising:

a housing including a slot in one surface for receiving a tape cartridge therein; transducing means for transferring data to and from a data tape within said tape cartridge;

a capstan motor assembly for driving a tape advance mechanism within said tape cartridge, said capstan motor assembly including: