




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A21B 5/02	A1	(11) International Publication Number: WO 97/48282 (43) International Publication Date: 24 December 1997 (24.12.97)
(21) International Application Number: PCT/EP97/03050 (22) International Filing Date: 12 June 1997 (12.06.97) (30) Priority Data: 1506/96 17 June 1996 (17.06.96) CH (71) Applicant (for all designated States except DE IT US): SOREMARTEC S.A. [BE/BE]; Drève de l'Arc-en-Ciel 102, B-6700 Schoppach-Arlon (BE). (71) Applicant (for IT only): FERRERO S.P.A. [IT/IT]; Piazzale Pietro Ferrero, 1, I-12051 Alba (IT). (71) Applicant (for DE only): FERRERO OFFENE HANDELSGESELLSCHAFT MBH [DE/DE]; Hainer Weg 120, D-60599 Frankfurt am Main (DE). (72) Inventor; and (75) Inventor/Applicant (for US only): ROSSO, Renato [IT/IT]; Strada Rorine, 40, I-12051 Alba (IT). (74) Agents: BOSOTTI, Luciano et al.; Jacobacci & Perani S.p.A., Corso Regio Parco, 27, I-10152 Torino (IT).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(54) Title: A METHOD FOR MANUFACTURING SHAPED WAFERS, AN INTERMEDIATE PRODUCT AND A WAFER OBTAINED BY THIS METHOD, AND AN ASSOCIATED MOULD		

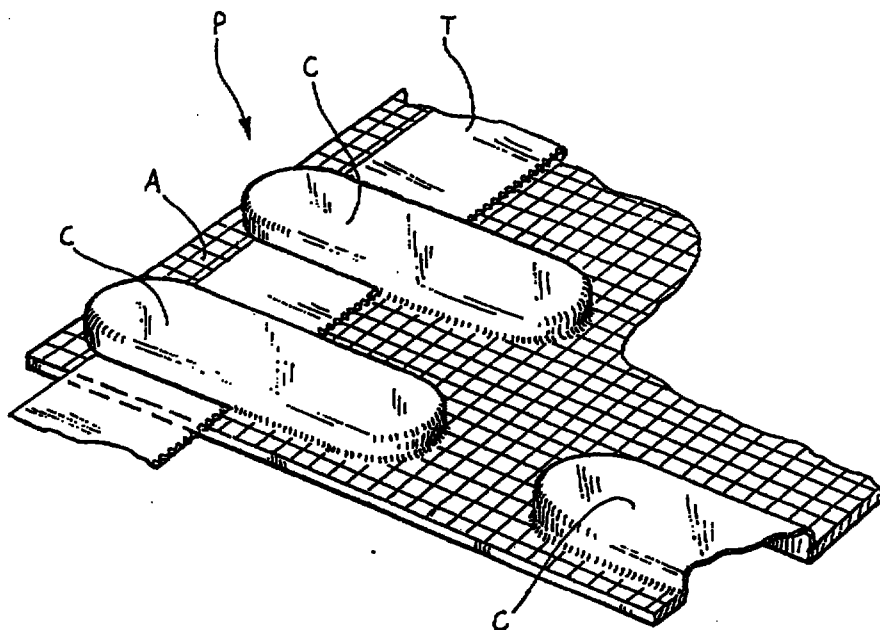

(57) Abstract

Wafers that are shaped, for example, as a basin (C), are obtained from an intermediate product (P) in which the aforesaid shaped parts are joined together by a substantially flat base part (A). The shaped parts (C) have a thickness of the order of, for example, 1-1.5 mm compared with the significantly greater thickness, of the order of 2.2-2.5 mm, of the base part (A). In this way it is possible to extract the intermediate product (P) from the cooking mould safely and without the risk of breakage, even when the shaped parts (C) have much thinner walls.