


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01J 37/32, H05H 1/46		A3	(11) International Publication Number: WO 99/14784
			(43) International Publication Date: 25 March 1999 (25.03.99)
(21) International Application Number: PCT/US98/19122		(81) Designated States: IL, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 16 September 1998 (16.09.98)			
(30) Priority Data: 08/931,504 16 September 1997 (16.09.97) US		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: LAM RESEARCH CORPORATION [US/US]; 4650 Cushing Parkway, Fremont, CA 94538-6470 (US).		(88) Date of publication of the international search report: 3 June 1999 (03.06.99)	
(72) Inventors: HOLLAND, John, Patrick; 617 Enright Avenue, Santa Clara, CA 95050 (US). DEMOS, Alex; Apartment #2-1204, 2 Townsend Street, San Francisco, CA 94107 (US).			
(74) Agent: LOWE, Allan, M.; Lowe Hauptman Gopstein Gilman & Berner, LLP, Suite 200, 2034 Eisenhower Avenue, Alexandria, VA 22314 (US).			

(54) Title: VACUUM PLASMA PROCESSOR HAVING COIL WITH ADDED CONDUCTING SEGMENTS TO ITS PERIPHERAL PART

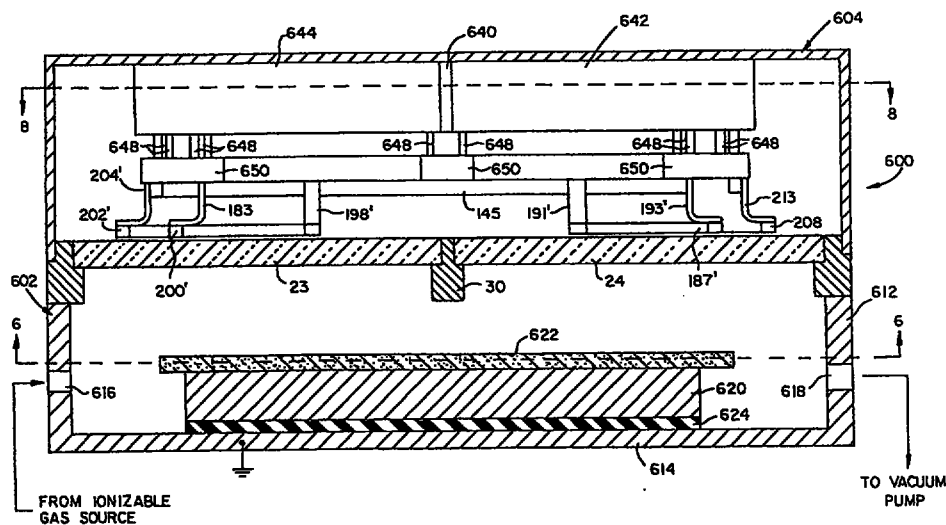

(57) Abstract

An anti-tamper locking assembly for locking a position of a block (202), such as a locking bolt in an electronic lock, electrically moves a pin (4060) to engage or dis-engage the block (202). When dis-engaged, the block (202) can be moved and access or the like can be made. The pin (4060) is selectively moved electronically in order to allow access, entry or the like. The pin (4060) can be moved with, e.g., a solenoid (209). The pin (4060) has an overhanging portion, or a head portion (4060A). In order to prevent an individual from forcing the pin (4060) into an un-locked position, the head portion (4060A) operates in conjunction with at least one spring-arm member (4010, 4020) and a blocker (4040) which are fixed to the block (202) to prevent a user from being able to strike the device with a hammer or the like to "temporarily" move the pin (4060) to a position allowing the block (202) to be moved and access or the like to be made.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						