



(51) International Patent Classification:

E21B 7/06 (2006.01) *E21B 19/24* (2006.01)
E21B 15/04 (2006.01)

(21) International Application Number:

PCT/US2013/052068

(22) International Filing Date:

25 July 2013 (25.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventor: **LAJESIC, Borisa**; 15777 Quorum Dr. #1233, Addison, TX 75001 (US).

(74) Agents: **JORDAN, Carey, C.** et al.; McDermott Will & Emery LLP, 500 North Capitol Street, N.w., Washington, DC 20001 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: DEFLECTOR ASSEMBLY FOR A LATERAL WELLBORE

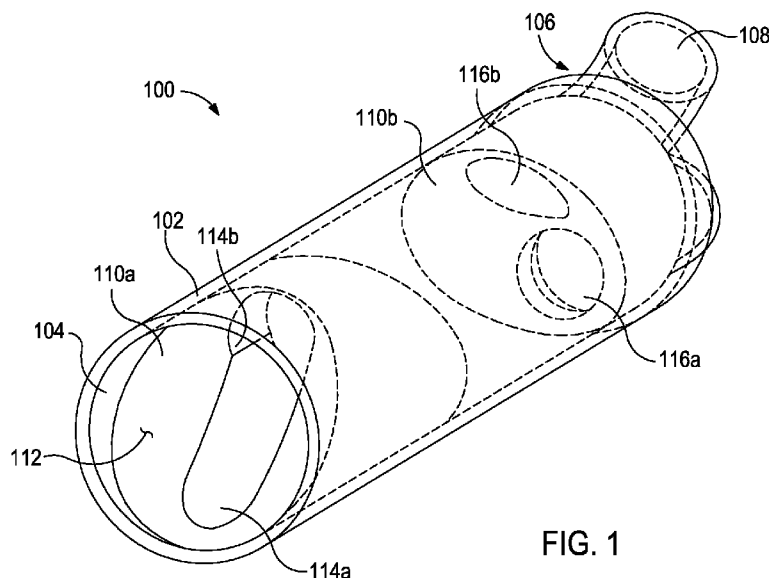


FIG. 1

(57) Abstract: Disclosed is a multi-deflector or assembly for guiding a bullnose assembly into a selected borehole within a wellbore. One deflector assembly includes an upper deflector arranged within a main bore of a wellbore and defining first and second channels that extend longitudinally through the upper deflector, wherein the second channel exhibits a width greater than that of the first channel, and a lower deflector arranged within the main bore and spaced from the upper deflector by a predetermined distance, the lower deflector defining a first conduit that communicates with a lower portion of the main bore and a second conduit that communicates with a lateral bore, wherein the upper and lower deflectors are configured to direct a bullnose assembly into one of the lateral bore and the lower portion of the main bore based on a length of a bullnose tip of the bullnose assembly as compared to the predetermined distance.