



- (51) International Patent Classification: Not classified
- (21) International Application Number: PCT/US2012/029696
- (22) International Filing Date: 19 March 2012 (19.03.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
- | | | |
|------------|--------------------------------|----|
| 61/453,871 | 17 March 2011 (17.03.2011) | US |
| 61/502,279 | 28 June 2011 (28.06.2011) | US |
| 61/535,116 | 15 September 2011 (15.09.2011) | US |
| 61/585,229 | 10 January 2012 (10.01.2012) | US |
- (71) Applicant (for all designated States except US): **LIQUID ROBOTICS, INC.** [US/US]; 1329 Moffett Park Drive, Sunnyvale, California 94089 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HINE, Roger G.** [US/US]; 600 Ringwood Avenue, Menlo Park, California

94025 (US). **HINE, Derek L.** [US/US]; 50 Hawkview Street, Portola Valley, California 94028 (US).

- (74) Agents: **SLONE, David** et al.; Kilpatrick Townsend & Stockton LLP, Two Embarcadero Center, 8th Floor, San Francisco, California 94111-3834 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: WAVE-POWERED DEVICES CONFIGURED FOR NESTING

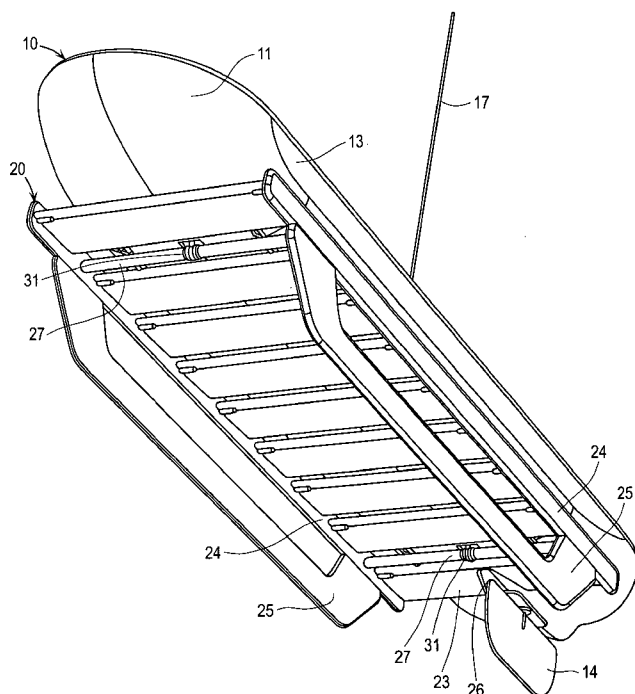


FIG. 3B

(57) Abstract: A wave-powered water vehicle includes a) a first component which is a float that travels on or near the water surface; b) a second component which is wave actuated and travels below the first component; and c) a means whereby the first component engages the second component and/or the second component engages the first component; wherein the engagement means provides lateral support of one component for the other, and thereby minimizes lateral movement of one against the other when the components are fitted together.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*