




- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:**
PCT/EP2011/065512
- (22) **International Filing Date:**
8 September 2011 (08.09.2011)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
20101260 9 September 2010 (09.09.2010) NO
- (71) **Applicant (for all designated States except US):** AKER MH AS [NO/NO]; P. O. Box 413, Lundsiden, N-4604 Kristiansand (NO).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** ANDRESEN, Kurt [NO/NO]; Ingrid's vei 14, N-4633 Kristiansand (NO). BENDIKSEN, Rolf [NO/NO]; Urds gt. 30B, N-3182 Horten (NO). PÖHNER, Lars [NO/NO]; Trostestien 22, N-3189 Horten (NO).
- (74) **Agents:** LANGAN, Hans et al.; Onsagers AS, P. O. Box 6963, St. Olavs plass, N-0130 Oslo (NO).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) **Title:** A SEAFASTENING APPARATUS FOR A TENSIONER ASSEMBLY

Fig. 12

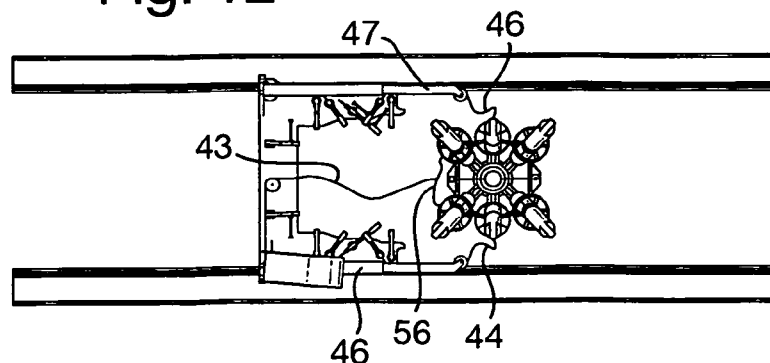

(57) **Abstract:** A seafastening apparatus (20; 40) comprises a movable frame (23; 49) having an opening (A) configured for receiving and at least partially supporting an equipment unit (70). Locking means (25a,b; 43, 44, 45, 48) are configured for selective locking an releasing of the equipment unit and hence controlling lateral movements of the equipment unit relative to the apparatus. The locking means comprise wires (43, 44, 45) configured for connection to the equipment unit and tensioners (53, 54, 55) configured for controlling the tension in each wire, and a pair of extendible and retractable arms (46, 47) are configured for conveying and guiding at least on of the wires.