

(51) International Patent Classification:
H04R 25/00 (2006.01) *A61F 11/00* (2006.01)(21) International Application Number:
PCT/DK2010/050085(22) International Filing Date:
16 April 2010 (16.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **WIDEX**
A/S [DK/DK]; Nymoellevvej 6, DK-3540 Lyngby (DK).

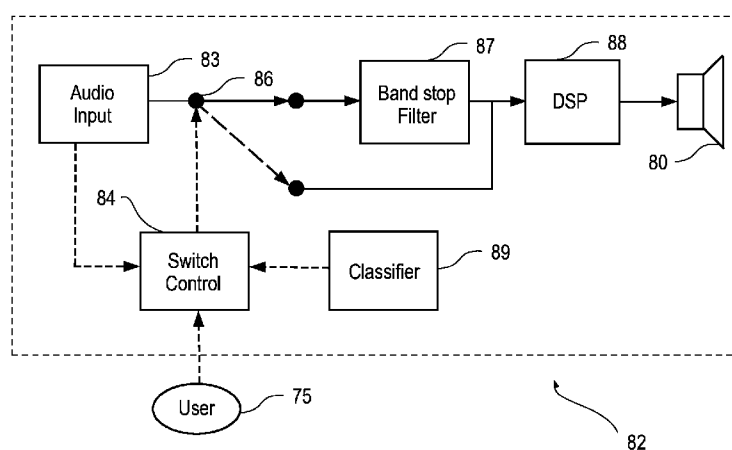
(72) Inventors; and

(75) Inventors/Applicants (for US only): **NIELSEN, Jakob**
[DK/DK]; Classensgade 60, 4th Floor, left, DK-2100
Copenhagen Ø (DK). **STIEFENHOFER, Georg**
[DE/DK]; Nymoellevvej 6, DK-3540 Lyngby (DK). **RANK,**
Mike Lind [DK/DK]; Roermose Parkvej 25, DK-3520
Farum (DK). **ANDERSEN, Stine Kohrtz** [DK/DK];
Godthaabsvej 213, 1st floor, right, DK-2720 Vanløse
(DK).(74) Agents: **RØRDAM, Troels Peter** et al.; Awapatent A/S,
Rigsgade 11, DK-1316 København K (DK).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A HEARING AID AND A METHOD FOR ALLEVIATING TINNITUS

**Fig. 8**

(57) Abstract: A hearing aid (62, 72, 82, 92, 102, 112) adapted for alleviating tinnitus of a user (75), said hearing aid comprising an audio input means (83), a signal processing unit (88, 98, 108, 118) and an output transducer (80) wherein the hearing aid further comprises a band stop filter (87) arranged to match a tinnitus of the user and in that the hearing aid (62, 72, 82, 92, 102, 112) further comprises switching means (86, 116) and switch control means (84, 114) for controlling the switching of said band stop filter (87), into and out of the signal path between the audio input means (83) and the output transducer (80), in response to a pre-defined trigger event. The invention further provides a method of adjusting a hearing aid.