

SAFETY APPARATUS

This invention relates to safety apparatus which includes a component having at least a first state and an emergency state. Examples are fire safety apparatus such as ventilators for venting smoke from a burning building and smoke curtains for restricting the spread of smoke in a burning building.

A ventilator is generally movable between a closed position (first state), through various partially open positions (intermediate states) and a fully open position (emergency state) which last position is the one adopted to provide maximum venting of smoke. Such ventilators can also be used to provide normal day-to-day ventilation, the degree of opening or number of the ventilator(s) being determined by the amount of ventilation required at any given time.

A smoke curtain has two operative states, a raised state (first state) in which the curtain is retained within a ceiling cavity of a room, for example, and a dropped or lowered state (emergency state) in which the curtain has been lowered to the floor to divide a room into different zones to contain smoke to one side of the curtain. Such smoke curtains can be raised and lowered in the absence of an emergency, for example to carry out routine testing of

the equipment.

A common feature of the ventilator and smoke curtain described above is that they are generally arranged to be movable to their respective emergency state when there is
5 no emergency in force, for example, for day-to-day ventilation or testing. The components are generally movable between their various states by operating means under the control of a control means.

In safety critical applications in which the component
10 must be movable to the emergency state during an emergency, it is desirable that the apparatus fails safely by moving to the emergency state if the apparatus breaks down so it will be in the appropriate state should an emergency arise before it is repaired. In the context of ventilators, for
15 example, it is very common to maintain the vent in its closed position by means of pneumatic pressure acting against a local, spring-driven actuator or spring so that on failure of the pneumatic supply, the spring driven actuator or spring moves the vent to the open (emergency)
20 state.

Day-to-day ventilation can be provided by altering the pneumatic pressure to open and close the ventilator as required. If an emergency is detected, the pneumatic pressure is released by the controller so the ventilator
25 moves to its open position if it was not already open.

Electrical operating means have also been employed in which the spring force of an actuator is resisted by a solenoid clutch and an electric motor. If the electrical supply to the motor fails, the ventilator is again opened
5 by the spring driven actuator or spring.

Similarly, smoke curtains can be controlled such that they can be raised and maintained in the raised position by the action of an electric motor but should the source of electrical power needed to drive the motor fail, the smoke
10 curtain drops under the force of gravity acting on weights attached to the bottom of the curtain, for example, to the lowered, emergency position.

A disadvantage of pneumatically controlled systems is the considerable cost associated with the pipework and
15 compressors. Further disadvantages are that there is little flexibility in their control and there is no assurance that the operating means will act to move the component to the emergency state once the force keeping it in the first state is removed. For example, the spring in
20 the above described ventilator may break or the frictional forces associated with poorly maintained bearings of the smoke curtain may prevent it dropping under gravity.

Electrically operated actuators in such apparatus would require a well protected source of electricity and,
25 in the case of electric motor operated components, would

often need to be supplied with a high electrical current so the component could be moved between states quickly. The wiring through the building would therefore require a high current carrying capability.

5 The present invention seeks to provide an improved safety apparatus and accordingly provides a safety apparatus including a component having at least a first state and an emergency state and movable between the states by one or more actuators under the control of a controller
10 in which the actuators are powered solely by an energy storage means arranged to be recharged at a rate which is smaller than the rate of discharge when powering the actuators and including energy level monitoring means arranged to monitor the energy stored in the energy storage
15 means to determine if the energy stored in the energy storage means has fallen below a predetermined threshold at which there is sufficient energy in the energy storage means to provide at least a predetermined number of movements of the component between the first state and the
20 emergency state.

 The apparatus, preferably, includes an indication means coupled to the monitoring means arranged to provide a visual indication if the energy stored in the energy storage means has fallen below the predetermined threshold.
25 This could be a slowly flashing light or the switching off

of an otherwise continuously or intermittently lit light, for example. In some circumstances a non-visual indication may be convenient, for example an audible alarm, instead of or as well as the visual indication.

5 The present invention provides the ability to drive, with safety, relatively high powered, remote actuators used to move the component between states with a low power supply to the energy storage means of the apparatus because the monitoring means determines when non-emergency use
10 should cease in order to ensure there is enough energy in the energy storage device to move the component to the emergency state should an emergency arise. The first threshold is set at a level at which there is sufficient energy in the energy storage means to provide at least a
15 predetermined number of movements, for example four, between the first state and the emergency state.

 The controller may be further arranged to move the component to the emergency state if the energy level falls below a second threshold, for example a threshold which
20 corresponds to two movements between the first state and emergency state. The provision of a warning at the first threshold level before an automatic movement to an emergency state when the available energy in the energy storage means falls below the second threshold can allow
25 time for remedial action to be taken before the component

adopts its safe but perhaps inconvenient emergency state.

Preferably the controller has a first control mode in which the controller is able to respond to emergency commands, only, to move the component between the first
5 state and the emergency state and a second control mode in which the controller is able to respond to non-emergency commands to move the component between the first state and the emergency state, the controller being arranged to switch to the first control mode if the energy stored in
10 the energy storage means has fallen below the first threshold level.

This configuration ensures the component cannot be moved between states except via emergency commands, either automatically generated in response to the detection of
15 fire, smoke or other emergency or manually input by firemen, for example, if the energy level of the energy storage means falls below the first threshold. It will be appreciated that emergency commands can be used to move the component to any of its states, not just the emergency
20 state: it may be necessary to close a smoke vent to prevent wind blowing into a burning building even though the emergency state of the vent would be the open position to allow smoke to vent from the building, for example.

The apparatus may be arranged so that the controller
25 also moves to the first control mode on receipt of an

emergency alarm signal. This is the preferred arrangement of the invention.

Non-emergency ("day-to-day") operation is possible when the controller is in its second control mode. For
5 example, a ventilator could be moved between the open and closed position as desired, either manually or automatically in response to detected environmental conditions.

The controller may be arranged to move the component
10 to a selected state on moving to its first control mode. For example, the ventilator may be moved to the closed position for security reasons, perhaps, where it will remain until an emergency is detected, an emergency "open" command is issued or the controller is moved out of this
15 first control mode. It may be preferable in some circumstances for the controller to move the component to its emergency state on moving to the first control mode so that it immediately adopts a fail-safe condition.

The apparatus may be arranged so that the selected
20 state is alterable by, for example, a switch or a movable jumper lead on a printed circuit board of the controller.

Although the preferred embodiment of the invention provides that the controller is not able to move the component to the emergency state except in response to an
25 emergency command when in its first control mode, the

apparatus may be configured to allow movement of the component to others of its states. For example, the controller may be arranged to allow closure, only, of a ventilator, when in the first control mode so if the
5 controller is moved to its first control mode when the ventilator is already open, ie in the emergency state, it can remain there for a time and the ventilator subsequently closed in stages perhaps, as the requirements of day-to-day ventilation dictate. However, once closed, the controller
10 if it remains in the first control mode will move the ventilator back to or towards the emergency, open, state only in response to an emergency command.

The controller may be arranged so that whichever control mode it is in, it will automatically move the
15 component to its emergency state on detection of an emergency. In the case of a ventilator or smoke curtain, the detection of smoke or heat, for example, might cause the controller to open the vent or lower the smoke curtain.

The apparatus may be provided with sensors near the
20 location of the component so locally derived emergency signals can be obtained and the controller arranged to go into its first control mode and to move the component to its emergency state on local detection of an emergency so the component operates appropriately even if remote parts
25 of the emergency control system fail due to the emergency

itself.

The energy storage device can be selected from a range of devices. It can be a battery trickle charged by a wire connectable to mains power supply of a building or a solar
5 cell with relatively large current capacity wires being needed only between the batteries and the actuators. The battery could be trickle charged by way of a direct current trickle charge current carried on a twisted wire pair, which twisted wire pair also carries command signals to the
10 associated controller from a central controller.

An alternative device is a spring mechanism, for example a clockspring driven at one end by a small electric motor. The other end of the clockspring would be arranged to open and close the ventilator, for example, via a crank.
15 Several operational cycles of the component should be available when the spring has the maximum energy stored. The controller monitors the number of rotations of the electric drive and the component movement to determine the number of operational cycles that can still be obtained
20 from the energy in the spring mechanism at any given time.

Preferably a solenoid-driven brake or latch is provided (possibly a bistable arrangement which would not require continuous power to be applied to the solenoid), to stop the spring from unwinding at the appropriate open and
25 closed positions. A 'trickle-charging' low-current wire

would drive the electric motor.

Other, alternative, energy storage devices are fluid accumulators, for example a pneumatic accumulator or a hydraulic accumulator, both of which can be 'trickle
5 charged' using small bore pipes.

The energy storage devices are ideally positioned close to each component's actuators.

An apparatus according to the present invention can have two or more components, for example adjacent
10 ventilators, controlled by a single controller.

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings of which:

Figure 1 is a schematic diagram of a smoke ventilation
15 and control system incorporating a ventilator and a smoke curtain, each according to the present invention; and

Figure 2 is a schematic diagram of the controllers of the system of Figure 1.

Referring to Figure 1, a smoke ventilation and control
20 system includes seven ventilator apparatus 4 to 14 and a smoke curtain apparatus 16, each including a controller 18, six fire/smoke detectors 20 and a central controller 22. The central controller 22 communicates with the controllers 18 via a communications bus 24. Each controller 18 is
25 linked to a mains power cable 26 via a respective low

current capacity spur wires 28.

The ventilators 4 to 14 are located in a building at positions from where smoke is to be vented in the event of a fire. The smoke curtain apparatus 16 has a housing 30 which is fixed to the ceiling or within a ceiling cavity (not shown) at a position where the passage of smoke, across a large room for example, is to be constrained.

The fire/smoke sensors 20 are positioned throughout the building in appropriate places to provide early detection of fire or smoke. The sensor outputs are collated by a known fire alarm panel 22a connected to the controller 22.

The ventilators 4 to 14 are Kameleon Mk III Ventilators manufactured by Colt International Limited, Havant, Hampshire PO9 2LY, England, each of which has a hinged glass vent 34 movable between a closed position to the illustrated open position by means of electric motors 37 (see Figure 2) powered by batteries 35. They can also be moved to intermediate positions between these two extremes. The open position is the emergency state of this component as it is the state adopted in the event of a fire to allow smoke to vent from the building.

A smoke curtain 36 of the smoke curtain apparatus 16 is movable into and out of the housing 30 by means of an electric motor driving a roller (not shown) within the

housing 30. The lowered position of the curtain 36 is the emergency state of the smoke curtain apparatus 16.

The operation of each of the ventilators 4 to 14 and the smoke curtain 16 is controlled by the associated controller 18, as indicated schematically by the arrows 38, each connected to the central controller 22. As will be explained in more detail below, the controllers 18 and central controller 22 provide a distributed control system in which each controller 18 has sufficient control and communications electronics to be controlled from the main control panel or to act independently if the need arises.

The controllers 18 each have at least two control modes; a first control mode in which the controller 18 is able to respond to emergency commands, only, to move its associated component (ventilator 4 to 14 or smoke curtain 16 in this particular example) and a second control state in which the controller 18 is able to move the component between the first state and the emergency state in response to non-emergency commands. The controllers 18 therefore allow operation of the ventilators to meet day-to-day ventilation requirements or of the smoke curtain 36 for testing until the controller 18 is moved into the first control mode when emergency command operation, only, is possible.

The commands for day-to-day operation can be derived

from manual input at the central controller 22, automatic control routines in the central controller 22 or controllers 18 influenced by readings from sensors (including environmental sensors such as temperature sensors).

The central controller 22 uses conventional control techniques and the Apollo control signal protocol available from Apollo Fire Detectors Ltd, 6 Solent Road, Havant, Hampshire PO9 1JH. The communications bus 24 links the central controller 22 to the controller 18 in a known manner. The controllers 18 are based on a commercially available control chip set sold in the UK by Apollo.

Methods of designing hardware and software to provide a robust control system are well known and will not be explained in detail in this application.

Referring now to Figure 2, a controller 18 has an input/output module 50 which provides the interface between the controller 18 and the central controller 22 via spurs 51 of the communications bus 24.

The heart of each controller 18 is a generic microprocessor embedded controller 52. The only significant difference between the controllers 18 appropriate to different ventilators and smoke curtains is the power drives required for different types of motors - the controls and communication sub-systems remain

universal. This approach to design is preferred as it increases system flexibility and keeps manufacture to a minimum.

The main functions of the embedded controller 52 are:-

- 5 1. read command data from the central controller 22;
2. send status information back from a ventilator 12 or smoke curtain apparatus 16 over the communication subsystem;
3. monitor data from a local smoke sensor 54, a local or
10 nearby heat sensor 54 and a local rain sensor 56 mounted on the ventilator and/or in ventilator zones and act on the sensed information as required;
4. prioritise incoming information;
5. monitor the battery 35 and solar panel 29 (if fitted)
15 to maintain safe operation;
6. send the necessary signals to the vent motor drives 37 via power drive interfaces 53 for day-to-day or emergency operation;
7. monitor the status of the electric motors 37 and
20 associated drive electronics;
8. drive a visual diagnostics lamp which provides a visual indication of the operational status of the ventilator by flashing if the ventilator is fully operational and providing steady light if it is not; and
- 25 9. maintain control over a current conservation function.

The local heat sensor 56 and smoke sensor 54 provide a safety backup to the main fire alarm central control. The heat sensor 56 and rain sensor 58, strategically mounted within zones inside and outside the building are
5 used for general ground monitoring and automatic comfort ventilation control.

Data from all the sensors 54 to 58 can be fused in order to provide the local control system with "intelligent" information, for example a combination of low
10 temperature, moisture and lack of current from the solar cell could indicate the presence of snow. The necessary action can then be taken.

The battery is charged via a charge regulator 68 electrically connected to a mains supply 26 via one of the
15 spurs 28 and/or to a solar panel 29 via a spur 28' under the control of the generic controller 52.

The charge state of the battery is monitored as follows.

The only two variables used in this exemplary
20 embodiment for ascertaining the state of the battery during use are battery voltage and battery impedance.

An input to an A to D converter is used to monitor the battery voltage, samples being taken continually and grouped as to whether the battery is on charge, on load, or
25 idle. Approximate values of the battery impedance are

measured by periodically (approx every 10 seconds) connecting a resistor across the battery for 42ms. The voltages measured, just before the connection and subsequent disconnection of the resistor, are used to
5 estimate the battery impedance. Samples taken are used by the generic controller 52 to set error flags if the battery is faulty or in a state of low charge.

If either the low charge flag or battery faulty flag is set, this information is communicated to the Apollo
10 interface as an error code. Additionally, the state of these flags can be obtained by the controller 22 via the bus 24 by requesting a status report. Should the flags be set, a visual indication is given by flashing the visual diagnostics lamp 62 (a red lamp). The lamp 62 is used to
15 communicate any error condition, not just battery faults: the status report allows the user to determine precisely what has happened.

The following charger fault flags are also defined: low-input-charging-volts, transformer-fuse-blown, control-
20 wire-fuse-blown, current-has-tapered-back and mechanical failure flags. The current-has-tapered-back flag is set if the charging current has, in this example, falls below 0.4A. The battery-faulty flag and the transformer-fuse-blown flag will be set if these conditions occur, and can
25 only be cleared should the controller 18 be reset or a

reset command is received from the central controller 22. The other flags are transient, being set if the condition exists and cleared if the controller 18 affected determines that the conditions no longer exist. The control-wire-
5 fuse-blown flag has no use in this embodiment but is included to allow ready software development for other embodiments. In this embodiment this flag is always set to 0.

A software charge integration procedure is also
10 included. This procedure monitors digitised samples of charging current Q_{in} and motor current Q_{out} , and uses these values to keep track of the available energy remaining in the battery. Initialisation algorithms set the value in charge accumulator computer store, both at initial power
15 up, and during the running of the controller 18, to prevent the charge accumulator drifting out of bounds.

If the charge accumulator indicates that the remaining available energy in the battery is below a specified first threshold, the generic controller 18 is moved to its first
20 control mode to inhibit the opening of the ventilator except on receipt of emergency commands, the battery-discharged flag is set and the indicator lamp 62 is made to flash.

The battery-discharge flag is set when the algorithms
25 of the generic controller 52 indicate that the remaining

charge in the battery can only support a given number, for example four, of further opening operations. Whilst this flag is set, day-to-day ventilation operations are inhibited.

5 The system of Figure 1 operates as follows:

 The ventilators 4 to 14 and smoke curtain 16 are operated to meet day-to-day requirements either by manual input to the central controller 22 or automatically as determined by the central controller 22 or controllers 18.

10 For example, a ventilator controller 18 can be arranged to open its associated ventilator if either the wind speed or air moisture level or rain is greater than some preset level and there is no emergency. If, however, a battery fault is detected or its stored energy level drops below a

15 predetermined first threshold the associated controller 18 moves to its first control mode and controls the motor of the associated ventilator to move it to one of its operation states. In this embodiment a ventilator is moved to the closed position, and the smoke curtain 16 of the

20 smoke screen 36 is retracted into the housing 30.


 The affected controller 18 now will only move the ventilator or smoke curtain to its emergency state, that is fully open or fully lowered, respectively, in response to emergency commands or if an emergency is detected.

25 In this embodiment, the controller 18 will also

operate the component in this manner if fire or smoke is detected by one of the fire/heat sensors 20 or a local heat or smoke sensor 54 or 56 or if a fusible link blows.

5 The controller 18 will move out of the first control mode to the second or other control mode once the battery charge level is above the threshold level, any battery fault has cleared, and no emergency is detected.

10 If the battery discharges further to below a second threshold level when only two ventilator opening or smoke curtain dropping operations are possible, for example, the apparatus fails-safely by automatically moving the ventilator and smoke curtain to the open and lowered, emergency state, respectively.




CLAIMS

1. Safety apparatus including a component having at least a first state and an emergency state and movable between the states by one or more actuators under the control of a controller in which the actuators are powered solely by an energy storage means arranged to be recharged at a rate which is smaller than the rate of discharge when powering the actuators and including energy level monitoring means arranged to monitor the energy stored in the energy storage means to determine if the energy stored in the energy storage means has fallen below a predetermined threshold at which there is sufficient energy in the energy storage means to provide at least a predetermined number of movements of the component between the first state and the emergency state.

2. An apparatus as claimed in claim 1 including an indication means coupled to the monitoring means arranged to provide a visual indication if the energy stored in the energy storage means has fallen below the predetermined threshold.

3. An apparatus as claimed in either one of claims 1 and 2 in which the controller has a first control mode in which the controller is able to respond to emergency commands, only, to move the component from the first state to the emergency state and a second control mode in which



the controller is able to respond to non-emergency commands to move the component between the first state and the emergency state, the controller being arranged to switch to the first control mode when the energy stored in the energy storage means has fallen below the first threshold level.

4. An apparatus as claimed in claim 3 in which the controller is arranged to move the component to a selected one of the states of the component on moving to its first control mode.

10 5. An apparatus as claimed in claim 4 in which the selected one of the states of the component is alterable.

6. An apparatus as claimed in claim 4 in which the selected state is the emergency state of the component.

15 7. An apparatus is claimed in any preceding claim in which the component is a ventilator which is closed in the first state and open in the emergency state.

8 An apparatus as claimed in any preceding claim in which the energy storage device comprises a spring mechanism coupled to an electric motor.

20 9. An apparatus as claimed in any one of claims 1 to 7 in which the energy storage device is a battery.

10. An apparatus as claimed in claim 9 in which the battery is trickle charged.

25 11. An apparatus as claimed in claim 10 in which the battery is trickle charged by way of one or more wires



connectable to a mains power supply of a building.

12. An apparatus as claimed in claim 10 in which a battery is trickle charged by a solar cell.

13. An apparatus as claimed in claim 10 in which the
5 battery is trickle charged by way of a direct current trickle charge current carried on a twisted wire pair, which twisted wire pair also carries command signals to the associated controller from a central controller.

14. An apparatus as claimed in any one of claims 1 to
10 7 in which the energy storage device comprises a fluid accumulator.

15. An apparatus as claimed in any preceding claim and including local environmental sensors coupled to the controller which is arranged to be able to operate on the
15 basis of locally derived environmental information from the sensors if desired.

16. An apparatus as claimed in claim 15 in which the sensors include one or more of a heat sensor, smoke sensor and rain sensor.

20 17. An apparatus as claimed in any preceding claim in which there are two or more components controlled by a single controller.

18. An apparatus substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT (Ref Figure 1)

SAFETY APPARATUS

5 A ventilator (12) includes a vent (34) having at least a first, closed, state and an emergency, open, state and movable between them by actuators (57) under the control of a local controller (18). The actuators, for example electric motors, are powered solely by a local energy
10 storage means, for example a battery, arranged to be recharged at a rate which is smaller than the rate of discharge when powering the actuators. A monitoring means determines if the energy in the energy storage means has fallen below a first threshold and provides a visual
15 indication of this condition. The controller has a first control mode in which it is not able to move the ventilator (12) to the emergency state except in response to emergency commands, only, and a second control mode in which it is able to move the ventilator between the first state and the
20 emergency mode in response to non-emergency commands to provide day-to-day ventilation, for example. The controller is moved to its first control mode if the battery charge level drops below a second predetermined threshold thereby preventing day-to-day ventilation but
25 allowing opening of the ventilator in the event of a fire.



1/2

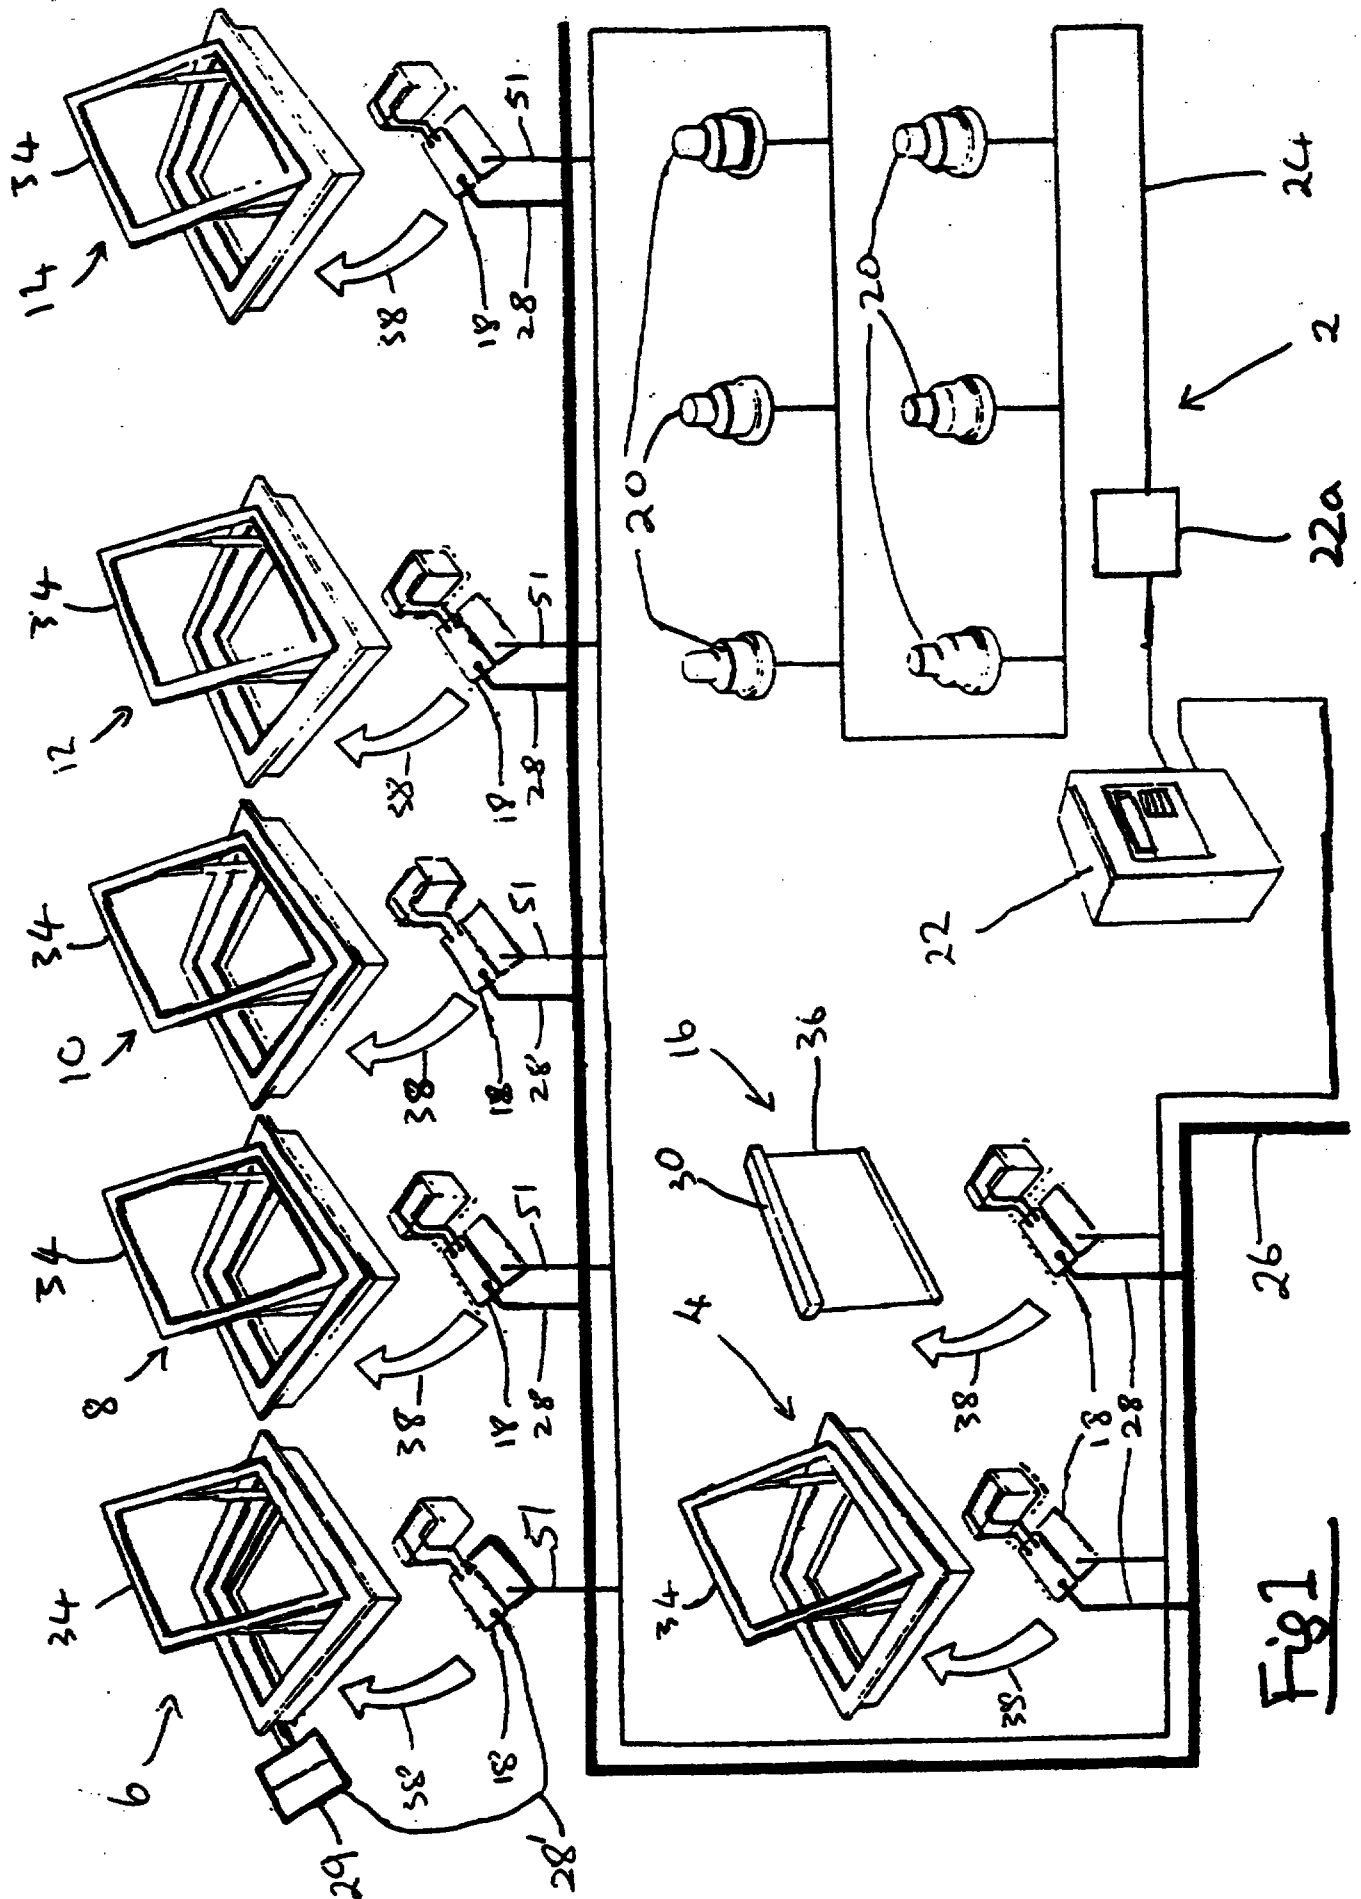


Fig 1

2/2

This Sheet Has Been Replaced

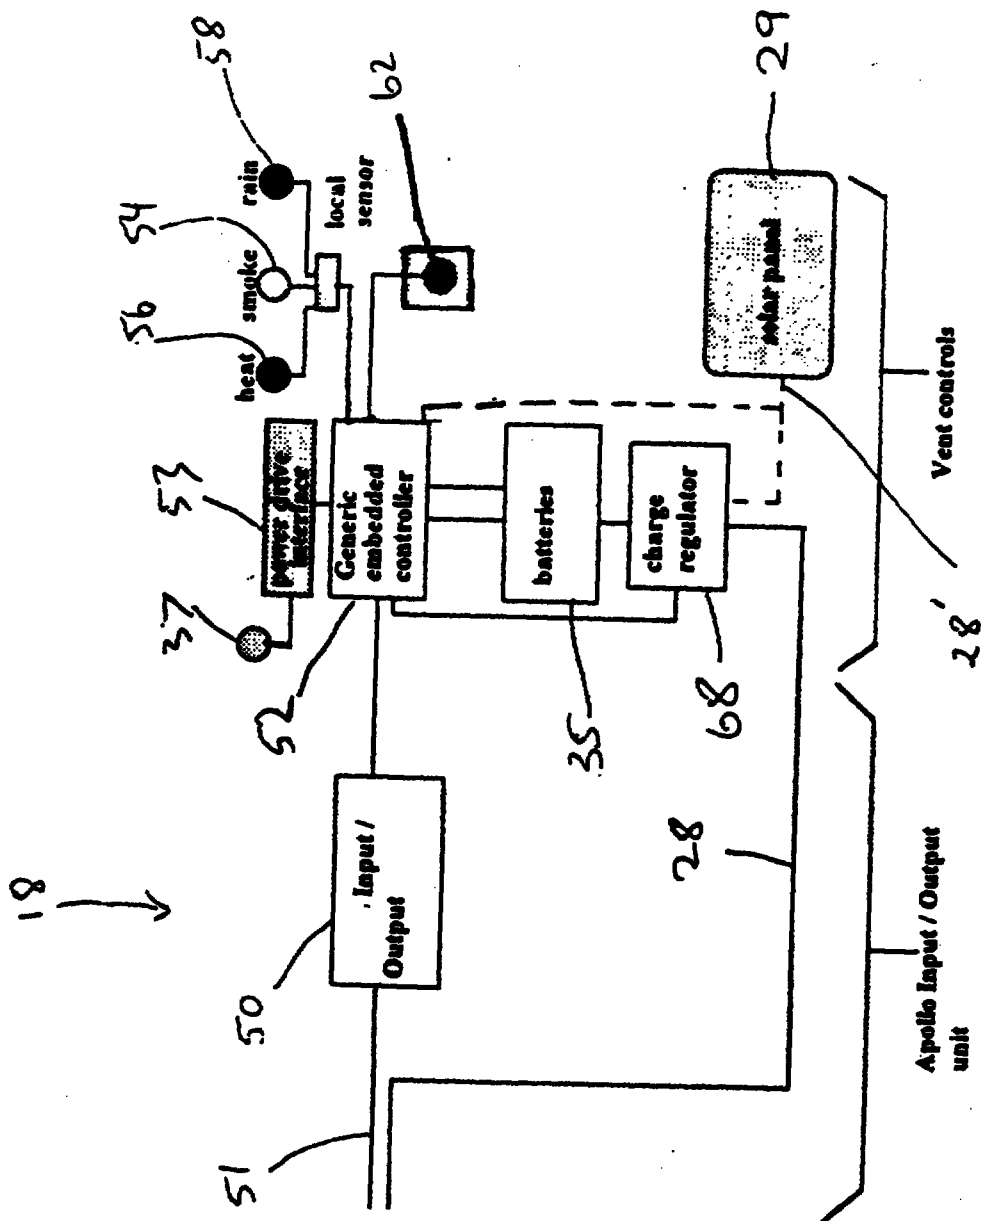


Fig 2

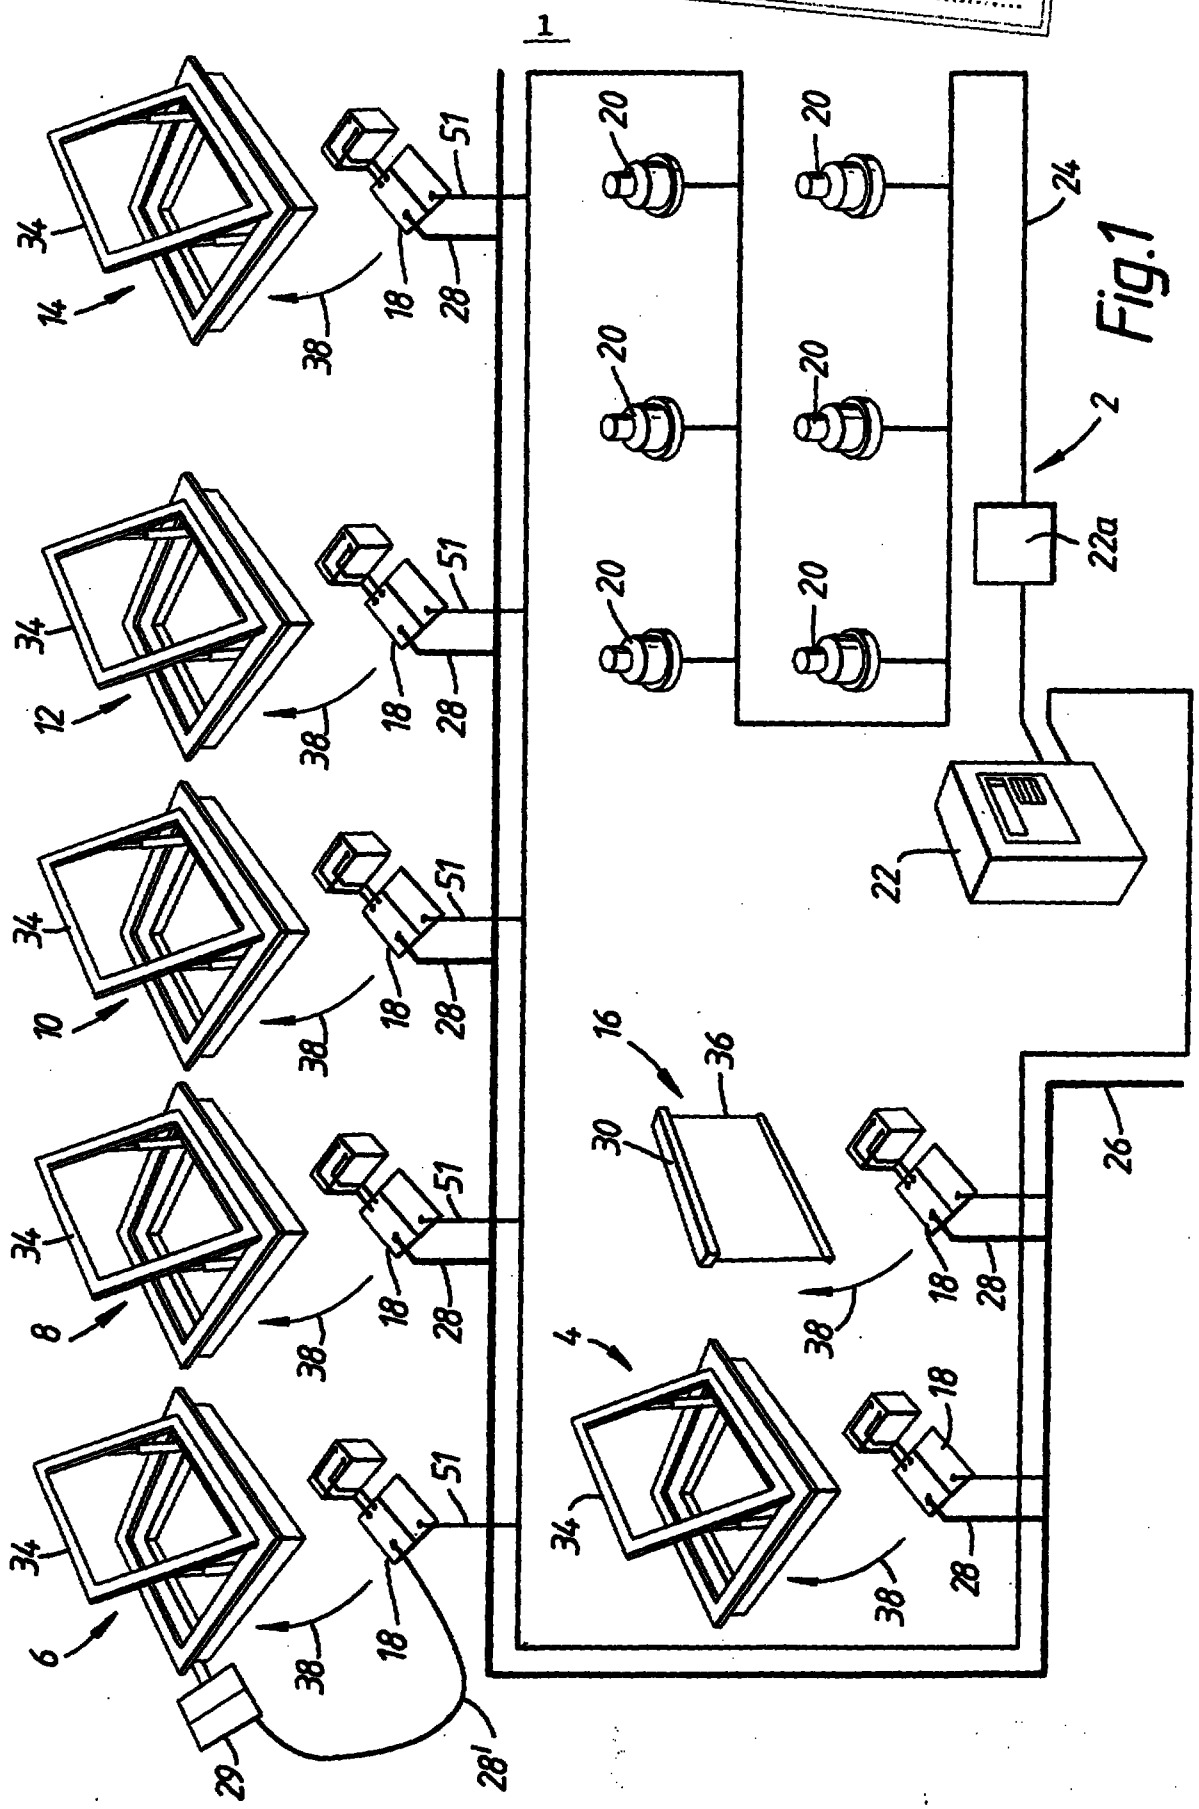


Fig. 1


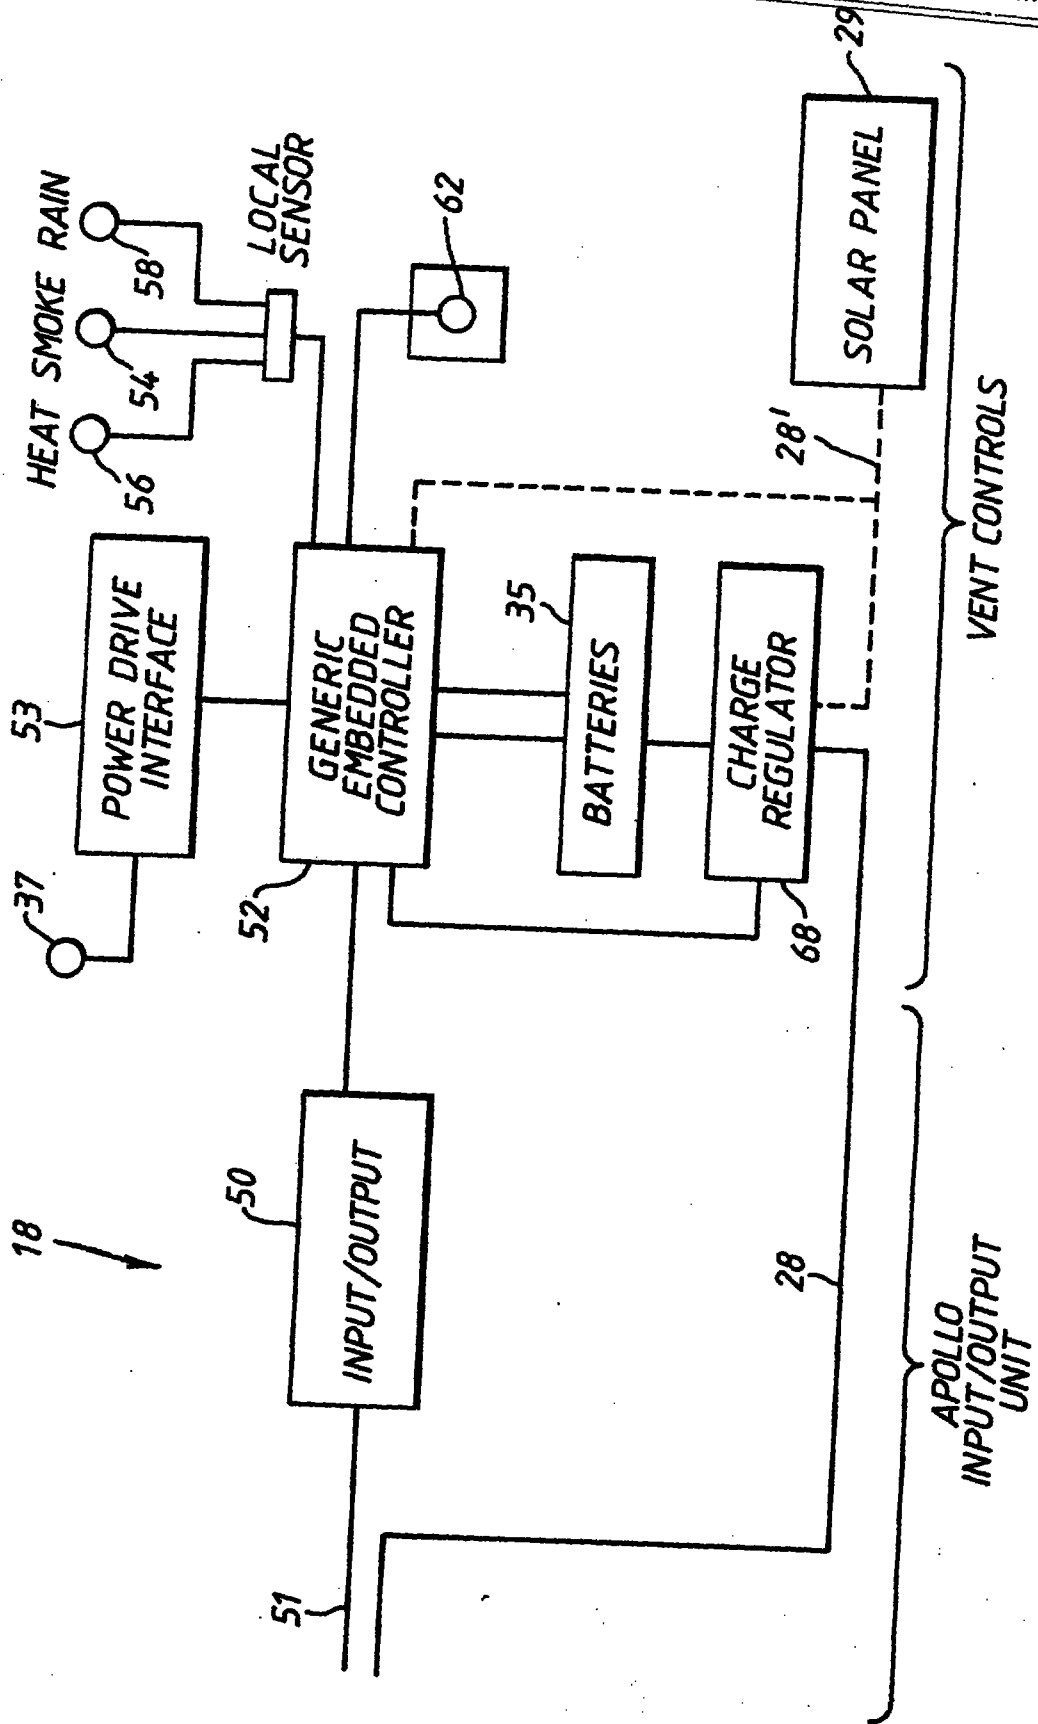


Fig. 2

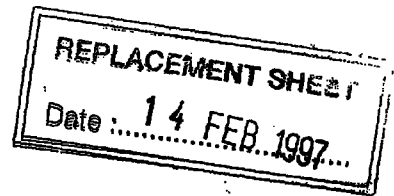

-4-

often need to be supplied with a high electrical current so the component could be moved between states quickly. The wiring through the building would therefore require a high current carrying capability.

The present invention seeks to provide an improved safety apparatus and accordingly provides a safety apparatus including a component having at least a first state and an emergency state and movable between the states by one or more actuators under the control of a controller in which the actuators are powered solely by an energy storage means arranged to be recharged at a rate which is smaller than the rate of discharge when powering the actuators and characterised by including energy level monitoring means arranged to monitor the energy stored in the energy storage means to determine if the energy stored in the energy storage means has fallen below a predetermined threshold at which there is sufficient energy in the energy storage means to provide at least a predetermined number of movements of the component between the first state and the emergency state and by the controller having a first control mode in which the controller is able to respond to emergency commands, only, to move the component from the first state to the emergency state and a second control mode in which the controller is able to respond to non-emergency commands to move the component between the first state and the emergency state, the controller being arranged to switch to the first control mode when the energy stored in the energy storage means has fallen below the first threshold level.


The apparatus, preferably, includes an indication means coupled to the monitoring means arranged to provide a visual indication if the energy stored in the energy storage means has fallen below the predetermined threshold. This could be a slowly flashing light or the switching off



REPLACEMENT SHEET
14 FEB 1997
Date :

CLAIMS

1. Safety apparatus including a component (34) having at least a first state and an emergency state and movable between the states by one or more actuators (57) under the control of a controller (18) in which the actuators (57) are powered solely by an energy storage means (35) arranged to be recharged at a rate which is smaller than the rate of discharge when powering the actuators and characterised by including energy level monitoring means arranged to monitor the energy stored in the energy storage means (35) to determine if the energy stored in the energy storage means (35) has fallen below a predetermined threshold at which there is sufficient energy in the energy storage means (35) to provide at least a predetermined number of movements of the component (34) between the first state and the emergency state and by the controller (18) having a first control mode in which the controller (18) is able to respond to emergency commands, only, to move the component from the first state to the emergency state and a second control mode in which the controller (18) is able to respond to non-emergency commands to move the component between the first state and the emergency state, the controller (18) being arranged to switch to the first control mode when the energy stored in

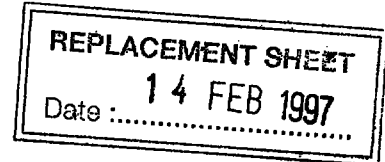

the energy storage means (35) has fallen below the first threshold level.

2. An apparatus as claimed in claim 1 including an indication means (62) coupled to the monitoring means arranged to provide a visual indication if the energy stored in the energy storage means (35) has fallen below the predetermined threshold.


3. An apparatus as claimed in claim 1 or 2 in which the controller (18) is arranged to move the component (34) to a selected one of the states of the component (34) on moving to its first control mode; and, optionally, either or both of

a) the selected one of the states of the component (34) is alterable; and

b) the selected state is the emergency state of the component (34).

4. An apparatus as claimed in any preceding claim in which the component (34) is a ventilator which is closed in the first state and open in the emergency state.

5. An apparatus as claimed in any preceding claim in which the energy storage device comprises a spring

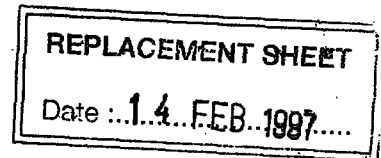

mechanism coupled to an electric motor, a battery (35), or a fluid accumulator.

6. An apparatus as claimed in claim 5 in which the energy storage device is a battery (35) which is trickle charged.

7. An apparatus as claim in claim 6 in which the battery (35) is trickle charged by way of one or more wires (28) connectable to a mains power supply (26) of a building or by a solar cell (29), or in which the battery (35) is trickle charged by way or a direct current trickle charge current carried on a twisted wire pair, which twisted wire pair also carries command signals to the associated controller (18) from a central controller (22).

8. An apparatus as claimed in any preceding claim and including local environmental sensors (54, 56, 58) coupled to the controller (18) which is arranged to be able to operate on the basis of locally derived environmental information from the sensors if desired, which sensors may, optionally, include one or more of a heat sensor (56), smoke sensor (54) and rain sensor (58).

9. An apparatus as claimed in any preceding claim in



22a

REPLACEMENT SHEET
Date : 14 FEB 1997

which there are two more components (34) controlled by a single controller (18).