



(43) International Publication Date
7 February 2013 (07.02.2013)

(51) International Patent Classification:

A47B 57/10 (2006.01) A47B 47/00 (2006.01)
A47B 57/00 (2006.01) A47B 96/00 (2006.01)

(21) International Application Number:

PCT/AU2012/000896

(22) International Filing Date:

27 July 2012 (27.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2011903047 29 July 2011 (29.07.2011) AU

(71) Applicant (for all designated States except US): FSP
HOLDINGS PTY LTD [AU/AU]; 123 Maison Dieu
Road, Singleton, New South Wales 2330 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HEWITT, Stephan
[AU/AU]; 32 Computer Road, Yatala, Queensland 4207
(AU).


(74) Agent: FB RICE & CO; Level 23, 44 Market Street,
Sydney, NSW 2000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: IMPROVEMENTS IN LOCKERS

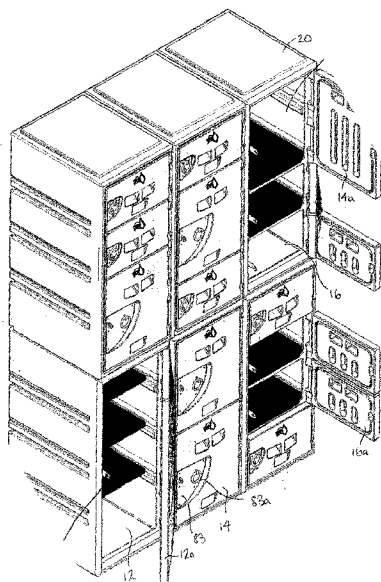

(57) Abstract: A method of making a locker (10) uses a cabinet (20) hav-
ing a rear wall, a top (24), a base and opposed side walls (22). The side
walls defining support means (40) for supporting and preferably engaging
the side edges of a shelf or cabinet divider, projecting into the cabinet.
The cabinet (20) is configured to receive a door (12, 14, 16) mounted to
one side of the cabinet by means of a hinge arrangement. The hinge ar-
rangement includes one or more knuckles (30) defined on the door, and a
series of projections (32) extending along the one side of the cabinet,
spaces being defined between the projections (32) for receiving a knuckle
(30) of a door therebetween. The support means (40) are defined adjacent
the projections (32) and between the recesses moulded. The cabinet is
moulded with a closed front face and the front face is selectively removed
to define one or more apertures. Next one or more dividers or shelves
is/are inserted into the cabinet as required and one or more doors are at-
tached to the cabinet.

WO 2013/016763 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*