

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


0803704-7

K7MP6
copy.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/36 ✓	A1	(11) International Publication Number: ✓ WO 97/27715 (43) International Publication Date: 31 July, 1997 (31.07.97)
(21) International Application Number: ✓ PCT/SE96/00111 (22) International Filing Date: ✓ 31 January 1996 (31.01.96) (30) Priority Data: ✓ 9600245-6 ✓ 23 January 1996 (23.01.96) ✓ SE (71) Applicant (for all designated States except US): COMVIQ GSM AB [SE/SE]; P.O. Box 123, S-129 23 Hågersten (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): LINDKVIST, Erik [SE/SE]; Klostervägen 1B, S-182 76 Stocksund (SE). (74) Agents: ÖRTENBLAD, Bertil et al.; Noréns Patentbyrå AB, P.O. Box 10198, S-100 55 Stockholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPG patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AZ, BY, KG, KZ, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: A METHOD FOR DENSIFYING A TRANSMITTER AND RECEIVER NETWORK FOR MOBILE TELEPHONY ✓

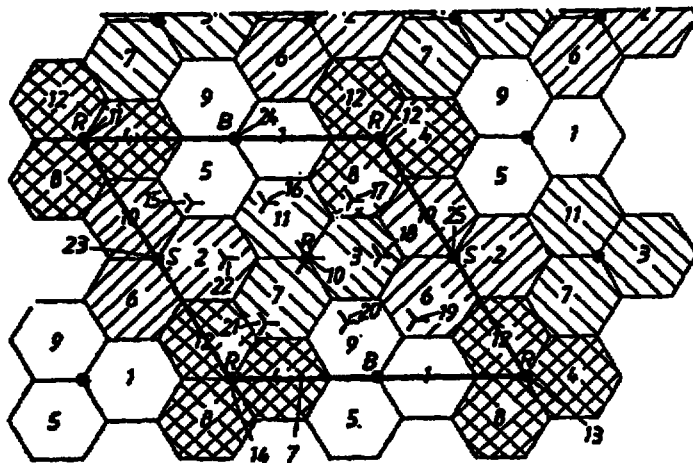

(57) Abstract

A method for densifying a transmitter and a receiver network for mobile telephony, the network being comprised of base stations which each have three cells whose directions are mutually spaced by 120 degrees, where at least four different base stations have mutually different frequency-sets in the cells, and where base stations of different frequency-sets are being placed in a repetitive pattern, i.e. a so-called 4/12-frequency pattern. A first densification is achieved by causing a centre base station (10) that has a first frequency-set (G) and is located in a generally rhomboidal pattern to change its frequency-set to the same frequency-set (R) as the base stations (11-14) located in the corners of the rhomboidal pattern (7); by arranging further base stations (15-22) inwardly of the confines of the rhomboidal pattern (7); and selecting the frequency-sets of respective further base-stations (15-22) so that the frequency or frequencies of their cells will deviate from the frequency or frequencies of the cells of the nearest base stations.