



- (51) **International Patent Classification:**
H04W 48/18 (2009.01) *H04W 60/06* (2009.01)
- (21) **International Application Number:**
PCT/EP2024/076238
- (22) **International Filing Date:**
19 September 2024 (19.09.2024)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2315078.2 02 October 2023 (02.10.2023) GB
- (71) **Applicant:** **NOKIA TECHNOLOGIES OY** [FI/FI];
Karakaari 7, 02610 Espoo (FI).
- (72) **Inventors:** **LEON CALVO, Jose Angel**; Werinherstrasse
91, 81541 Munich (DE). **WON, Sung Hwan**; 3201 Olym-
pus Boulevard, Dallas, Texas 75019 (US).
- (74) **Agent:** **NOKIA EPO REPRESENTATIVES**; Nokia
Technologies Oy, Karakaari 7, 02610 ESPOO (FI).
- (81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE

- (54) **Title:** DISABLING N1 MODE UPON RECEIVING A 5GMM CAUSE VALUE MESSAGE

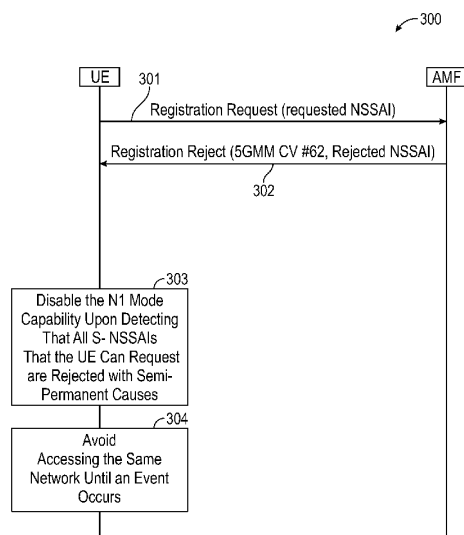


FIG. 3

(57) **Abstract:** A method includes transmitting, by a user equipment (UE), a first message to a network node, the first message including a request for access to a first network according to a non-access stratum (NAS) protocol. The UE receives a second message from the network node, the second message including an indication of no network slice being available to service access to the first network requested by the UE. The UE disables a capability to access networks using the NAS protocol based upon the receiving the second message, stores an identity of the first network, and after storing, exploits the stored identity of the first network, by the UE, during a network selection process.