

(51) International Patent Classification:
H04W 88/08 (2009.01)(21) International Application Number:
PCT/IL2011/000587(22) International Filing Date:
21 July 2011 (21.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
207180 25 July 2010 (25.07.2010) IL(71) Applicant (for all designated States except US): **ELTA SYSTEMS LTD.** [IL/IL]; 100 Yitzhak Hanassi Blvd., P.O.B. 330, 77102 Ashdod (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHOSHAN, Yaakov** [IL/IL]; 17a Habustan Street, 78501 Ashkelon (IL). **KOIFMAN, Gil** [IL/IL]; 4 Neot Margalit Street, 49586 Petach-Tikva (IL). **BITRAN, Yigal** [IL/IL]; 17 Levona Street, 47226 Ramat Hasharon (IL).(74) Agent: **REINHOLD COHN AND PARTNERS;** P.O.B.13239, 61131 Tel Aviv (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: SWITCHED APPLICATION PROCESSOR APPARATUS FOR CELLULAR DEVICES

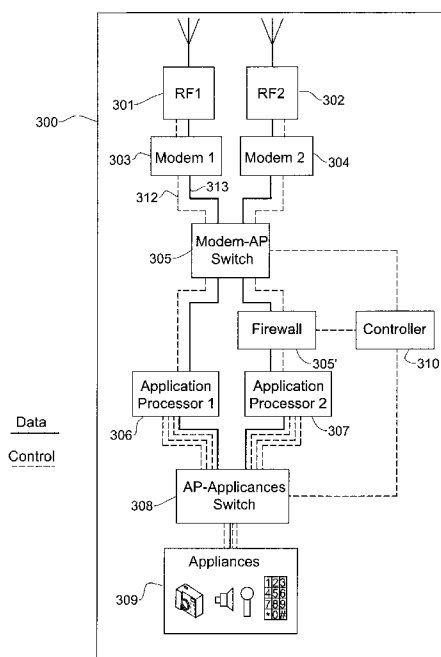


Fig. 3

(57) Abstract: A cellular device architecture, including two application processors connectable through a Modem-AP Switch to two modems, each communicating with a respective antenna. A Controller module coupled to the switch and being configured, in response to receipt of data received in the Modem-AP switch as received through an antenna, to command the switch to select a processing route, whereby one of the application processors is switched to connect to one of the modems and to its associated antenna.