

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 August 2001 (30.08.2001)

PCT

(10) International Publication Number
WO 01/63199 A1

(51) International Patent Classification⁷: F42B 1/028

Motzkin (IL). AVITAN, Mordechai [IL/IL]; 33 Yyosef Shprinzak St., 26356 Kiryat Motzkin (IL).

(21) International Application Number: PCT/IL01/00147

(74) Agent: FRIEDMAN, Mark, M.; Beit Samueloff, 7 Haomanim St., 67897 Tel Aviv (IL).

(22) International Filing Date: 16 February 2001 (16.02.2001)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(26) Publication Language: English

(30) Priority Data:
134735 25 February 2000 (25.02.2000) IL
140445 20 December 2000 (20.12.2000) IL

(71) Applicant (*for all designated States except US*):
RAFAEL-ARMAMENT DEVELOPMENT AUTHORITY LTD. [IL/IL]; P.O. Box 2250, 31021 Haifa (IL).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): RITMAN, Zeev [IL/IL]; 36 Hanita St., 32440 Haifa (IL). KLIMINZ, Gershon [IL/IL]; 35/40 Hashmonaim St., 26337 Kiryat

Published:
— with international search report

[Continued on next page]

(54) Title: WARHEAD CONFIGURATION

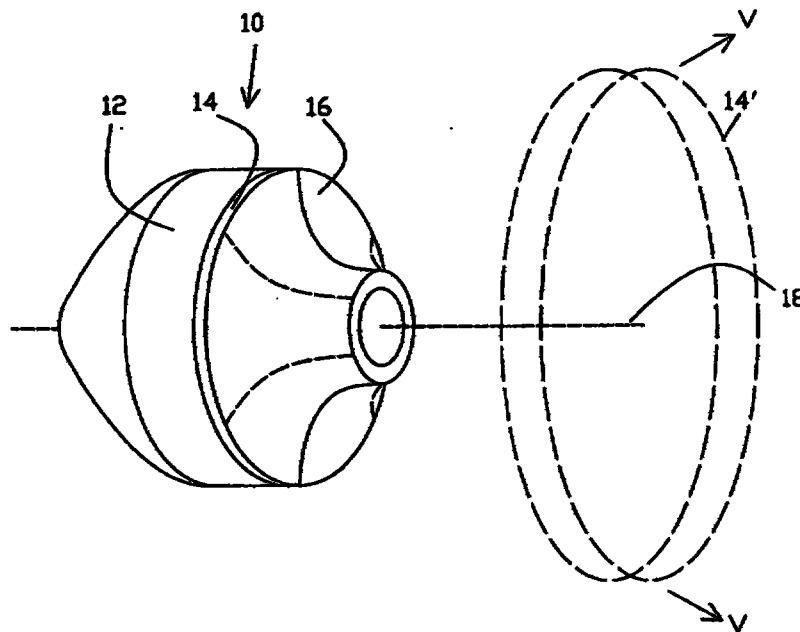

(57) Abstract: A warhead (10) configuration for forming a large-diameter hole through a wall of a target includes a shaped charge of explosive material (12) presenting an annular front surface portion (16) circumscribing an axis of the charge. The annular front surface portion (16) exhibits a concave profile as viewed in cross-section through the axis, at least part of the concave profile being configured such that a vector projecting outward from the part normal to the annular front surface portion diverges from the axis. A liner (14) is provided adjacent to at least part of the annular front surface portion.

WO 01/63199 A1



- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*