



(51) International Patent Classification:

B04B 1/20 (2006.01) *B04B 11/02* (2006.01)
B04B 7/02 (2006.01) *B04B 13/00* (2006.01)

(21) International Application Number:

PCT/DK2011/050436

(22) International Filing Date:

14 November 2011 (14.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2010 70484 12 November 2010 (12.11.2010) DK

(71) Applicant (for all designated States except US): **ALFA LAVAL CORPORATE AB** [SE/SE]; Box 73, S-221 00 Lund (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MADSEN, Bent** [DK/DK]; Snogegaardsvej 29, DK-2820 Gentofte (DK). **REIFF, Henrik** [DK/DK]; Syrenvænget 21, DK-3520 Farum (DK).(74) Agents: **JØRGENSEN, Bjørn, Barker** et al.; Awapatent A/S, Rigensgade 11, DK-1316 København K (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: A CENTRIFUGAL SEPARATOR AND AN OUTLET ELEMENT FOR A CENTRIFUGAL SEPARATOR

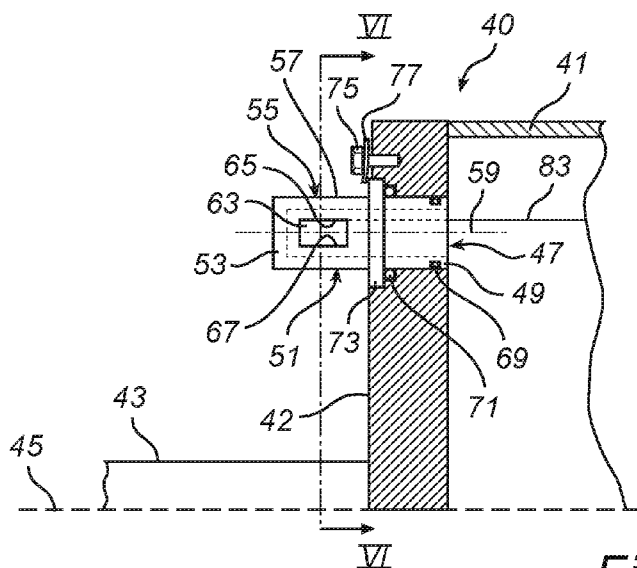


Fig. 5

(57) **Abstract:** A centrifugal separator comprises a rotating body (40) rotating in use around an axis (45). The rotating body (40) comprises a bowl (41), which comprises a base (42) at one longitudinal end of said bowl, said base defining a rear longitudinal area. An outlet passage (47) extends through the base and an outlet housing (55) is provided in the rear longitudinal area. The outlet housing (55) is communicating with the outlet passage to receive liquid therefrom and the outlet opening (63) discharging in use liquid from the rotating body. The outlet opening (63) comprises a weir edge (65) defining in normal use a level (83) of a surface of a liquid in the bowl. The outlet housing (55) is rotatable around an adjustment axis (59) and the outlet opening (63) is placed in a side wall (57) offset from the adjustment axis (59).



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) **Date of publication of the international search report:**
25 April 2013