

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/099512 A2

- (51) International Patent Classification⁷: **E02F**
- (21) International Application Number:
PCT/US2004/011383
- (22) International Filing Date: 14 April 2004 (14.04.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/425,605 30 April 2003 (30.04.2003) US

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **JONES, Darren, F.** [US/US]; P.O. Box 10024, Portland, OR 97296-0024 (US).


Published:

— *without international search report and to be republished upon receipt of that report*

(74) Agent: **SCHAD, Steven, P.**; Banner & Witcoff, Ltd., 11th floor, 1001 G Street, NW, Washington, DC 20001-4597 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: WEAR ASSEMBLY FOR EXCAVATOR DIGGING EDGE

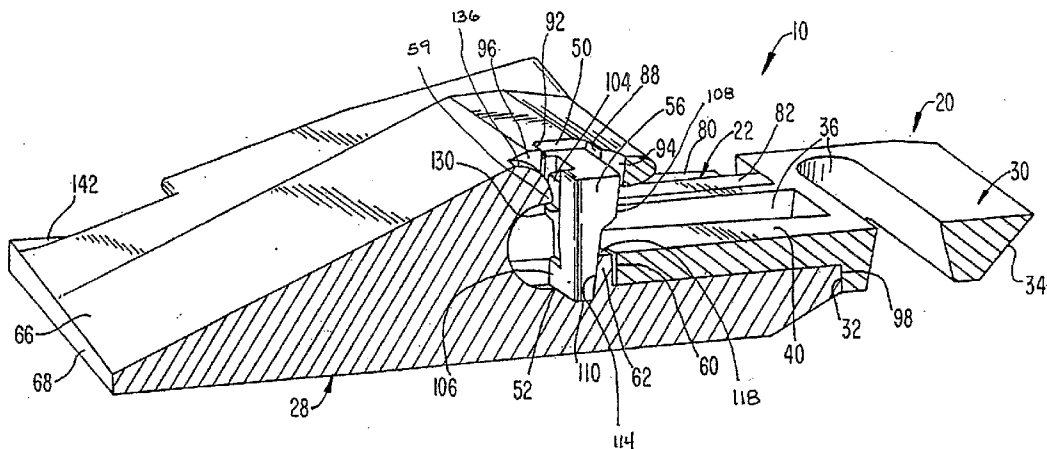

(57) Abstract: A wear assembly that includes a wear member and a boss to define an opening for receiving a lock forward of the front edge face of the lip which can mount the wear member in a stable and balanced manner without a through-hole in the lip. The wear member includes an aperture and a rib to define bearing faces on opposite sides of a central plane of the lip. The boss includes rails to hold the wear member in place, and a brace at the rear end, which supports the rails on the boss, abuts the rear of the wear member to reduce the loading on the lip, and deflects earthen material away from the wear member under reverse loading.

WO 2004/099512 A2