

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number  
**WO 2005/052494 A2**

- (51) International Patent Classification<sup>7</sup>: **F41G**
- (21) International Application Number:  
PCT/US2004/023664
- (22) International Filing Date: 21 July 2004 (21.07.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/624,293 21 July 2003 (21.07.2003) US
- (71) Applicant: **RAYTHEON COMPANY** [US/US]; 870 Winter Street, Office of the General Counsel, Waltham, MA 02451 (US).
- (72) Inventors: **TOWERY, Clay, E.**; 3301 Westclarke Drive, Plano, TX 75093 (US). **FLORENCE, James, M.**; 4803 Stony Ford Drive, Dallas, TX 75287 (US).
- (74) Agent: **SCHUBERT, William, C.**; c/o Raytheon Company, 2000 East El Segundo Boulevard, M/S EO/E04/N119, P. O. Box 902, El Segundo, CA 90245-0902 (US).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: ELECTRONIC FIREARM SIGHT, AND METHOD OF OPERATING SAME

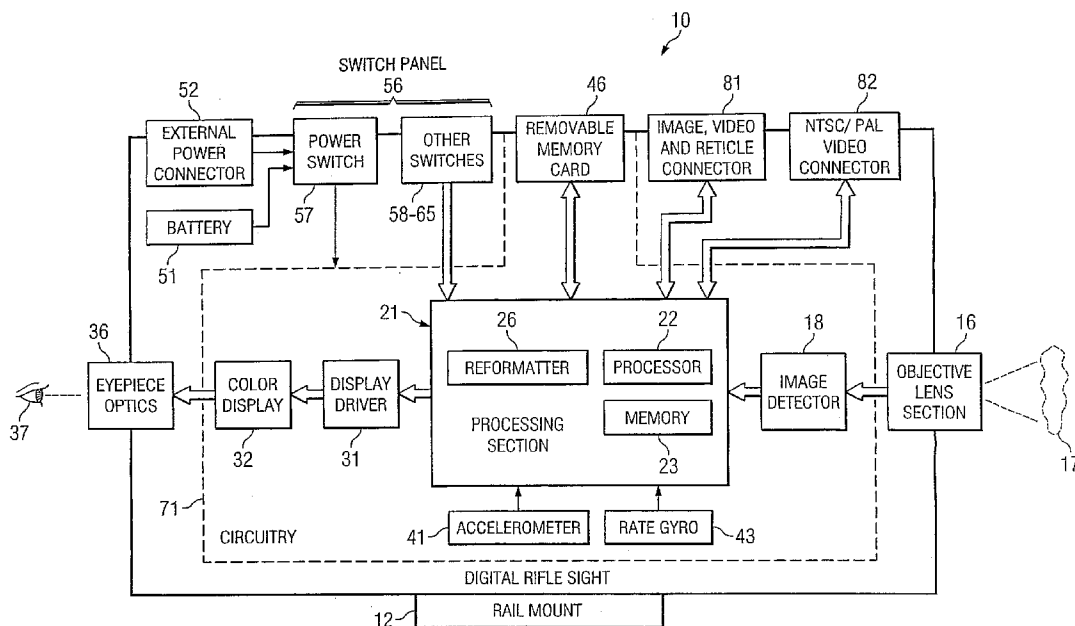

(57) Abstract: A firearm sight can detect engagement of a firing pin with a cartridge, and can respond to this event by saving an image which shows a target and reticle at a point in time just prior to the detected event. An electronic reticle can be downloaded into the sight. The effective position of the reticle within the sight can be adjusted electronically, and a zoom factor of the sight can be adjusted electronically. The sight can sense approximately transverse movement thereof, and can provide a user with an indication of the amount of transverse movement. With the use of an additional device, the sight can automatically align its reticle to the bore of a firearm on which the sight is mounted.

WO 2005/052494 A2



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*