

FIG. 1



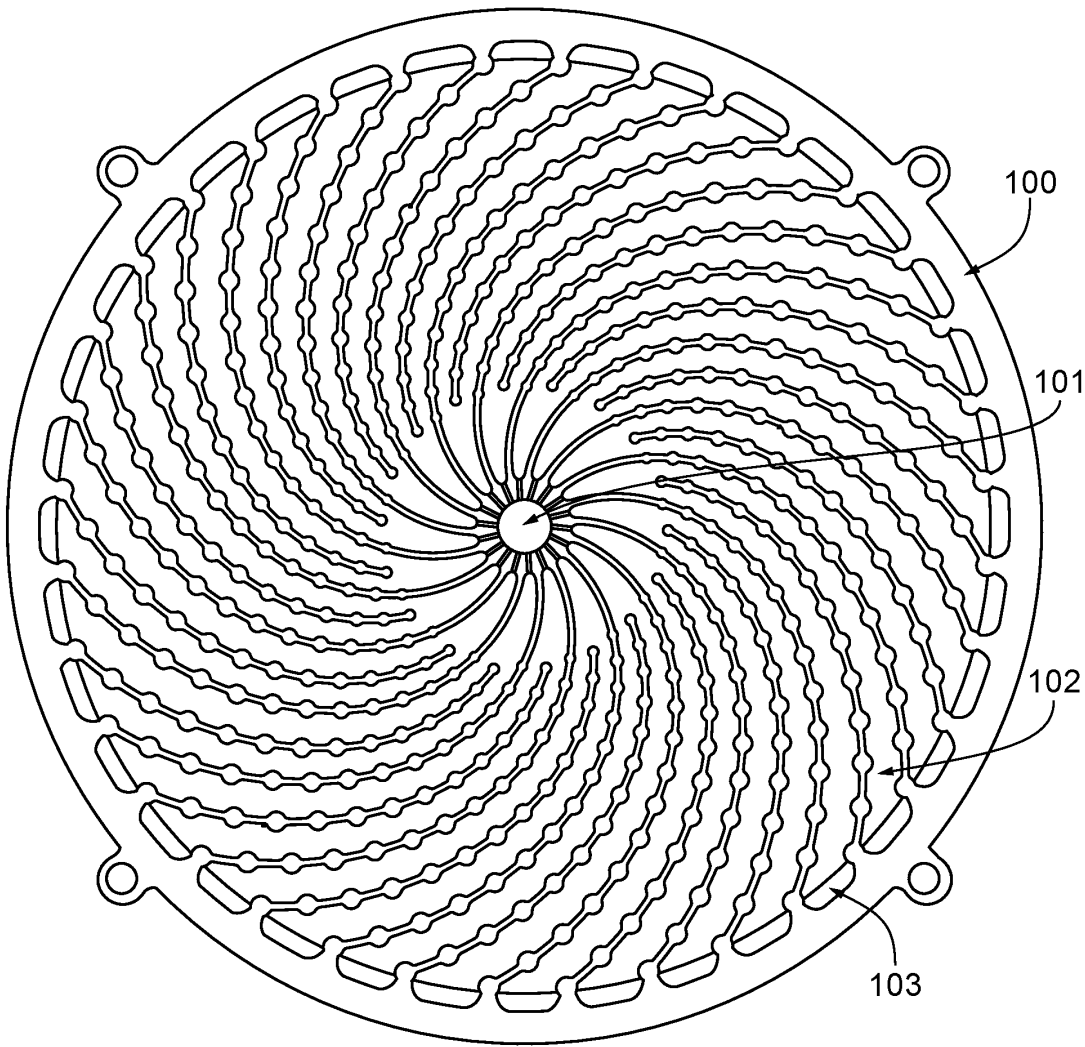


FIG. 1B

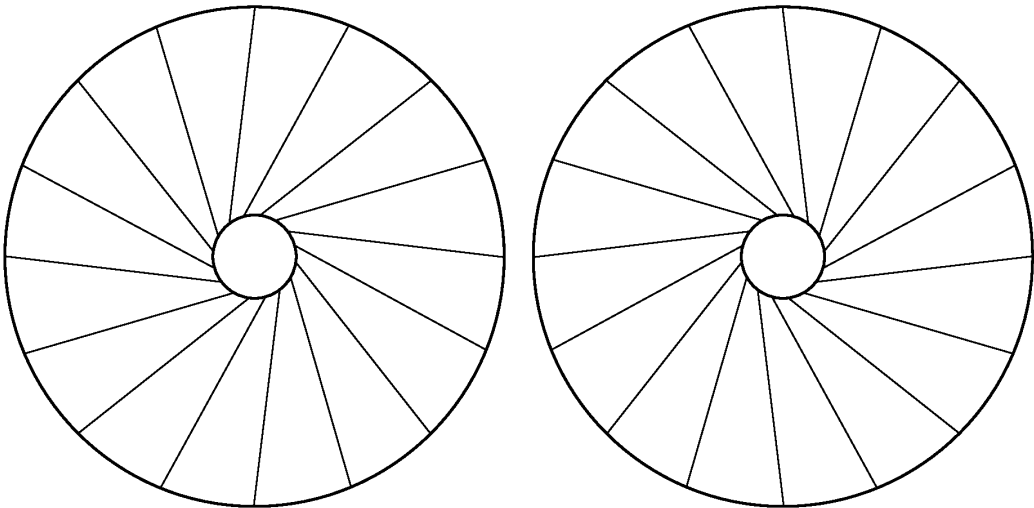


3/25

FIG. 2A

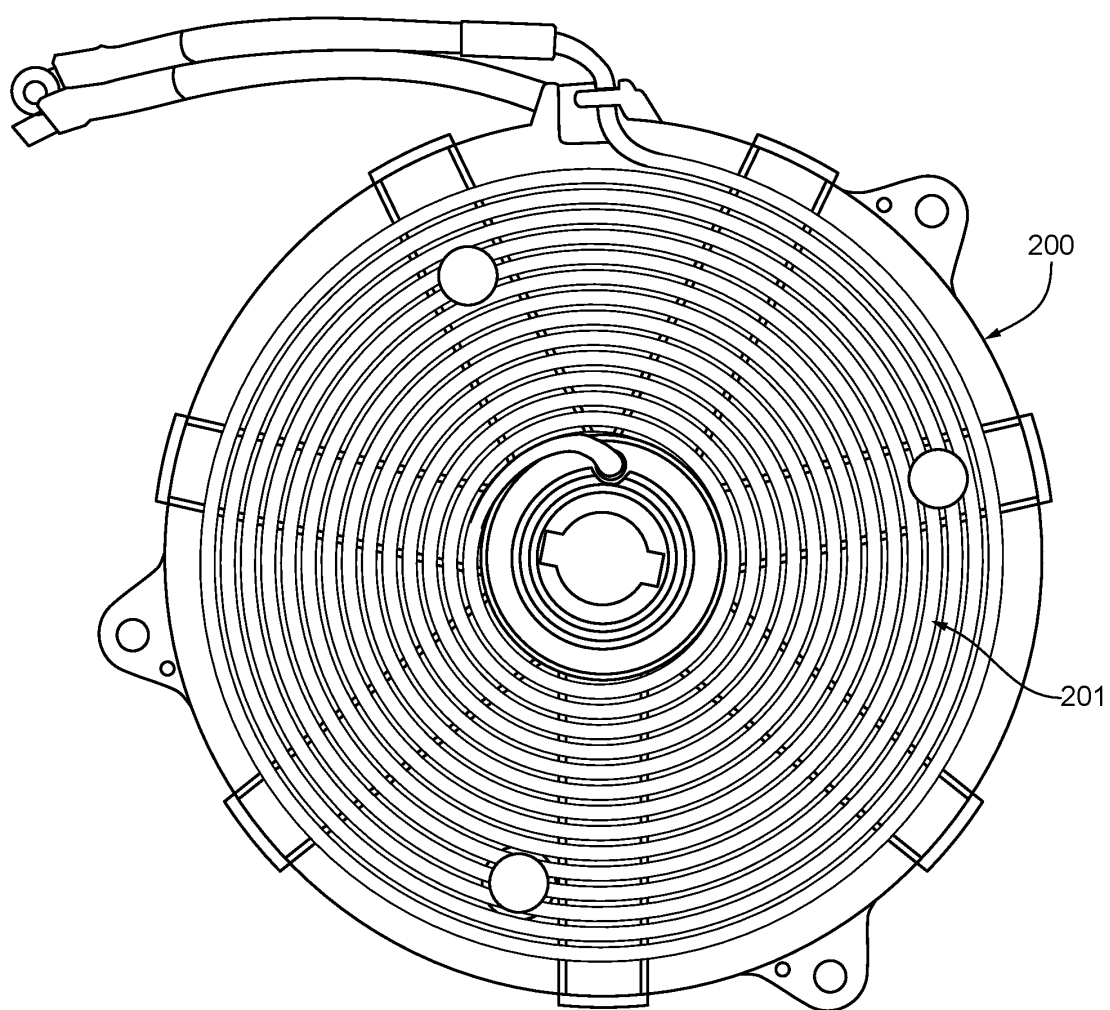

4/25

FIG. 2B

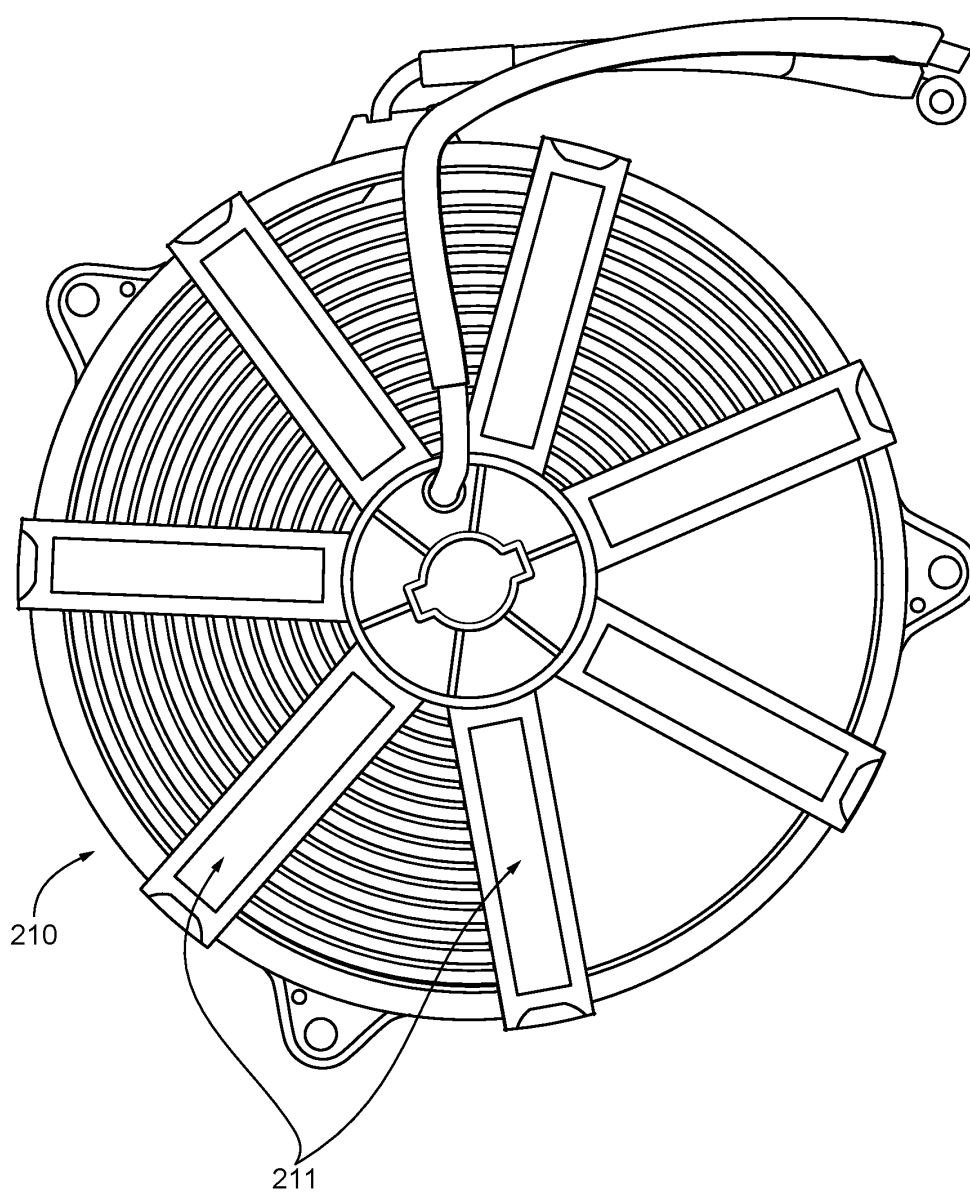

5/25

FIG. 3A

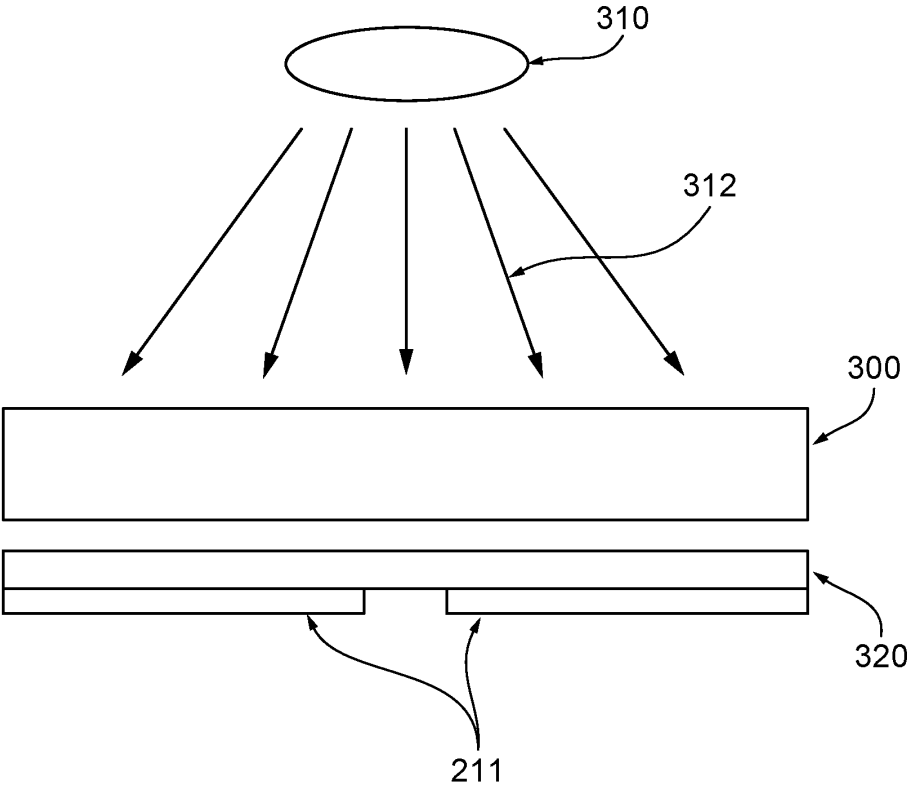


FIG. 3B

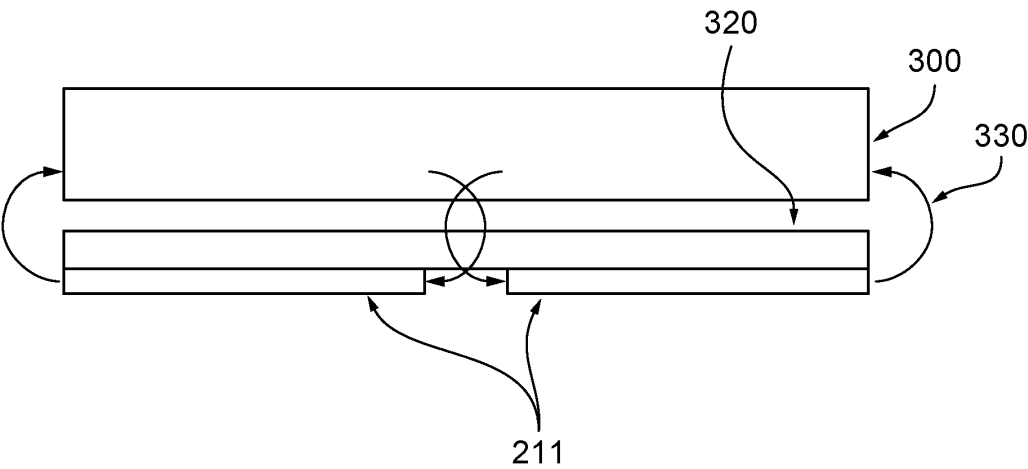


FIG. 4

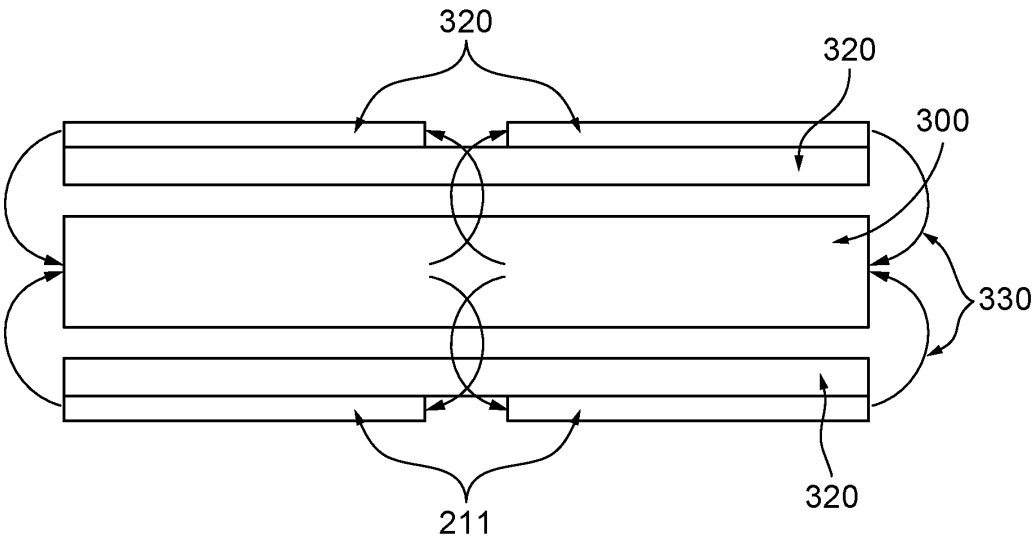


FIG. 5

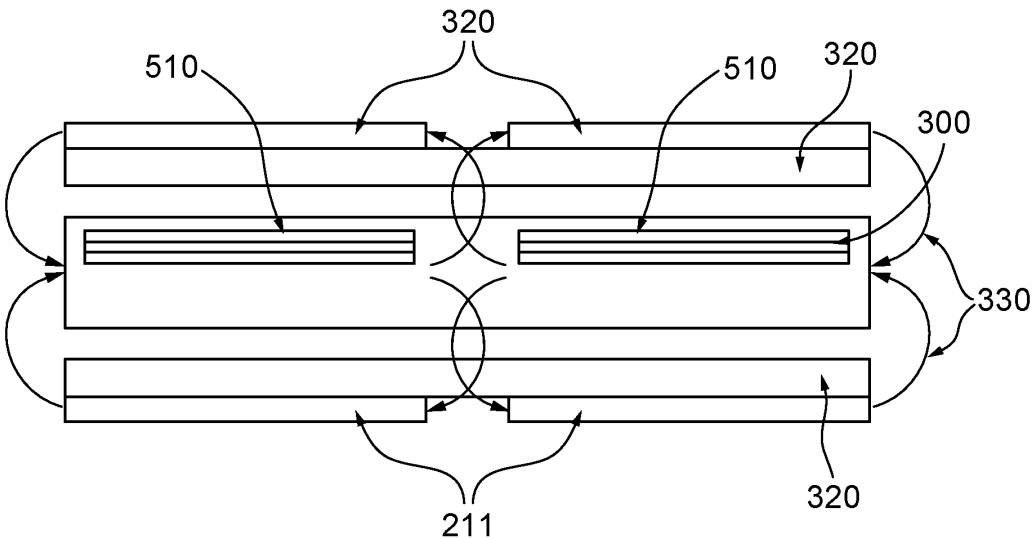


FIG. 5A



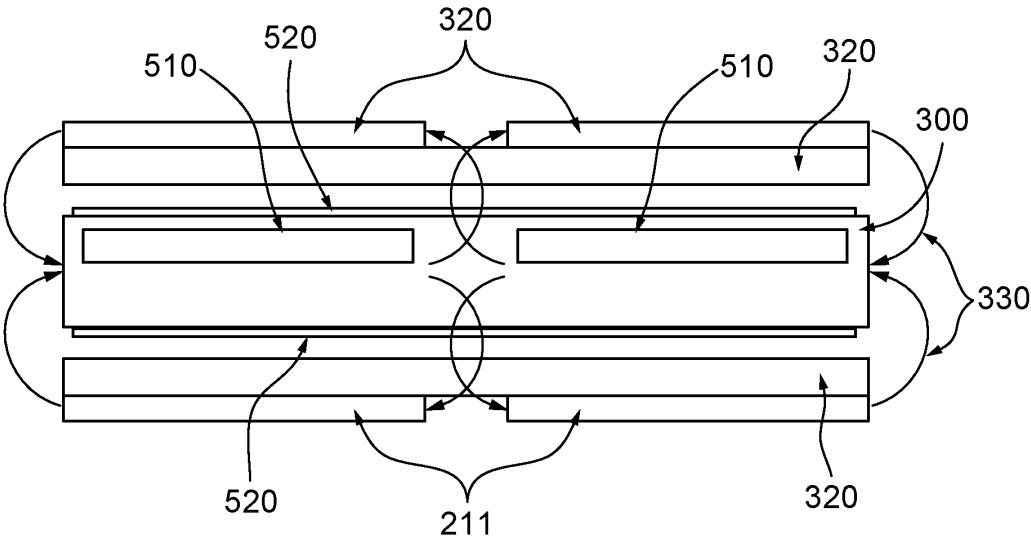


FIG. 6A

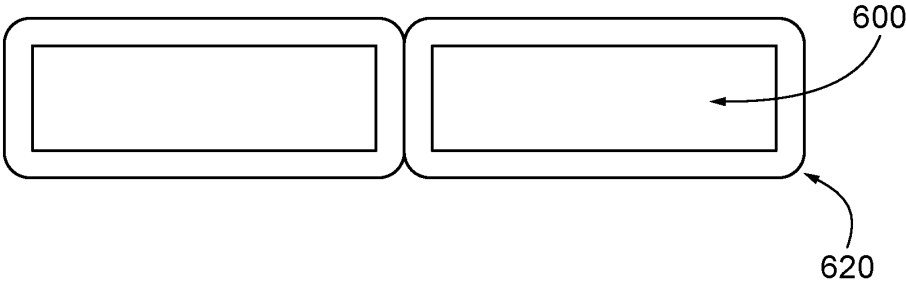


8/25

FIG. 6B

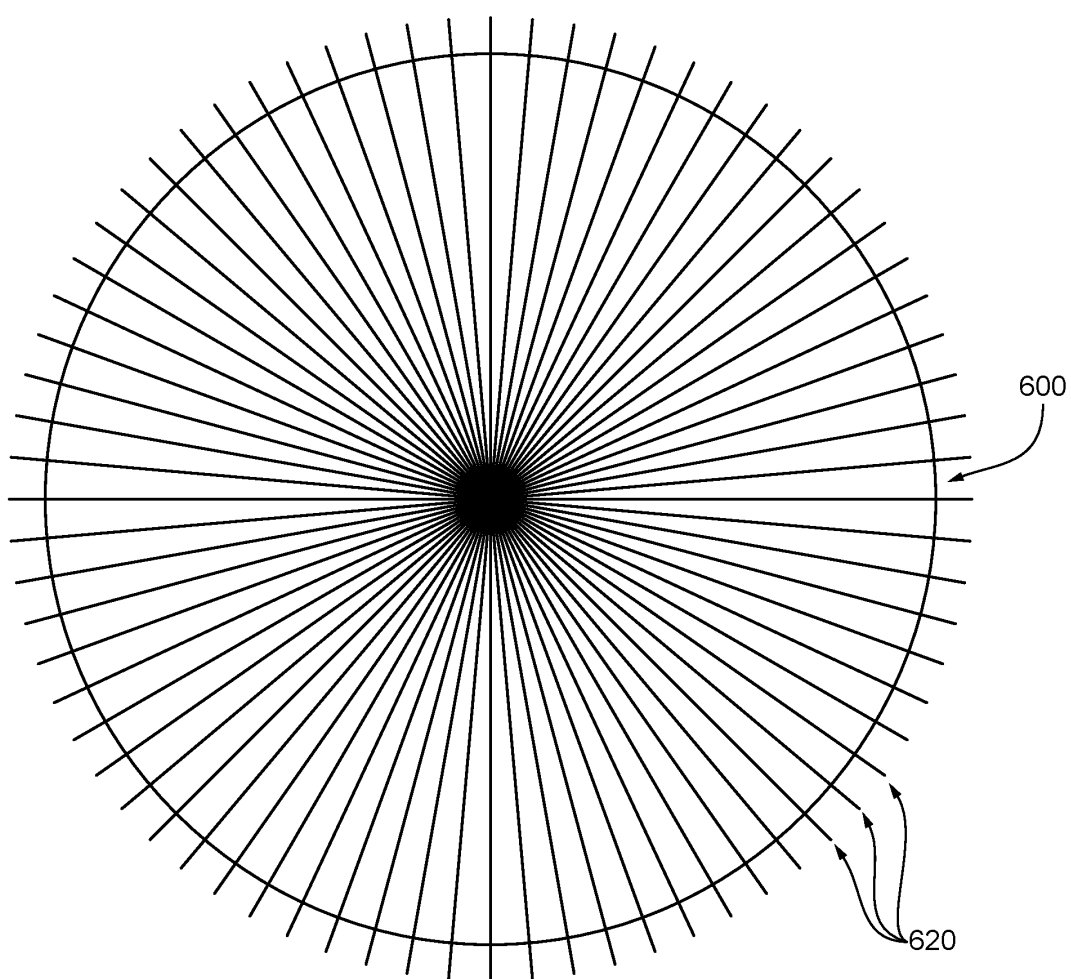


9/25

FIG. 6C

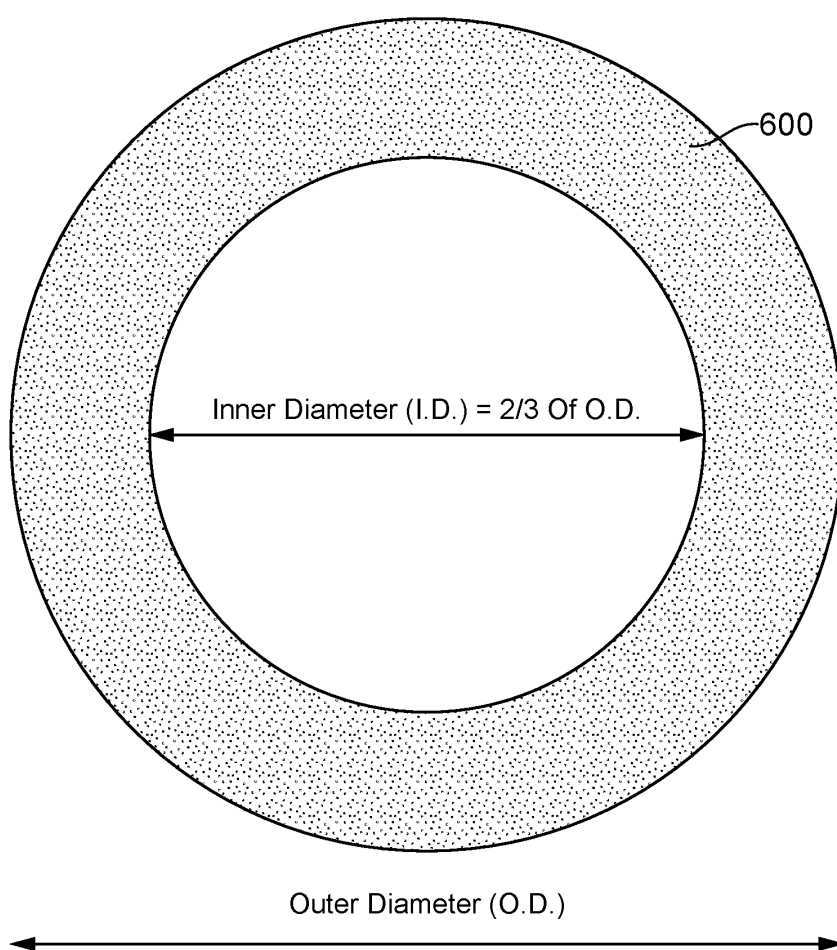

10/25


FIG. 6D

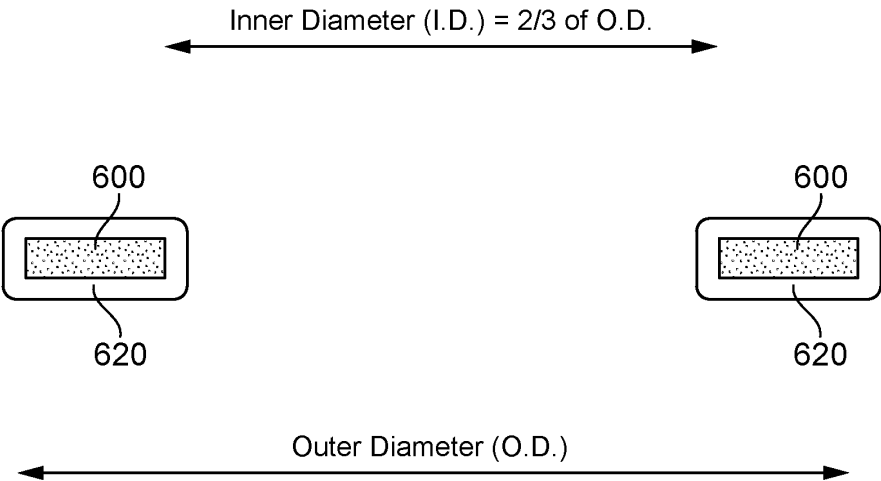

11/25

FIG. 6E

Cross-Section View of Cylindrical Torroidal Receiver/Reactor

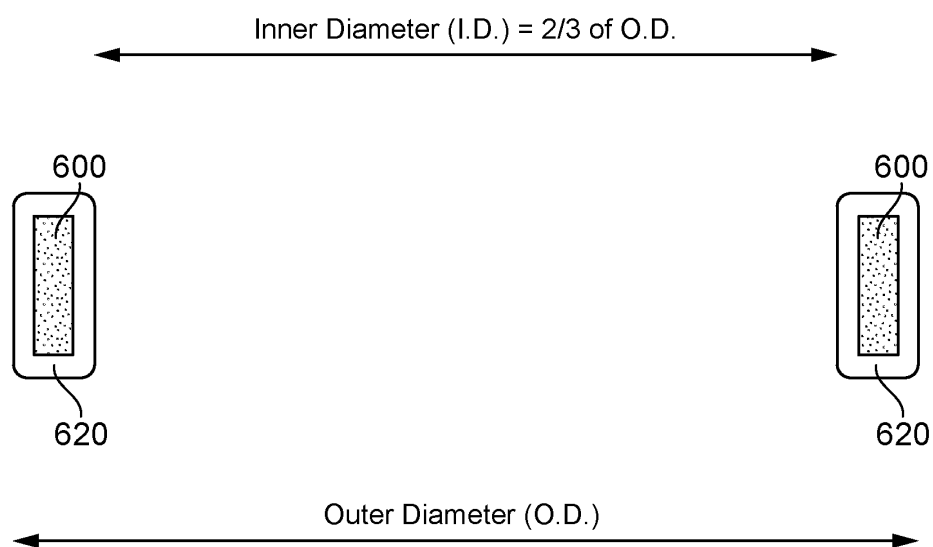

12/25

FIG. 7



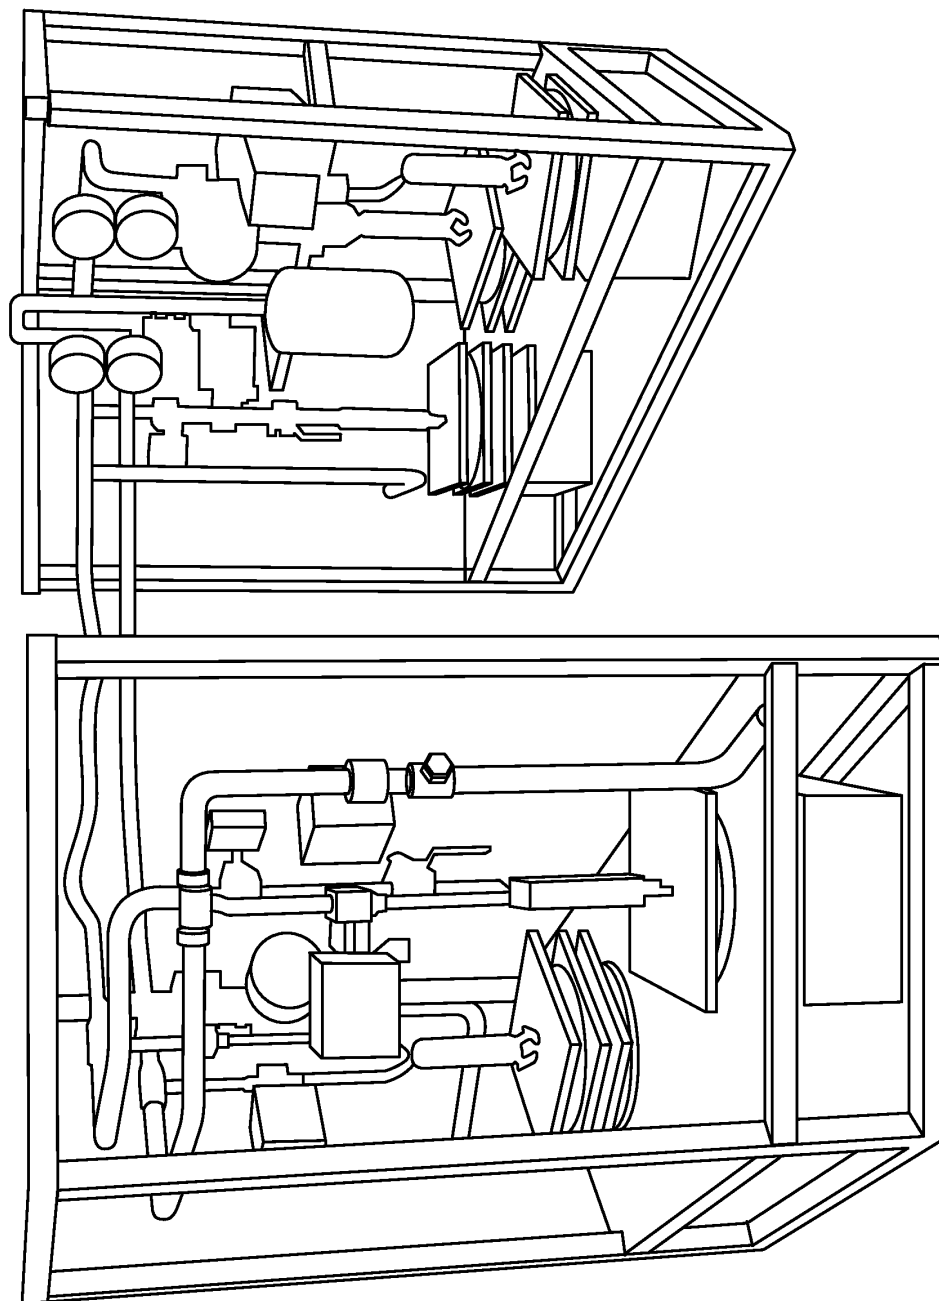


FIG. 8

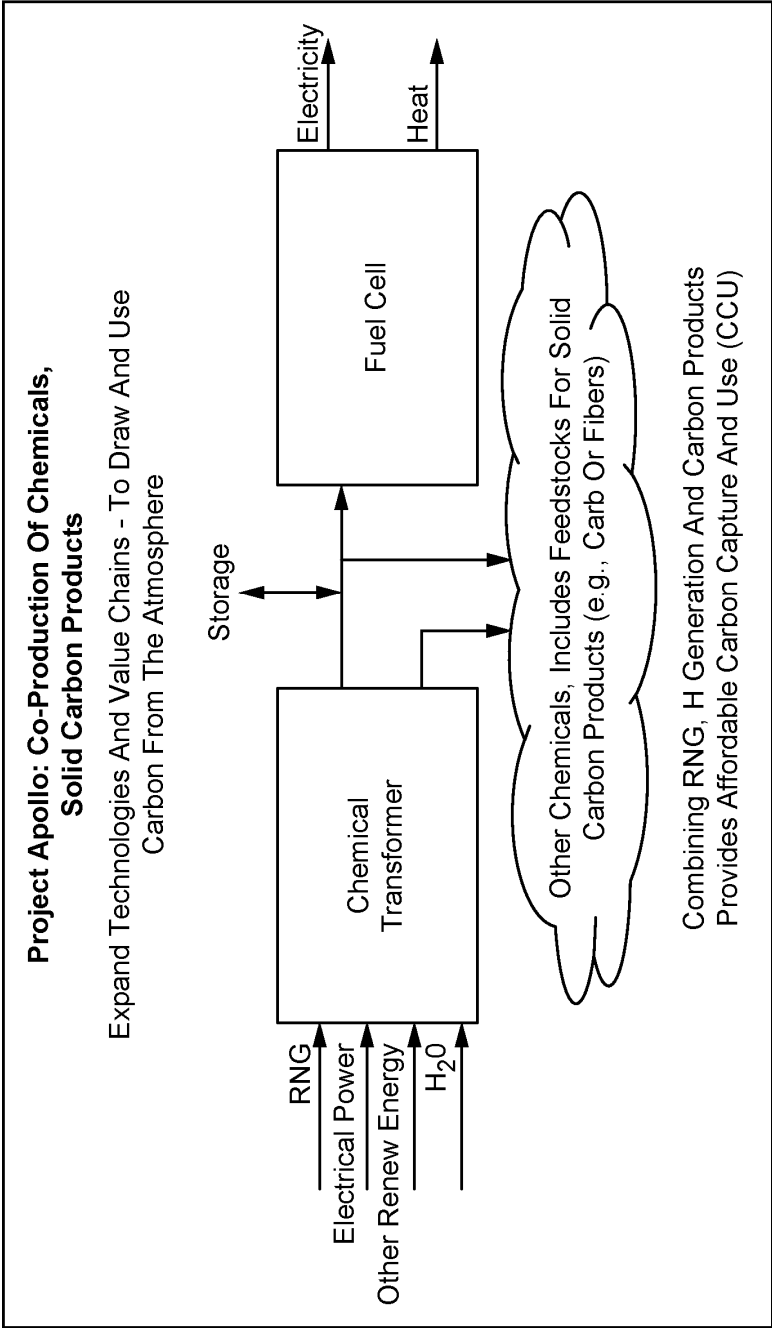

14/25

FIG. 9

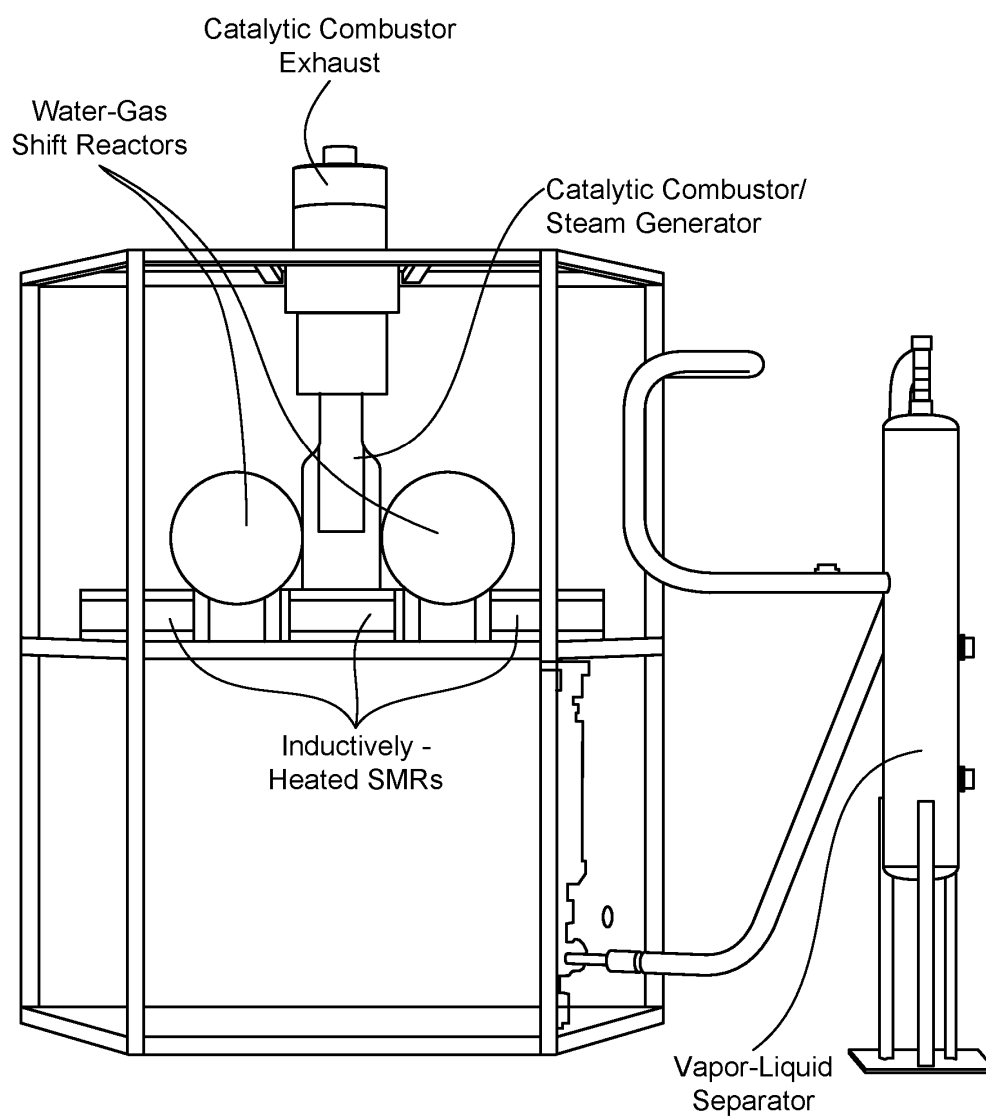

15/25

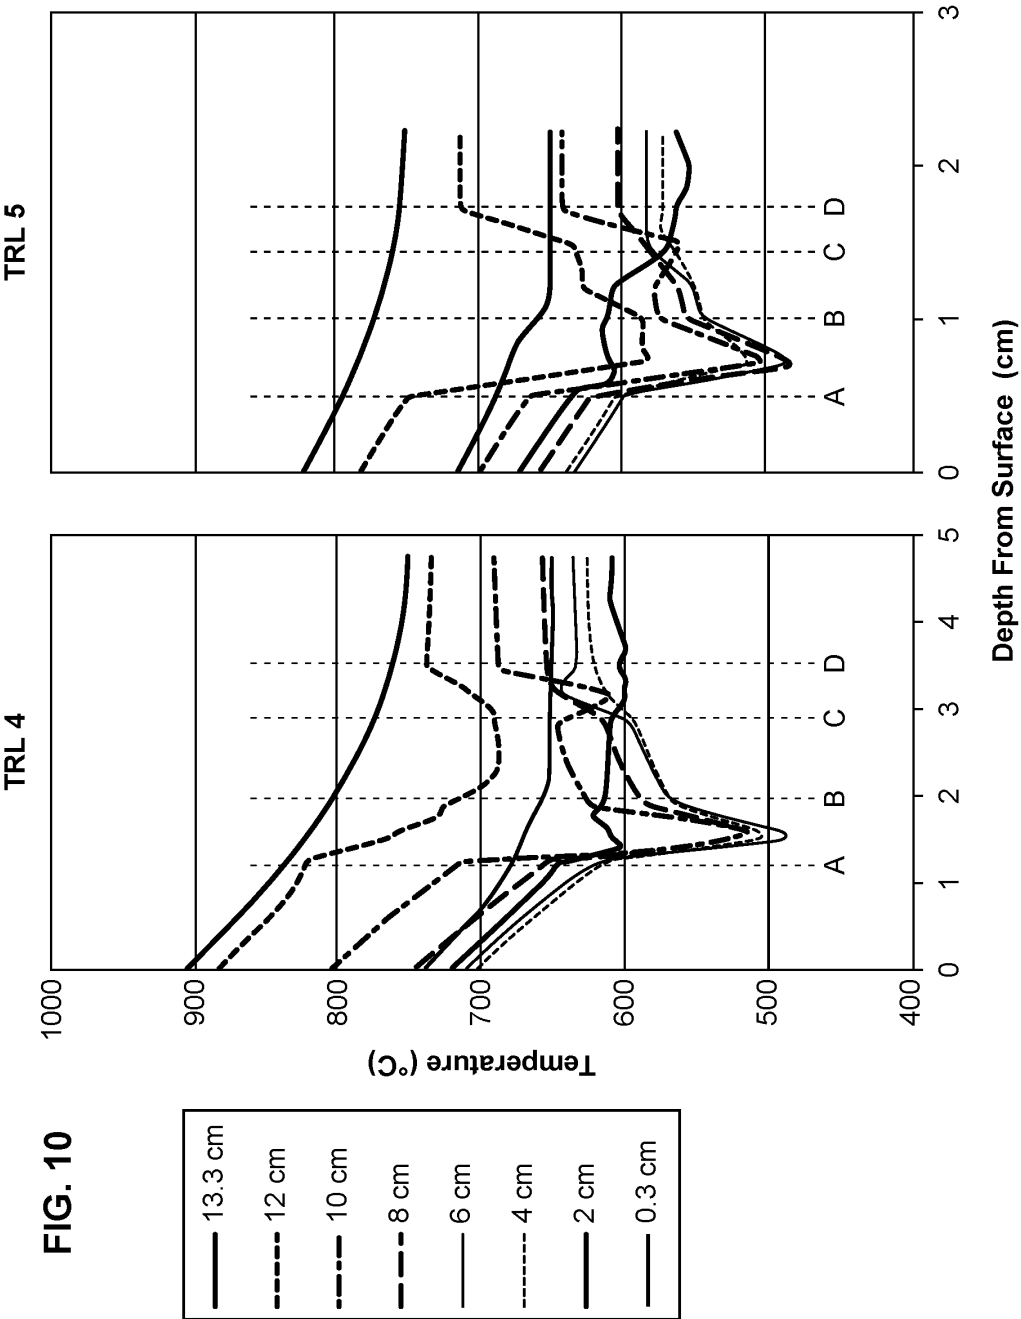


FIG. 11



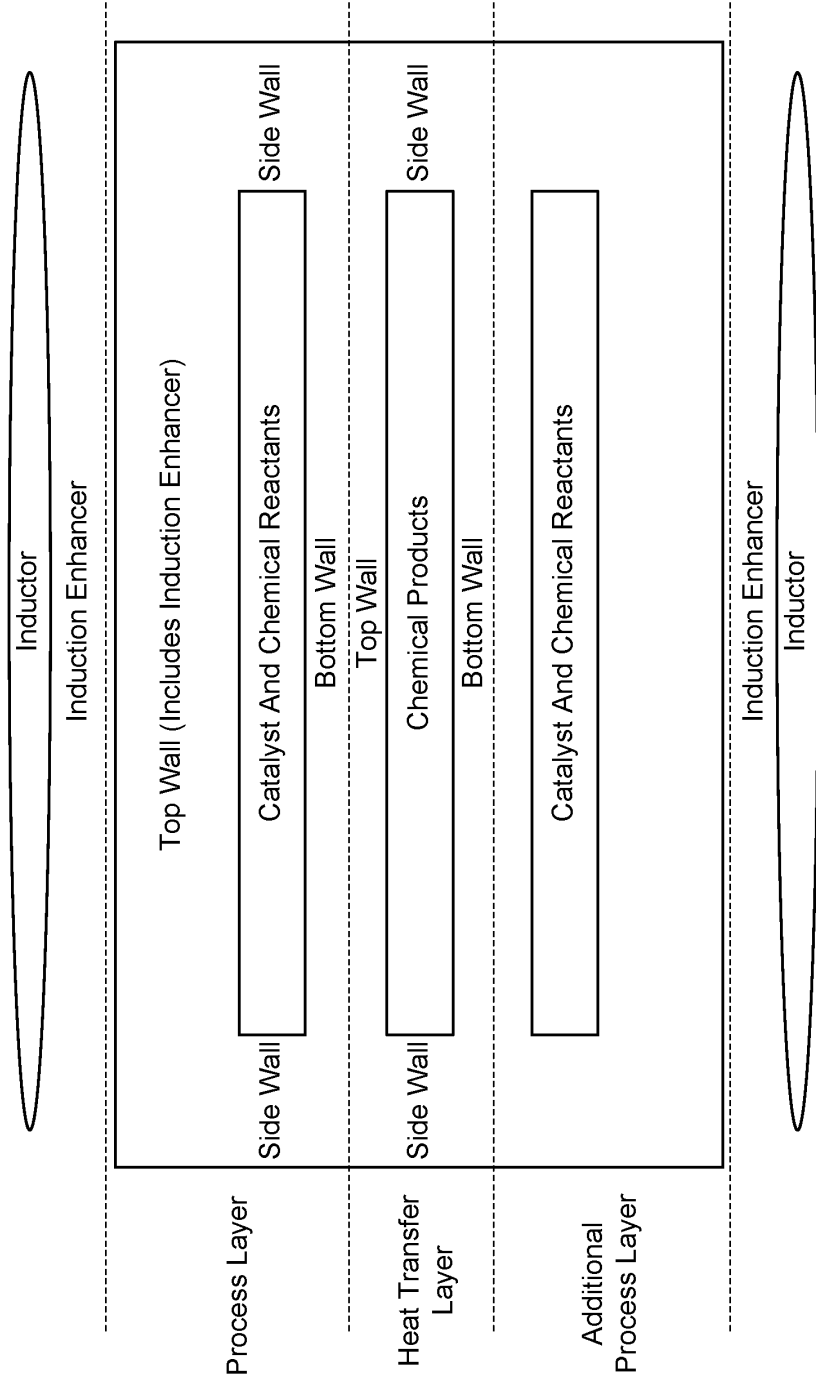


FIG. 12

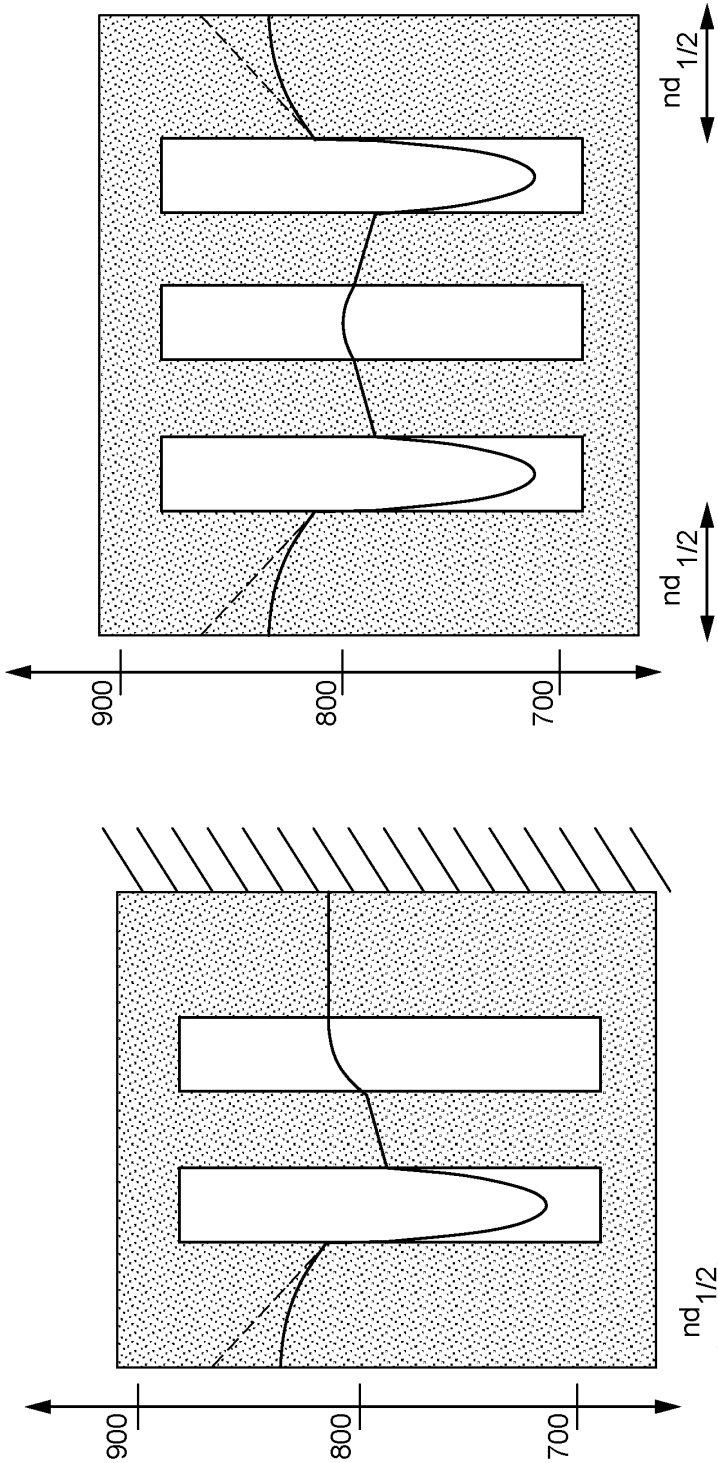

18/25

FIG. 13

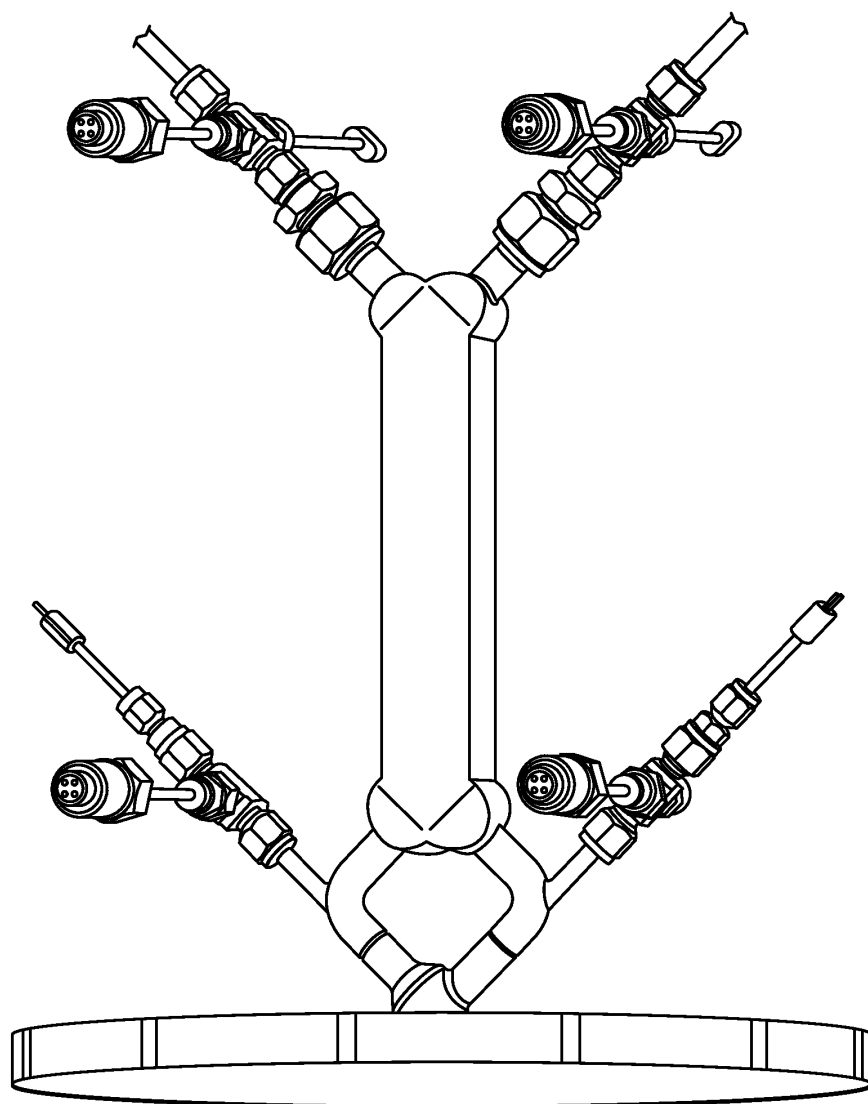

19/25

FIG. 14


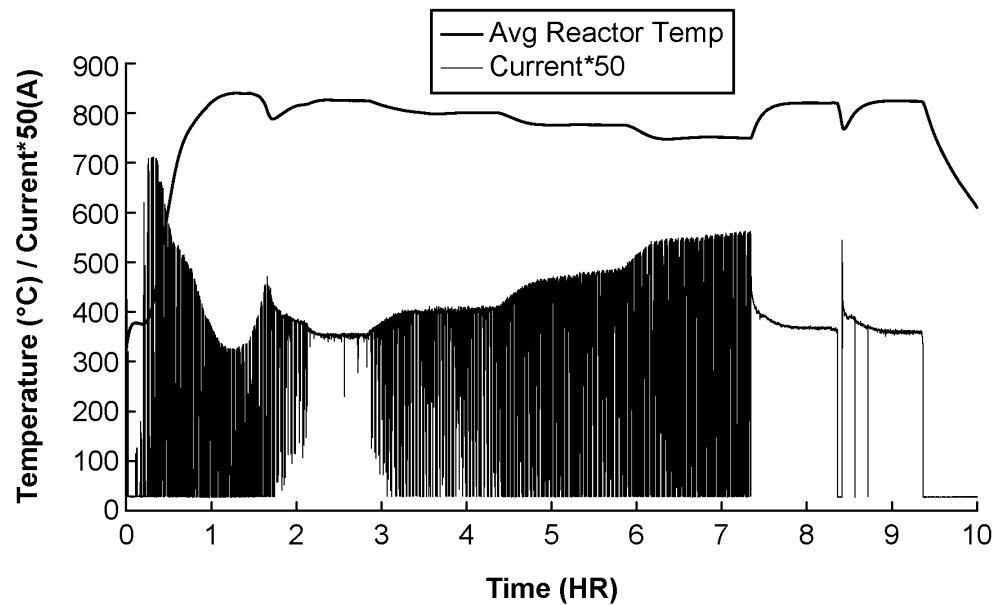


FIG. 15

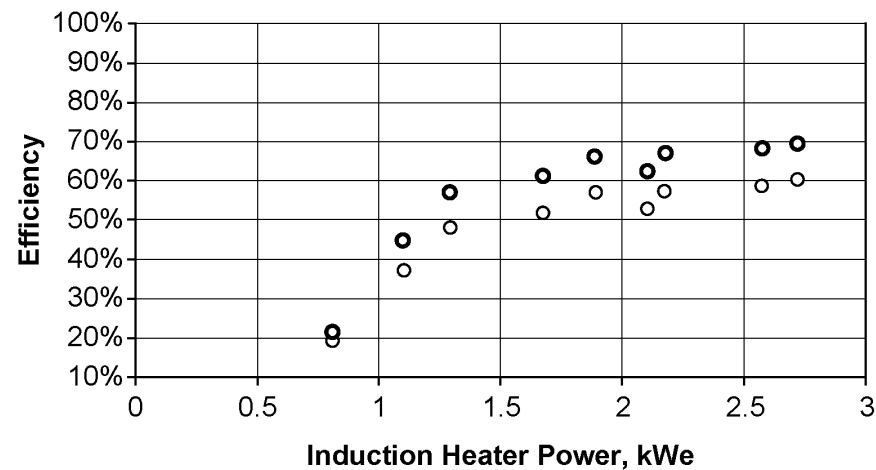

20/25

FIG. 16

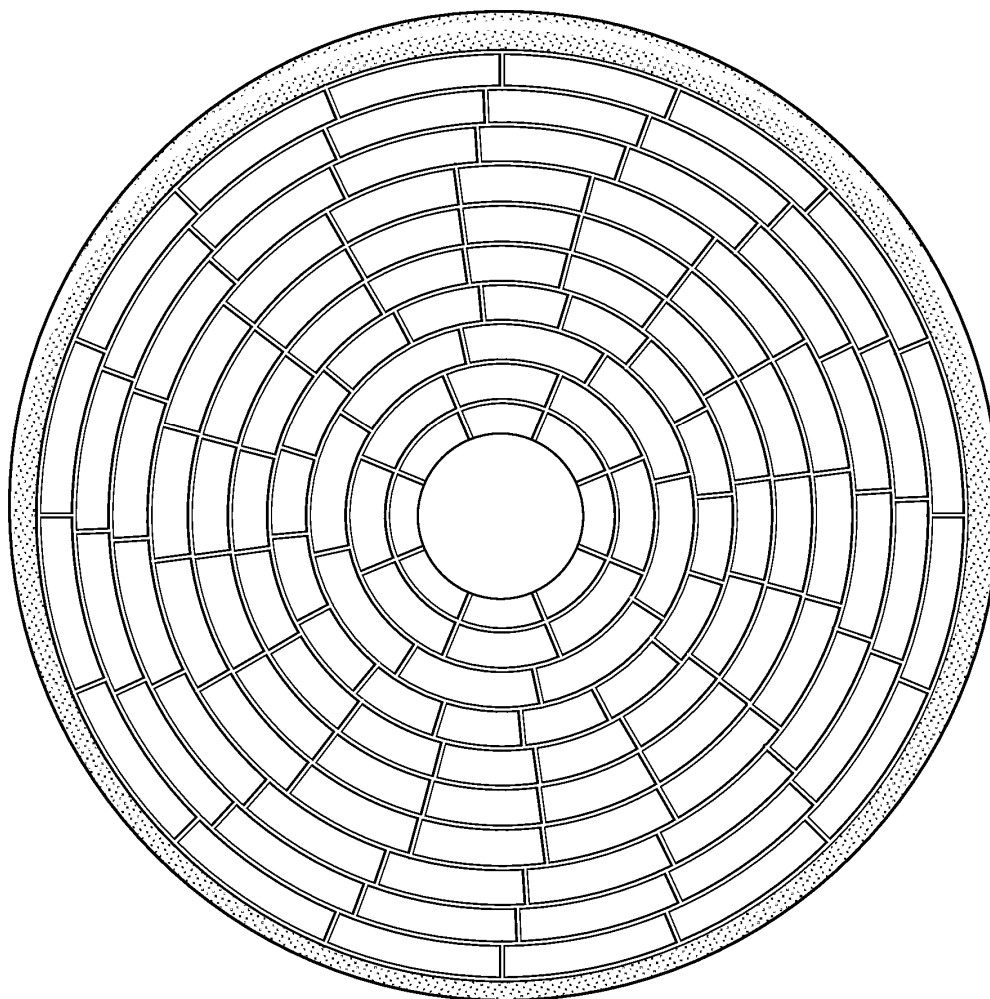


FIG. 17



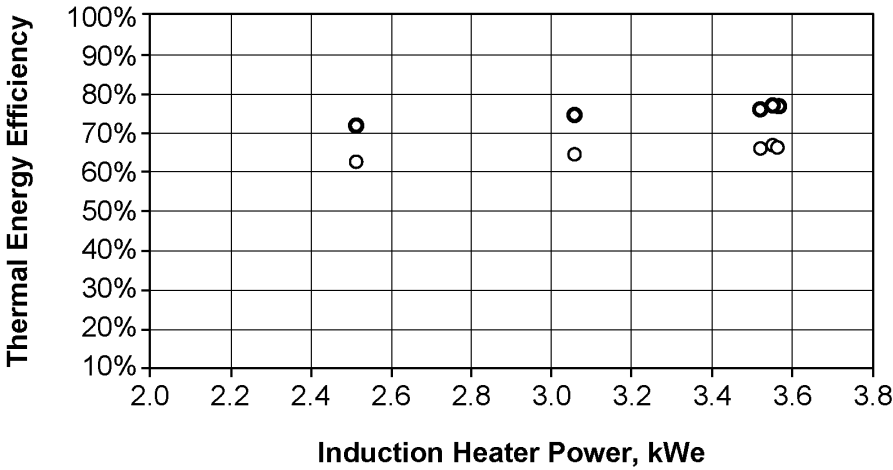


FIG. 18

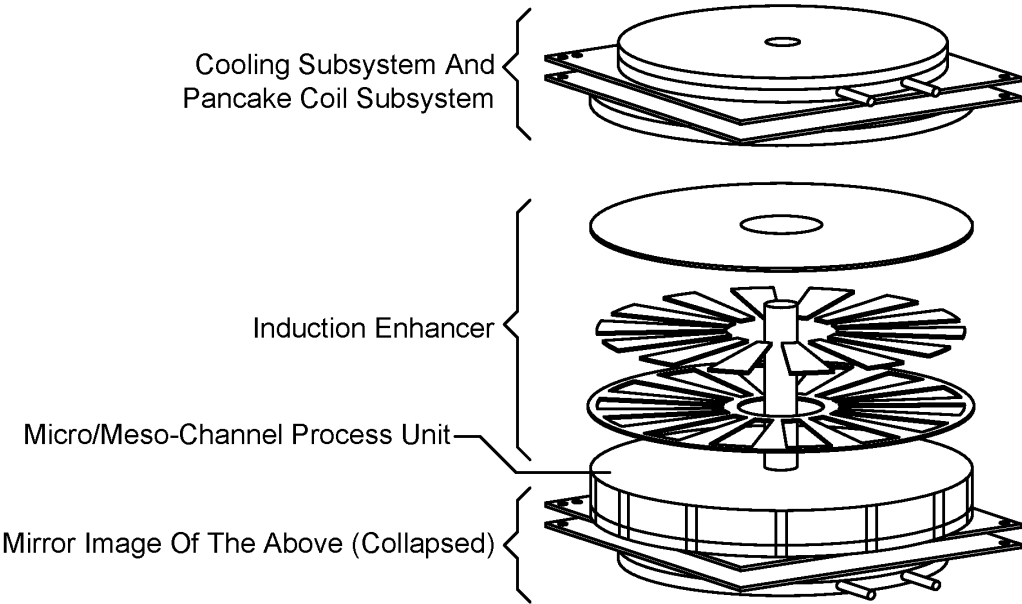

22/25

FIG. 19

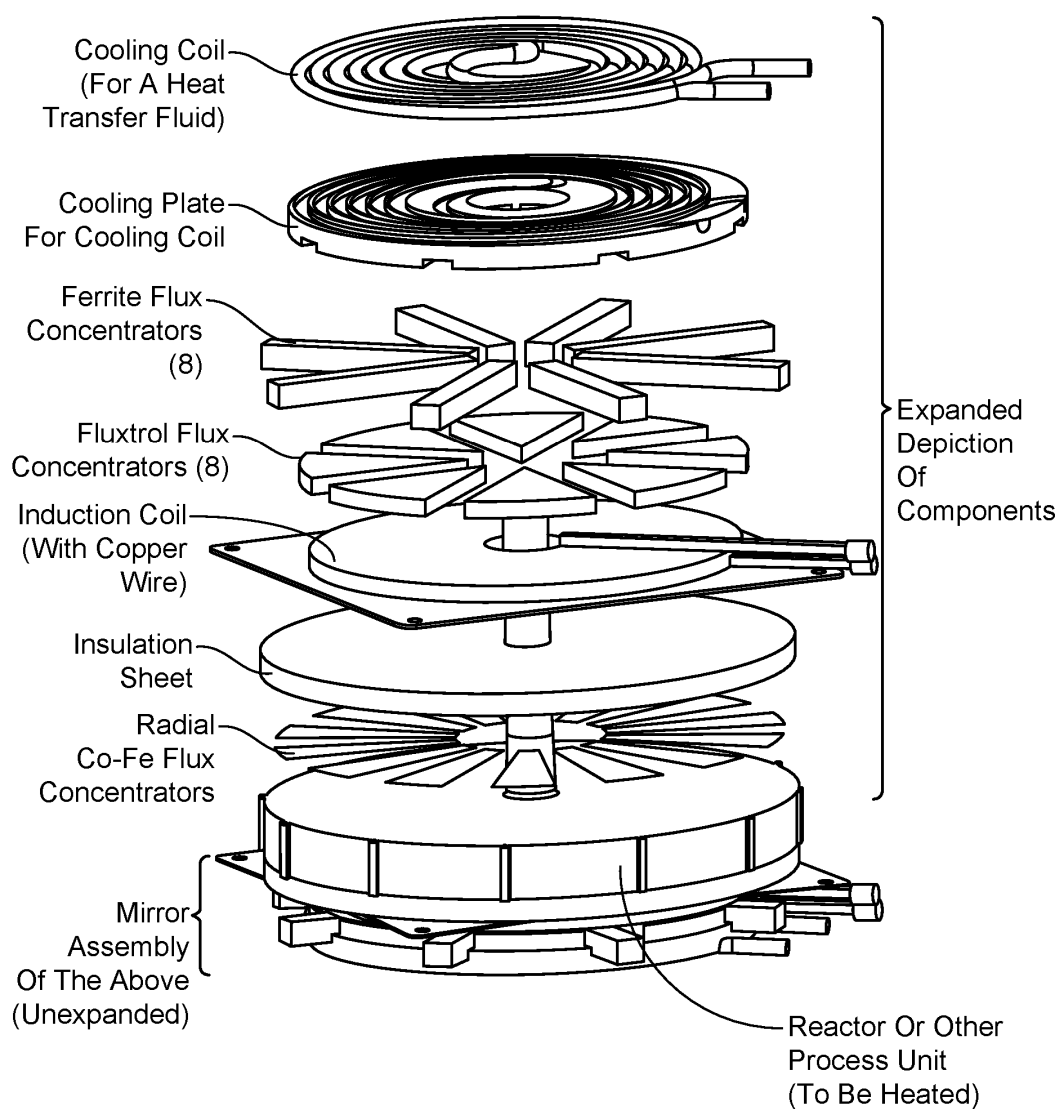

23/25

FIG. 20

SMR Reactor With Nickel-Coated Co/Fe Wedges
Attached To Promote Inductive Coupling To
Commercial Induction Heating System

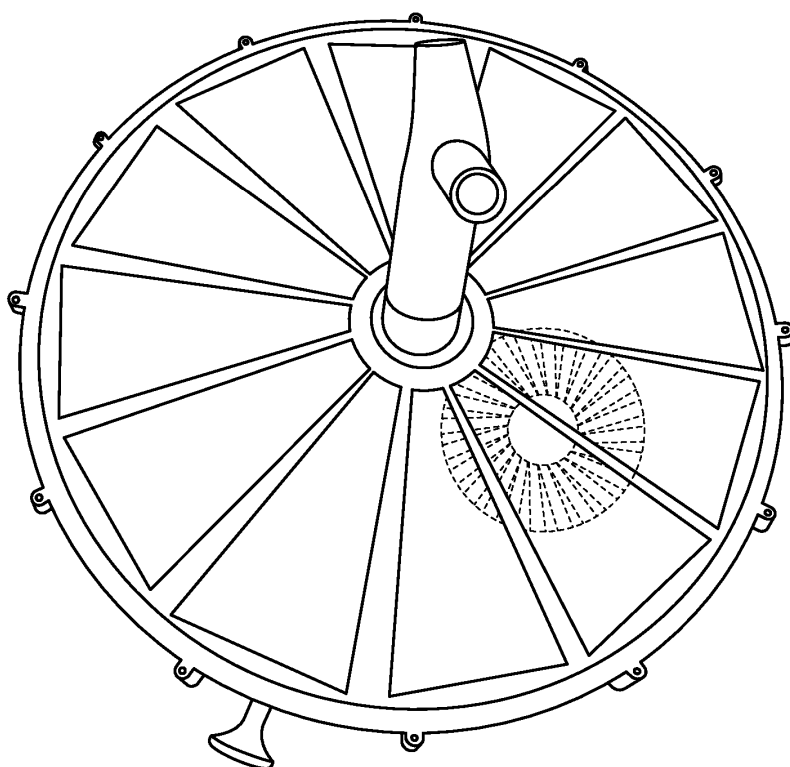


FIG. 21

Results From Testing Of SMR With CoFe Radials

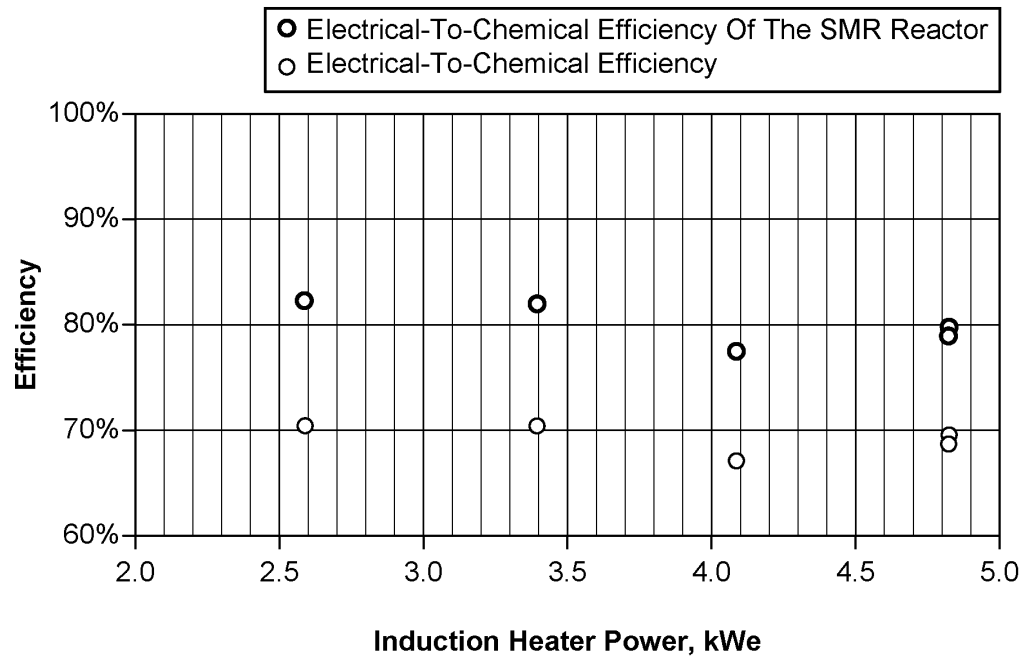


FIG. 22

