

(51) International Patent Classification:
C09D 11/00 (2006.01)(21) International Application Number:
PCT/EP2013/054432(22) International Filing Date:
5 March 2013 (05.03.2013)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
12158219.1 6 March 2012 (06.03.2012) EP(71) Applicant: OCE-TECHNOLOGIES B.V. [NL/NL]; P.O.
Box 101, St. Urbanusweg 43, NL-5914 CA Venlo (NL).(72) Inventors: EVERHARDUS, Roelof H.; Diepstraat 9, NL-
5943 BA Lomm (NL). VERCOULEN, Gerardus C.P.;
Berkenlaan 7, NL-5941 EA Velden (NL). VAN GAGEL-
DONK, Johannes F.J.; Hondsdreef 16, NL-5913 DA
Venlo (NL). LENDERS, Johan P.J.; Beukenlaan 10, NL-
6092 NC Leveroy (NL). VAN ROY, Antonius P.M.M.;
Kapelweg 14, NL-5985 PL Grashoek (NL).(74) Agent: Jetten, M.P.M.; Océ-Technologies B.V., Corpor-
ate Patents, PO Box 101, NL-5900 MA Venlo (NL).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INK COMPOSITION

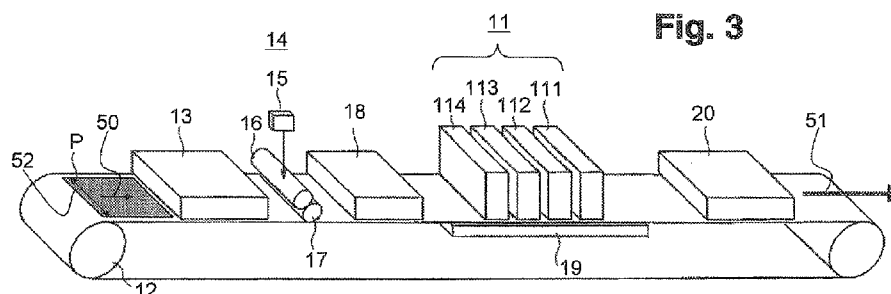

(57) Abstract: The present invention relates to an ink composition suitable for being ejected from an inkjet marking device at an operating temperature. The ink composition comprises a water-dispersible resin and has a dynamic surface tension of below 35 mN/m and a static surface tension of above 21 mN/m both determined at the operating temperature. The ink composition may comprise a mixture of water-soluble organic solvents having a difference in the relative dielectric constant of more than 5, preferably between 10 and 50. The ink composition may comprise a polymeric cosolvent, in particular a polyethylene glycol or polyethylene glycol (di)methyl ether. The ink composition may comprise a mixture of surfactants comprising at least one surfactant of a first type selected from the group consisting of acetylene glycols and ethoxylated acetylene glycols and at least one surfactant of a second type selected from the group consisting of silicone surfactants and fluorochemical surfactants.