

FIG. 1

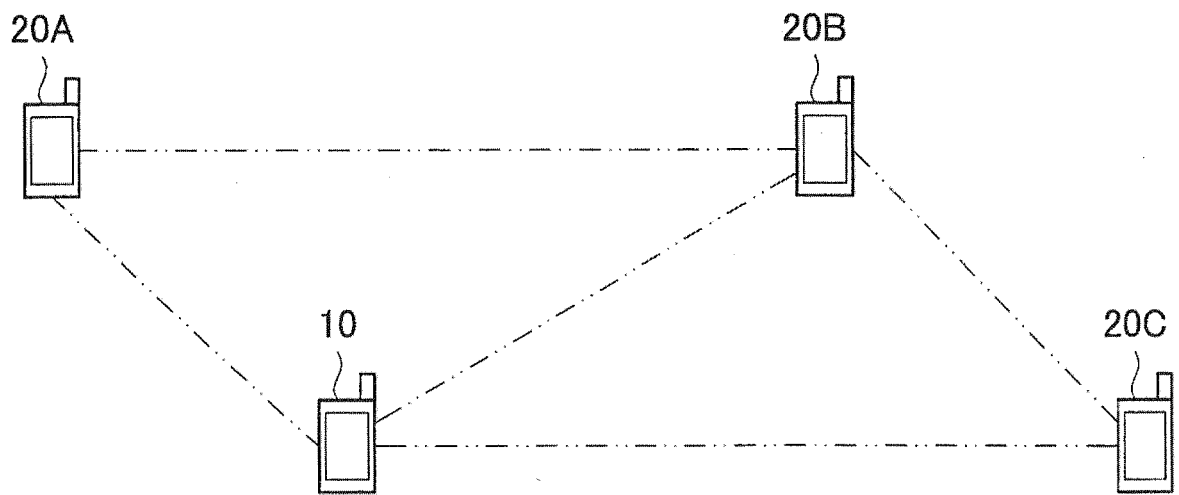


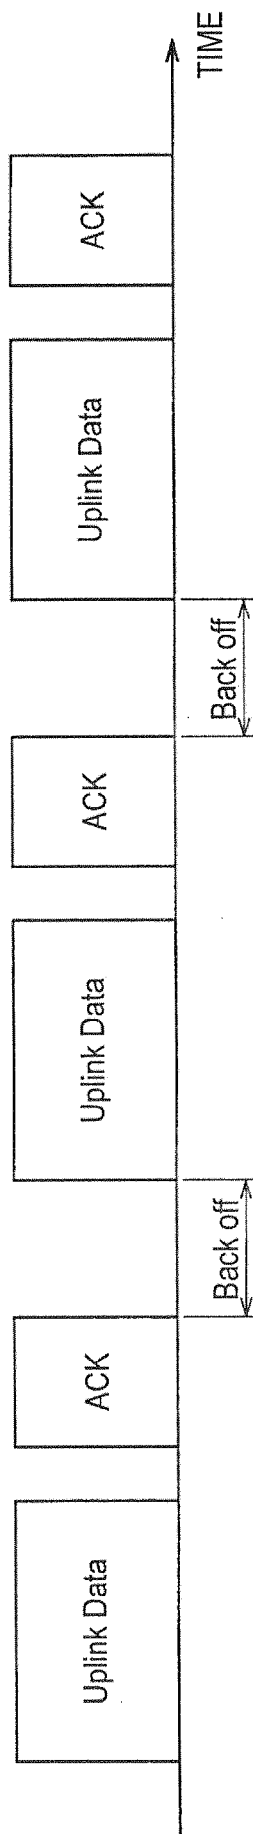
FIG. 2

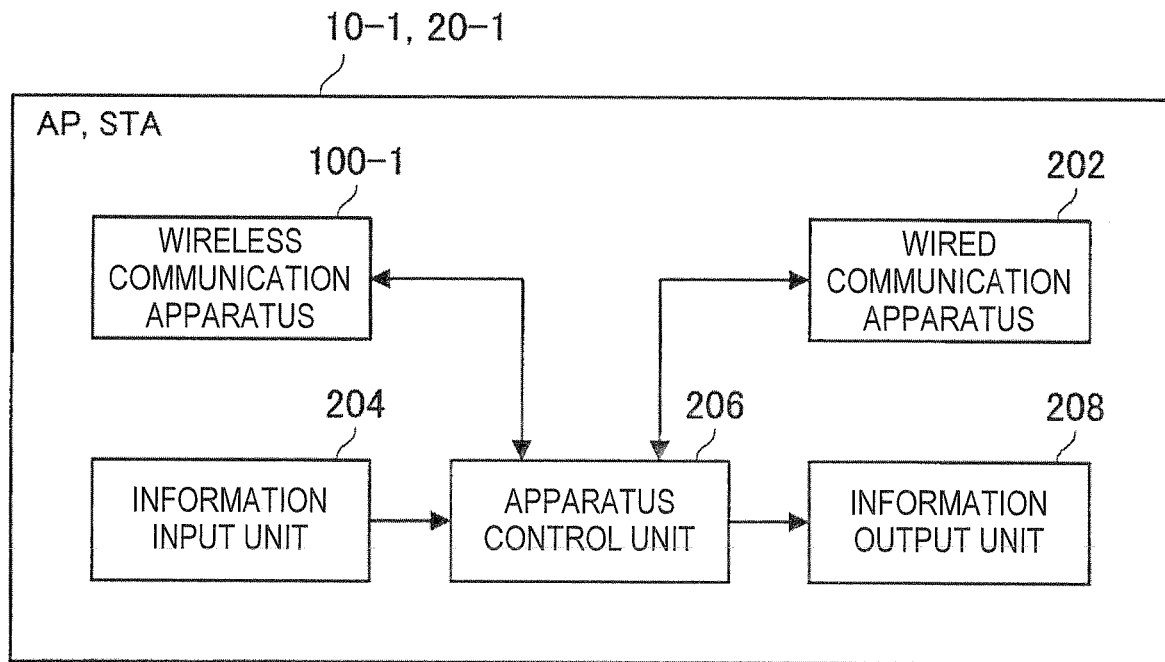
FIG. 3

FIG. 4

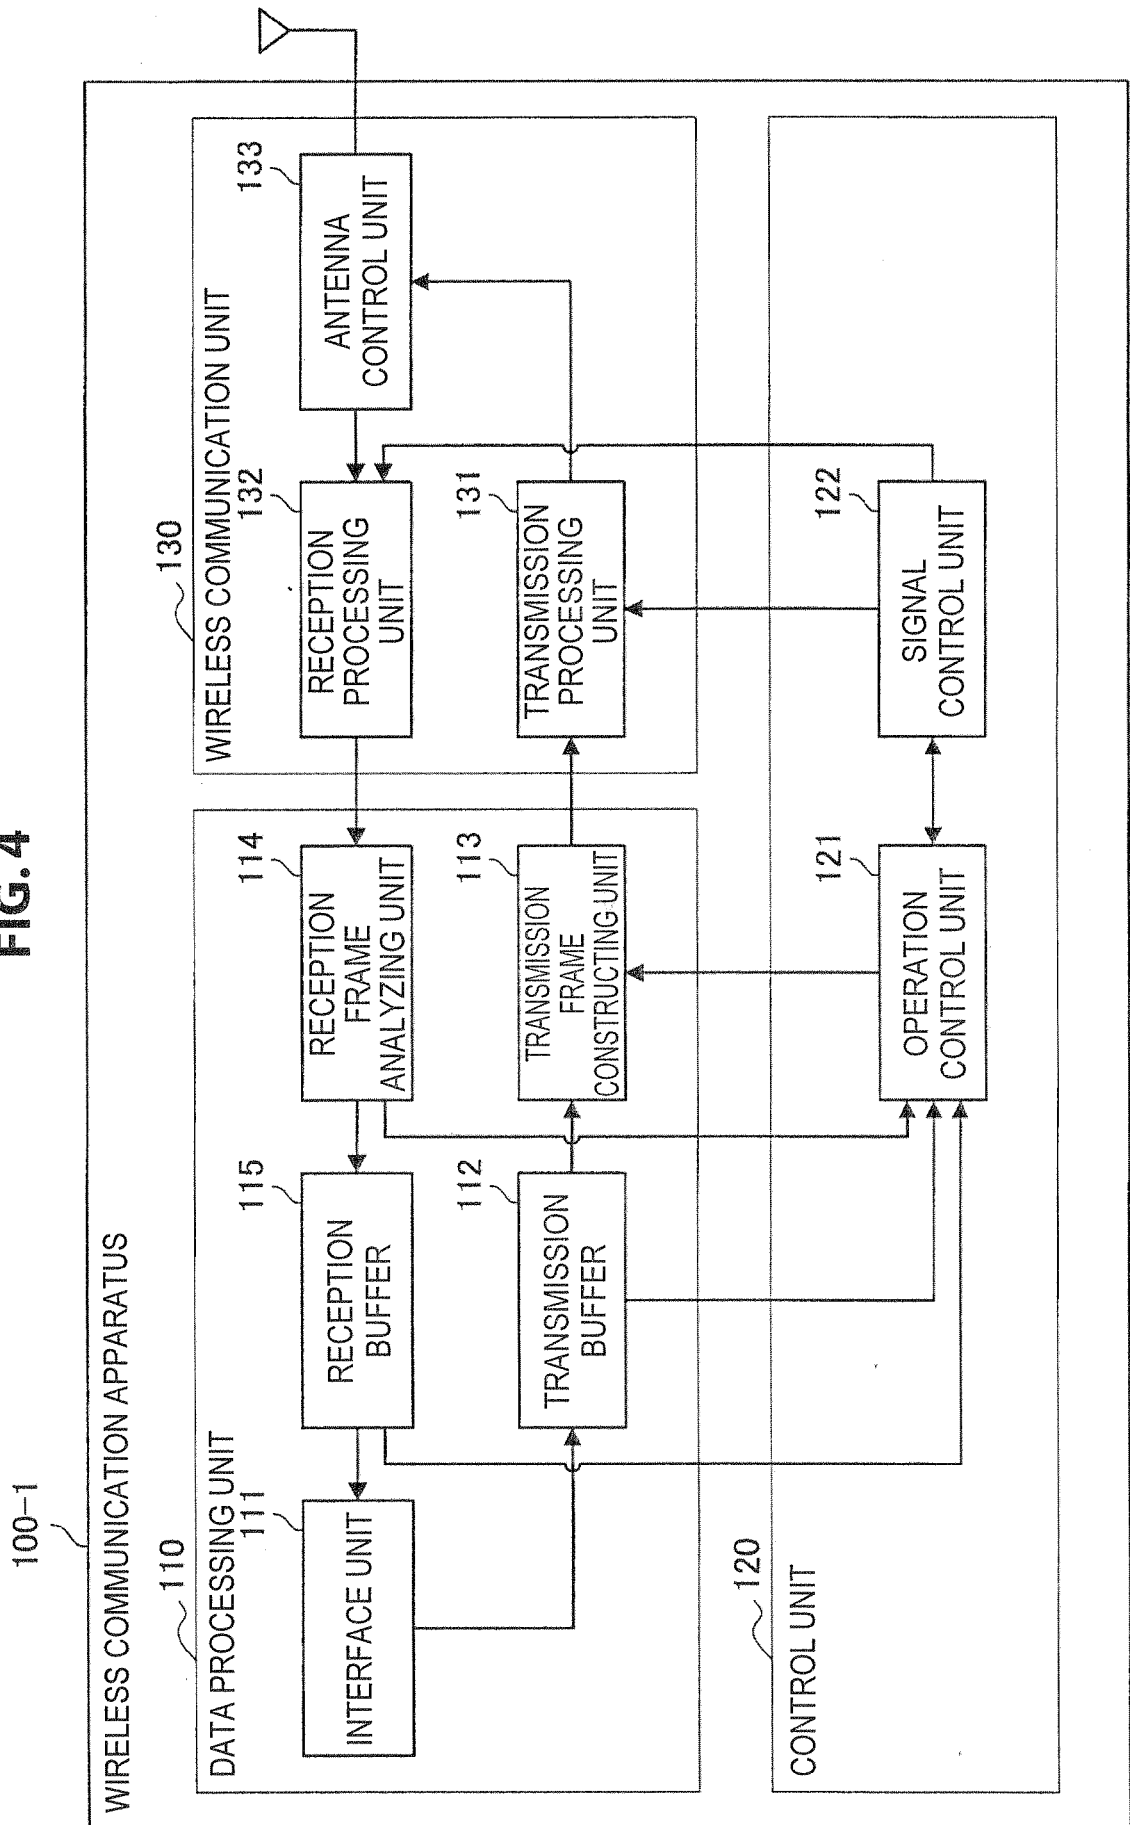


FIG. 5

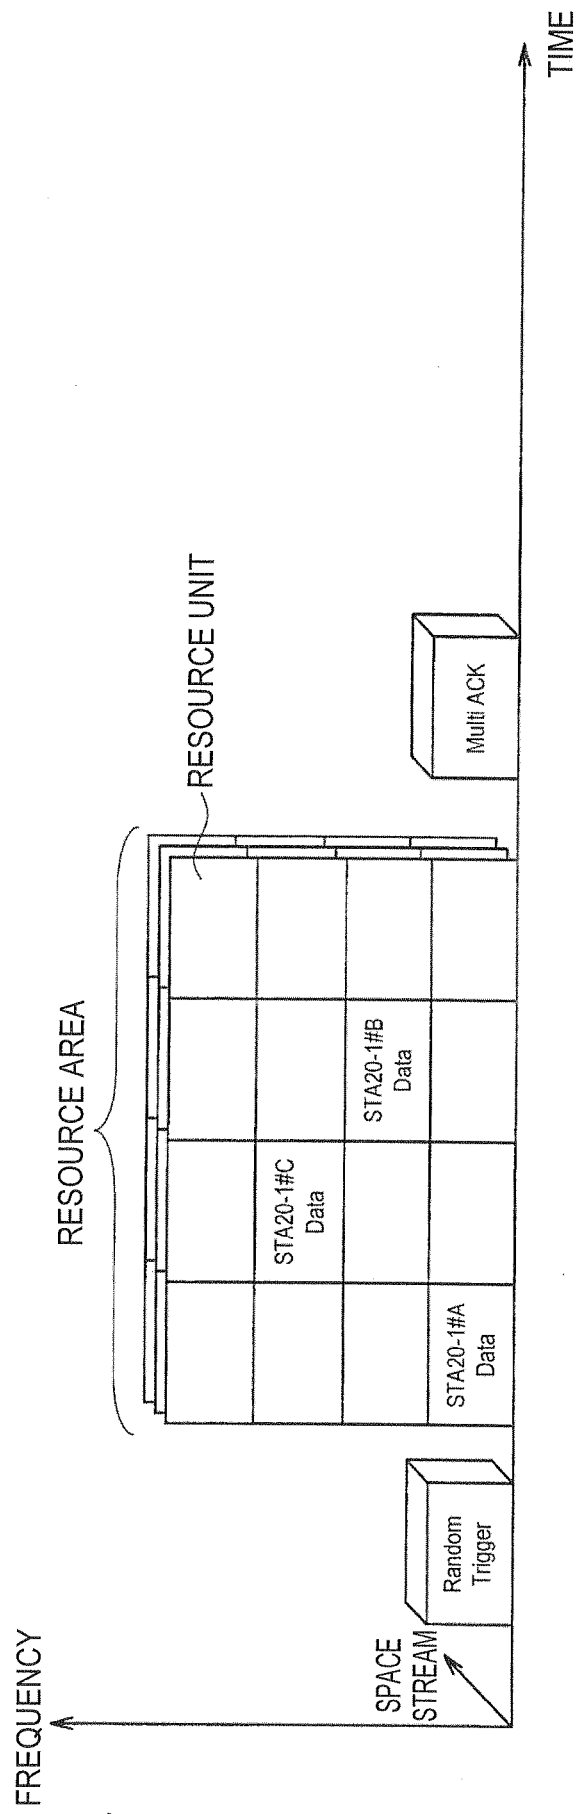


FIG. 6

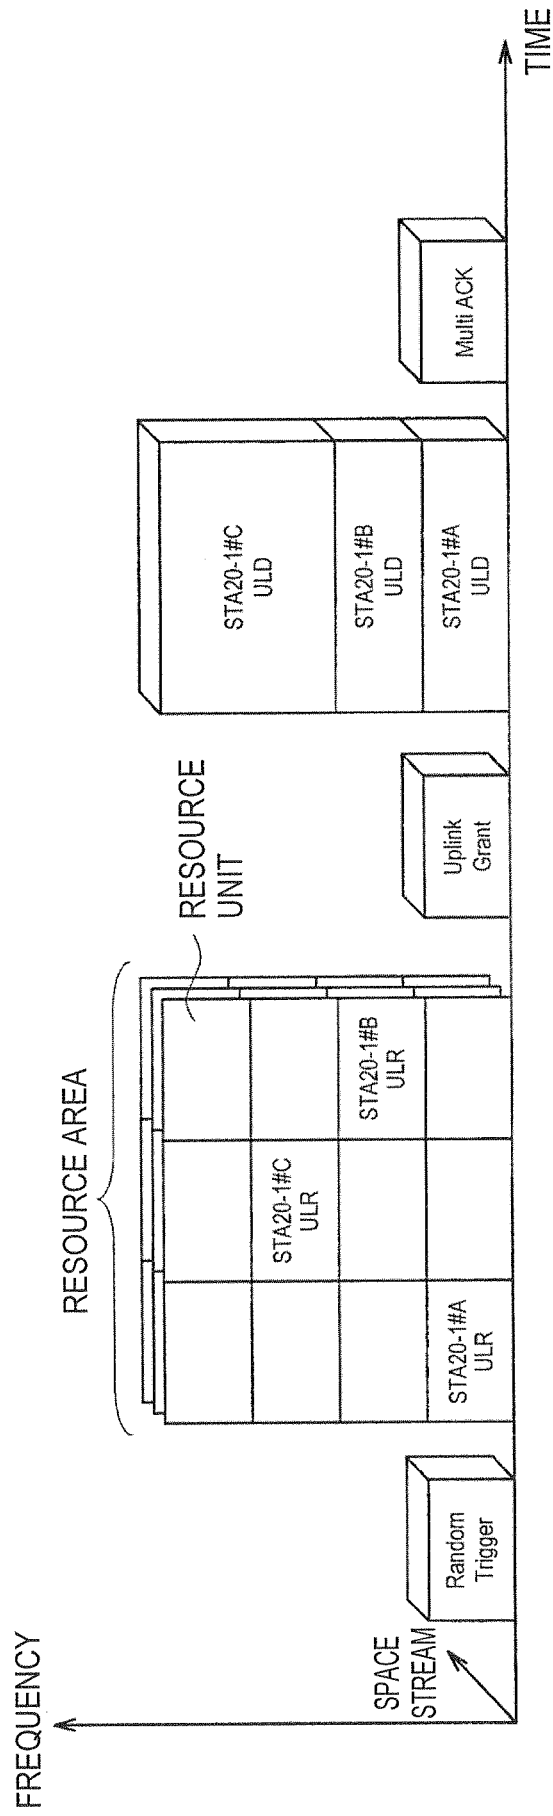


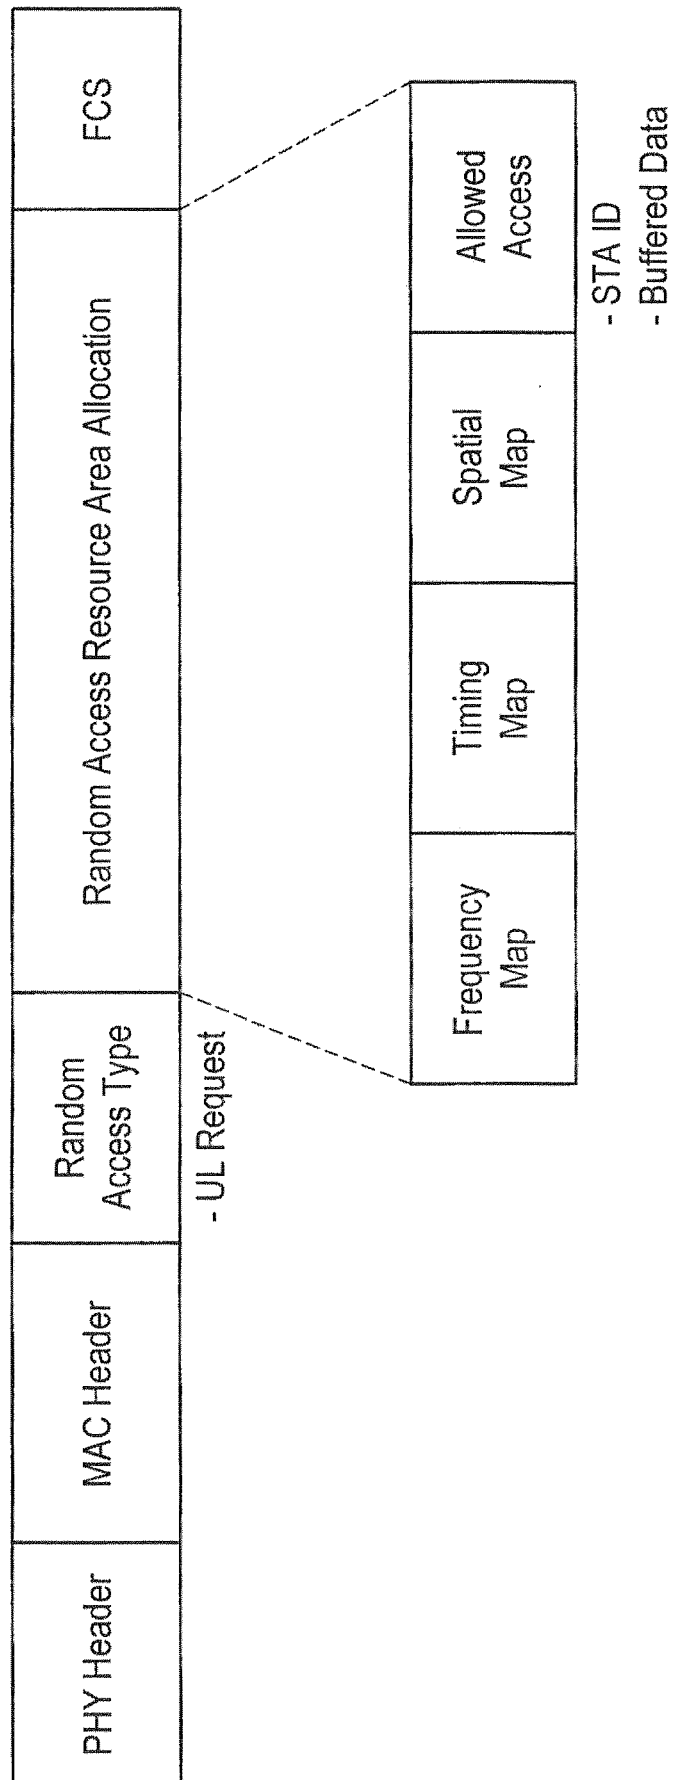
FIG. 7

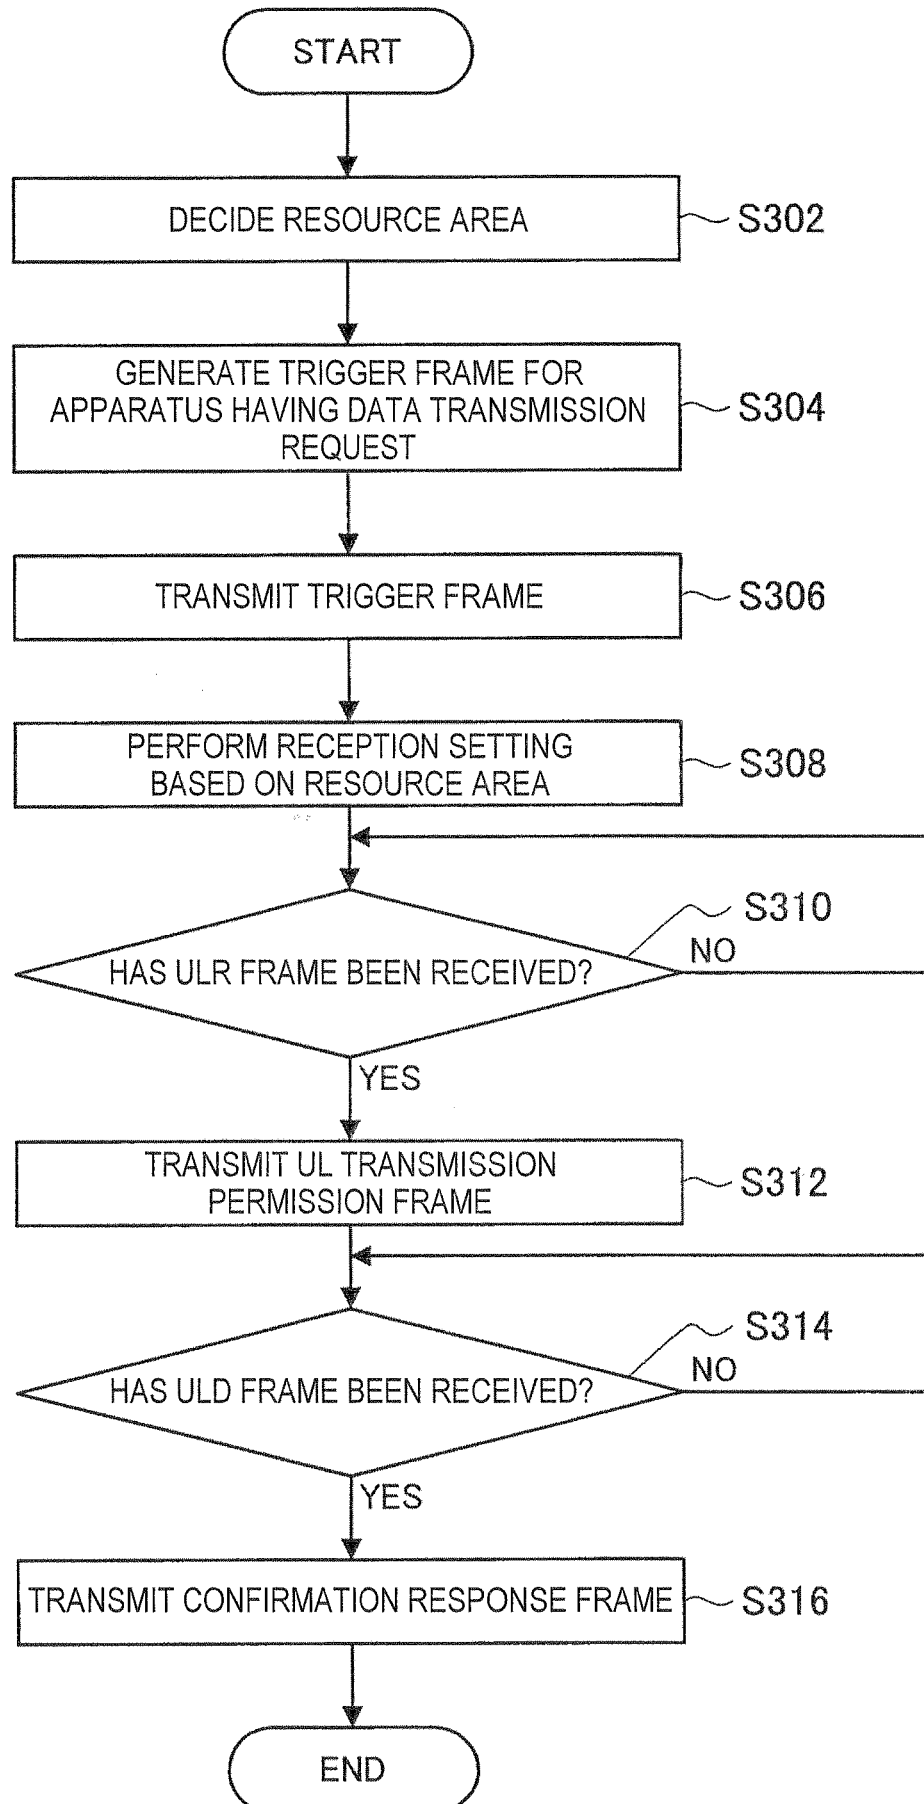
FIG. 8

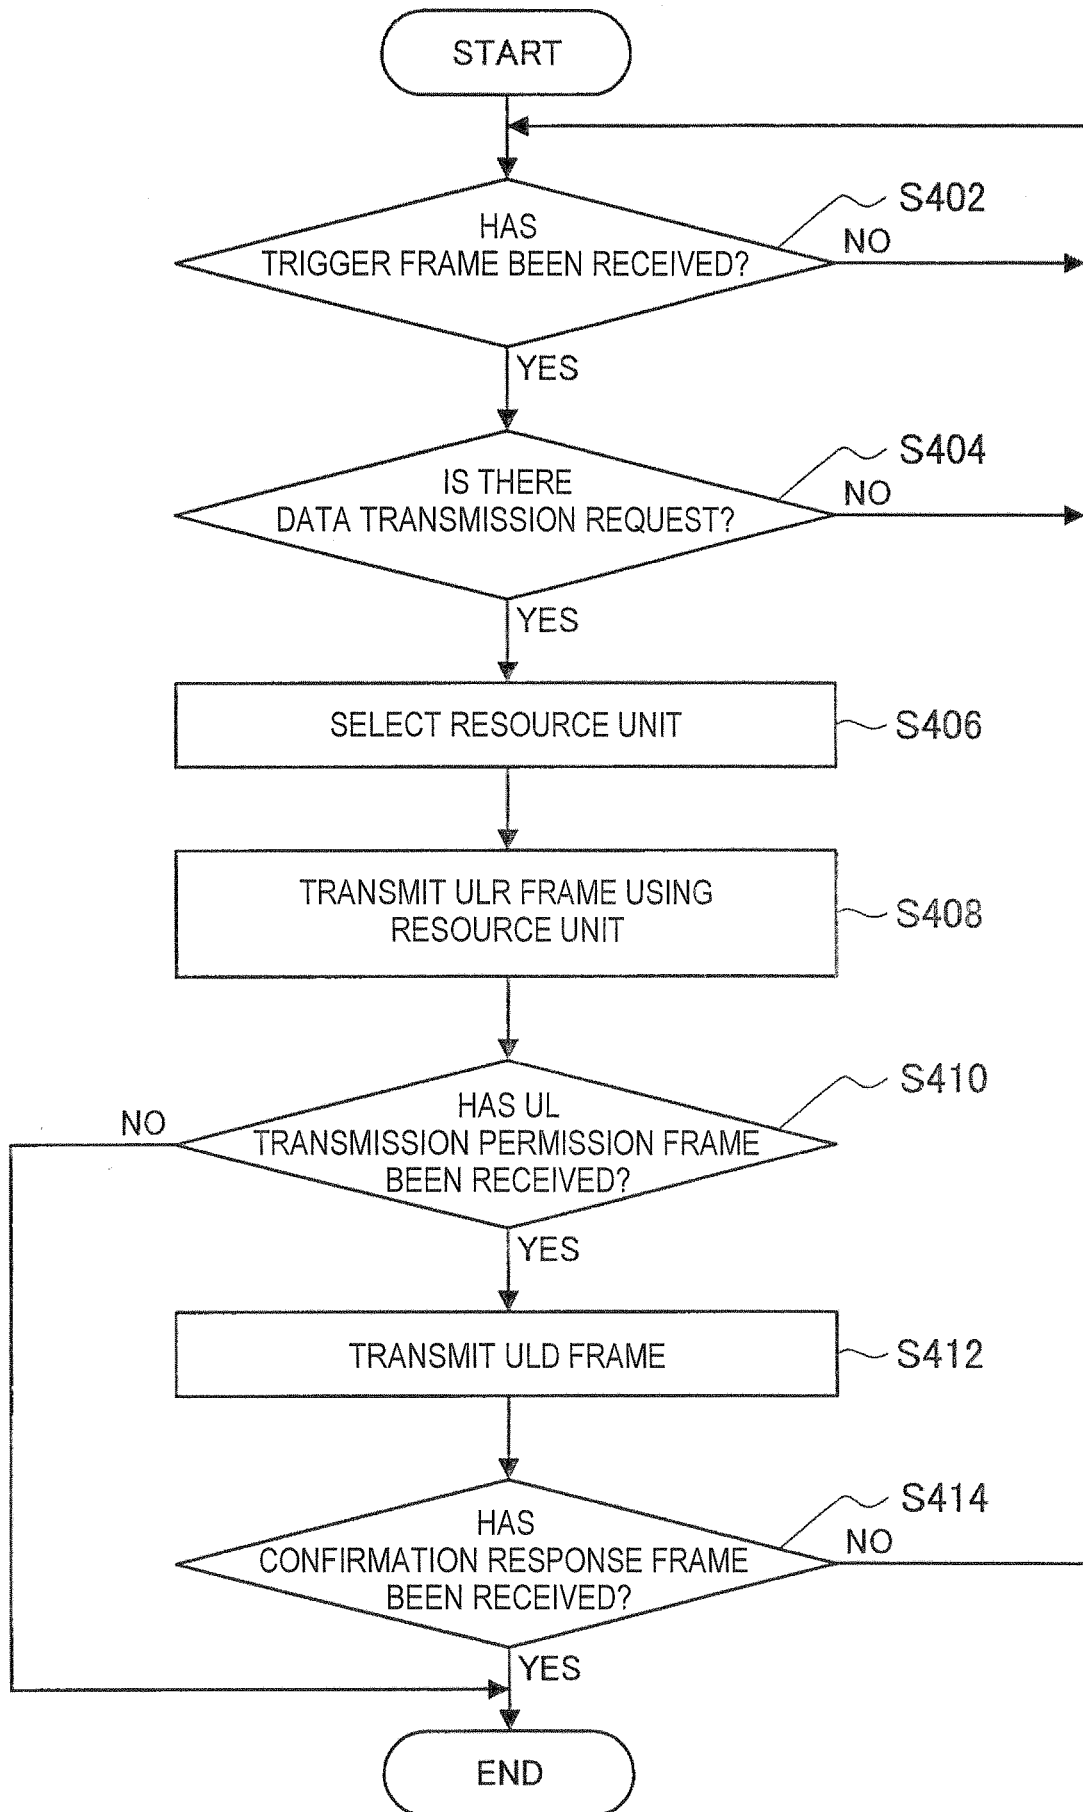
FIG. 9

FIG. 10

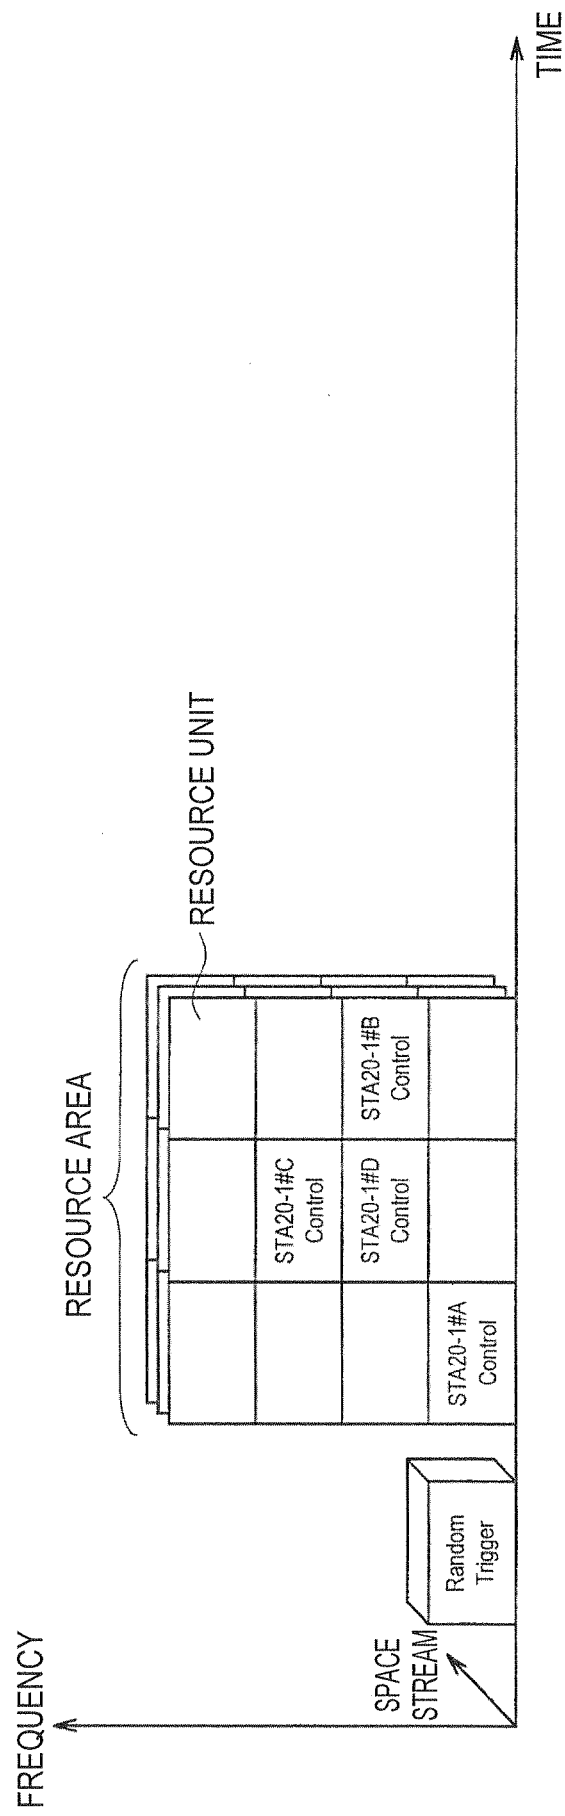


FIG. 11

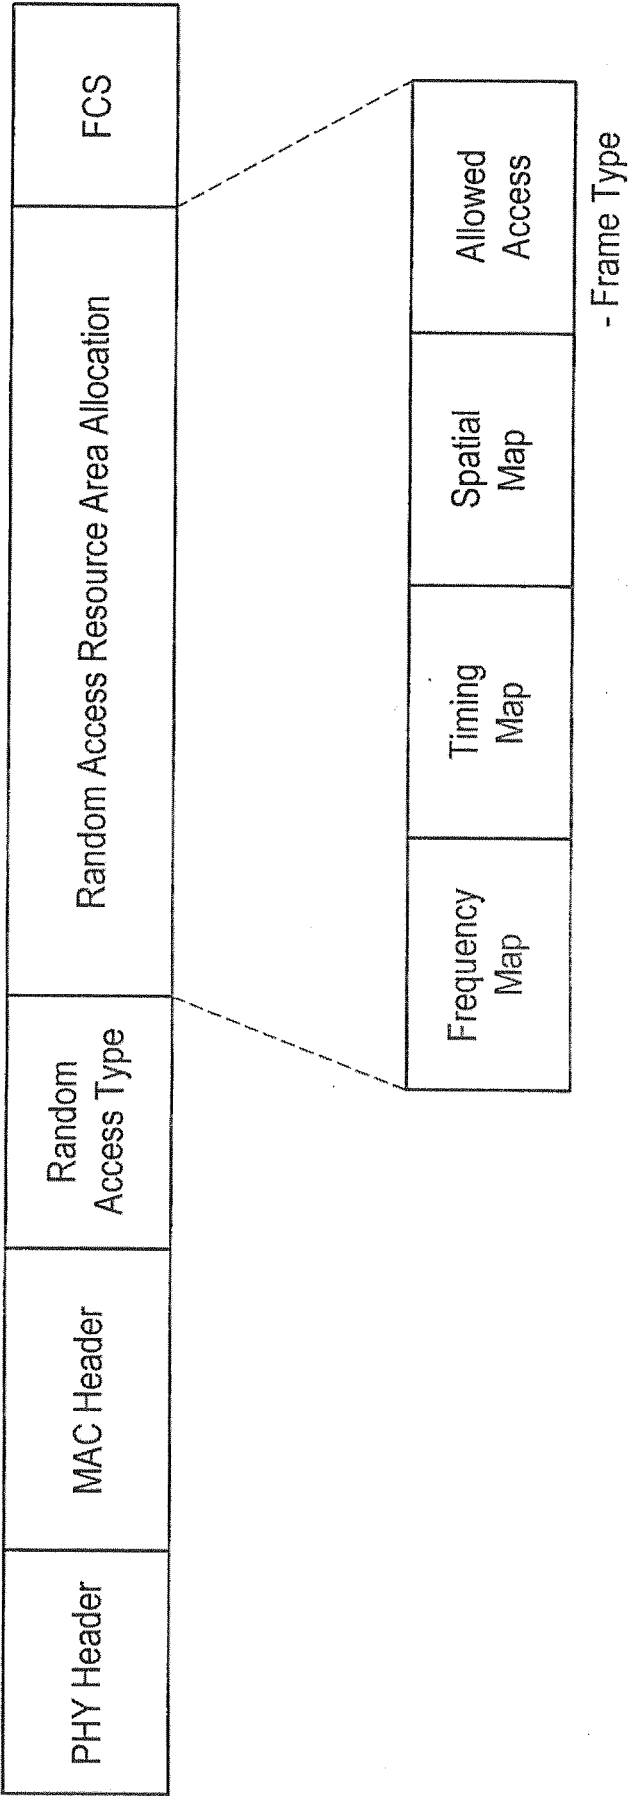


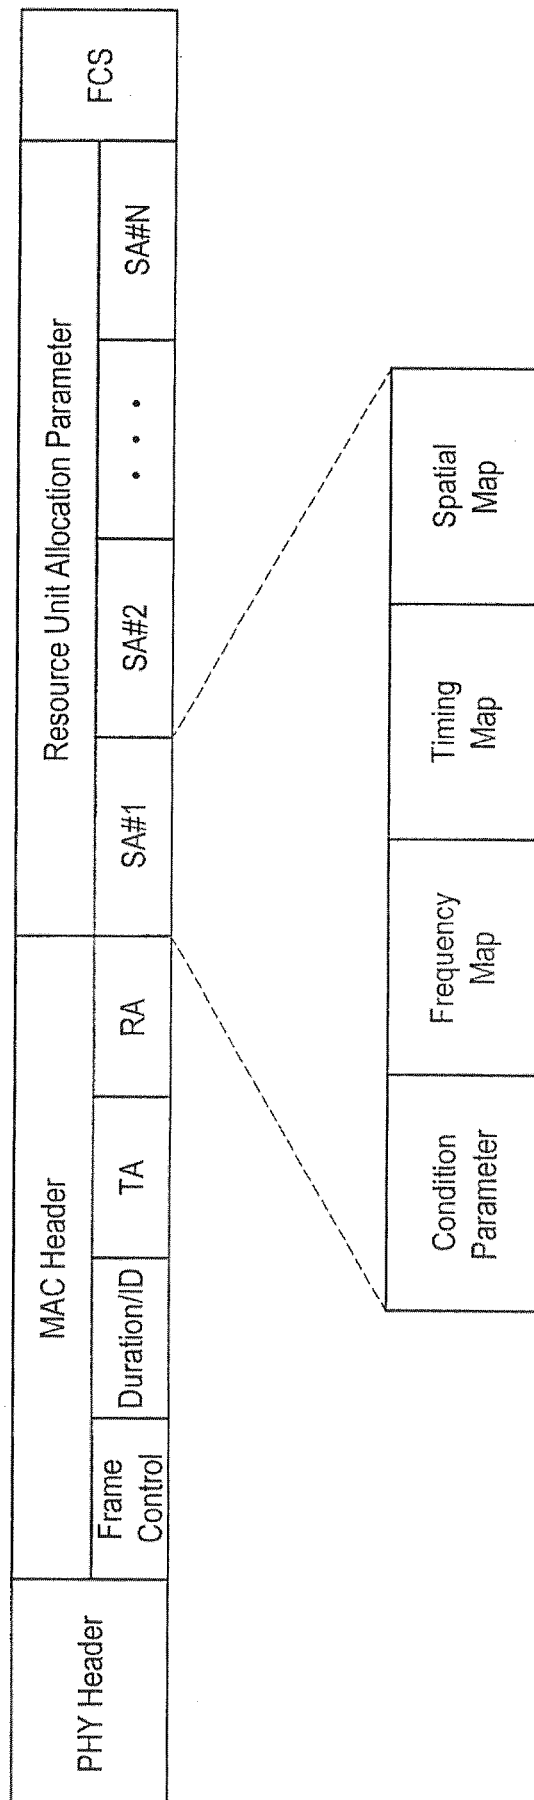
FIG. 13

FIG. 14

Parameter	Condition
0x00	Reserved
0x01	Frame Type : Probe Request
0x02	Frame Type : Power Save Polling
0x03	Frame Type : Other Control Frame
0x04	Frame Type : Data Frame
0x05-0x08	Reserved
0x09	Buffered Data Length : 1-127 Octets
0x0A	Buffered Data Length : 128-1023 Octets
0x0B	Buffered Data Length : 1K-1M Octets
0x0C	Buffered Data Length : LARGER THAN 1M OCTETS
0x0D-0x0F	Reserved
0x10	Receive Signal Strength : WEAK
0x11	Receive Signal Strength : STRONG
0x12-0x1F	Reserved
0x20	MCS(Modulation and Coding Scheme) : BPSK / QPSK
0x21	MCS(Modulation and Coding Scheme) : 16QAM / 64 QAM
0x22	MCS(Modulation and Coding Scheme) : 256QAM
0x23-0x3F	Reserved
0x40-0xFF	Reserved

FIG. 15A

Bit	Channel ID
0	Channel 36
1	Channel 40
2	Channel 44
3	Channel 48
4	Channel 52
5	Channel 56
6	Channel 60
7	Channel 62

FIG. 15B

Bit	IFS
0	SIFS×2
1	SIFS×4
2	SIFS×6
3	SIFS×8
4	SIFS×10
5	SIFS×12
6	SIFS×14
7	SIFS×16

FIG. 15C

Bit	Stream Index
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7

FIG. 16

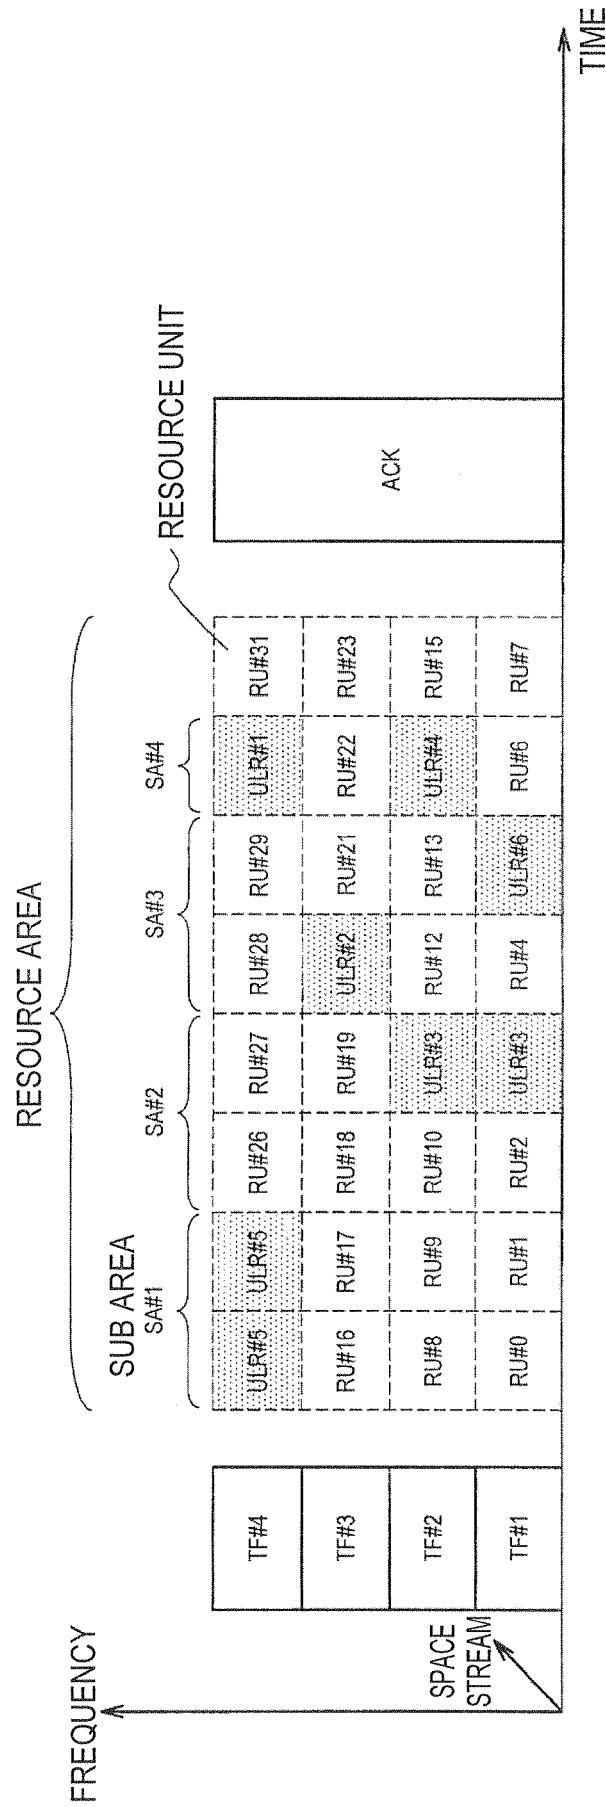


FIG.17

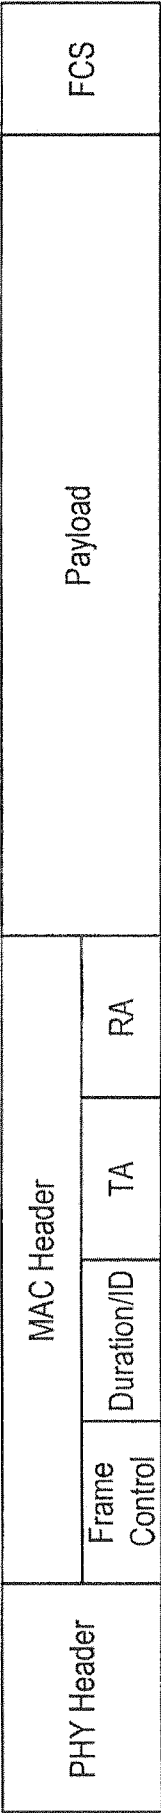


FIG. 18

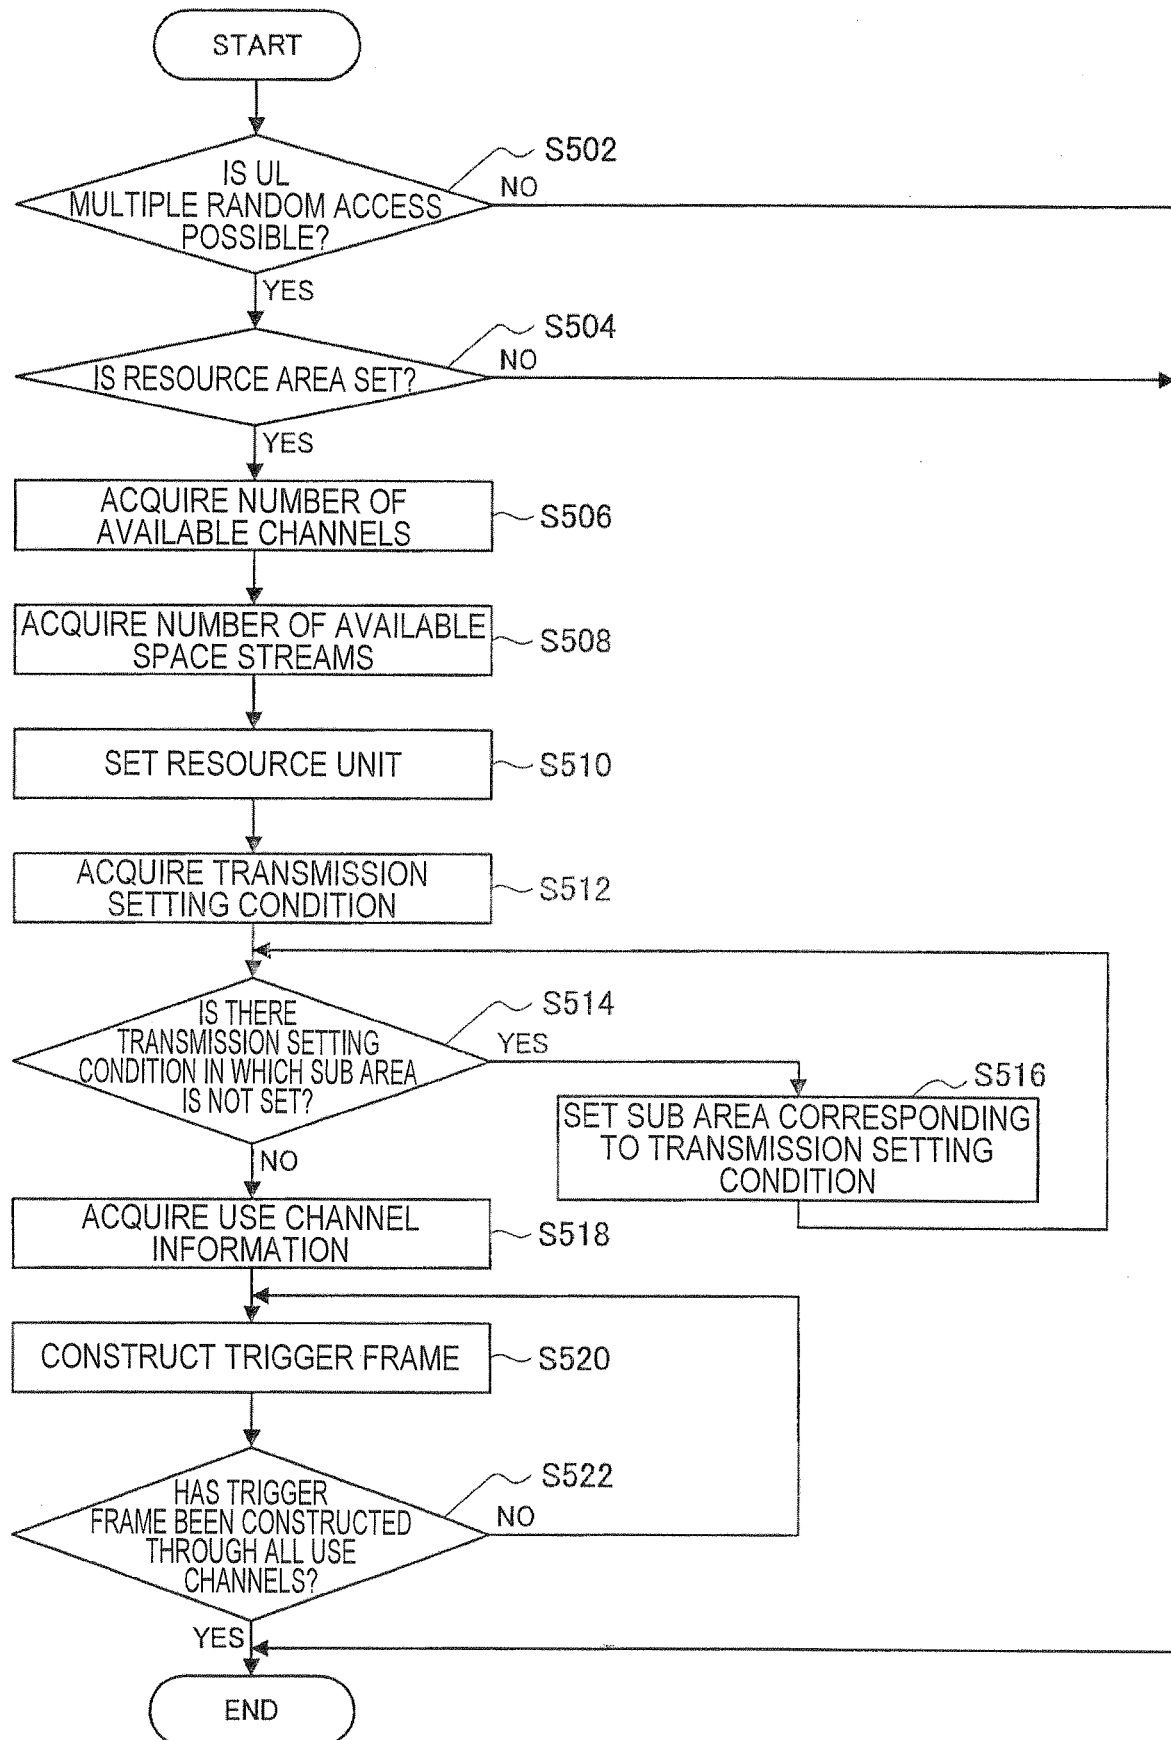


FIG. 19

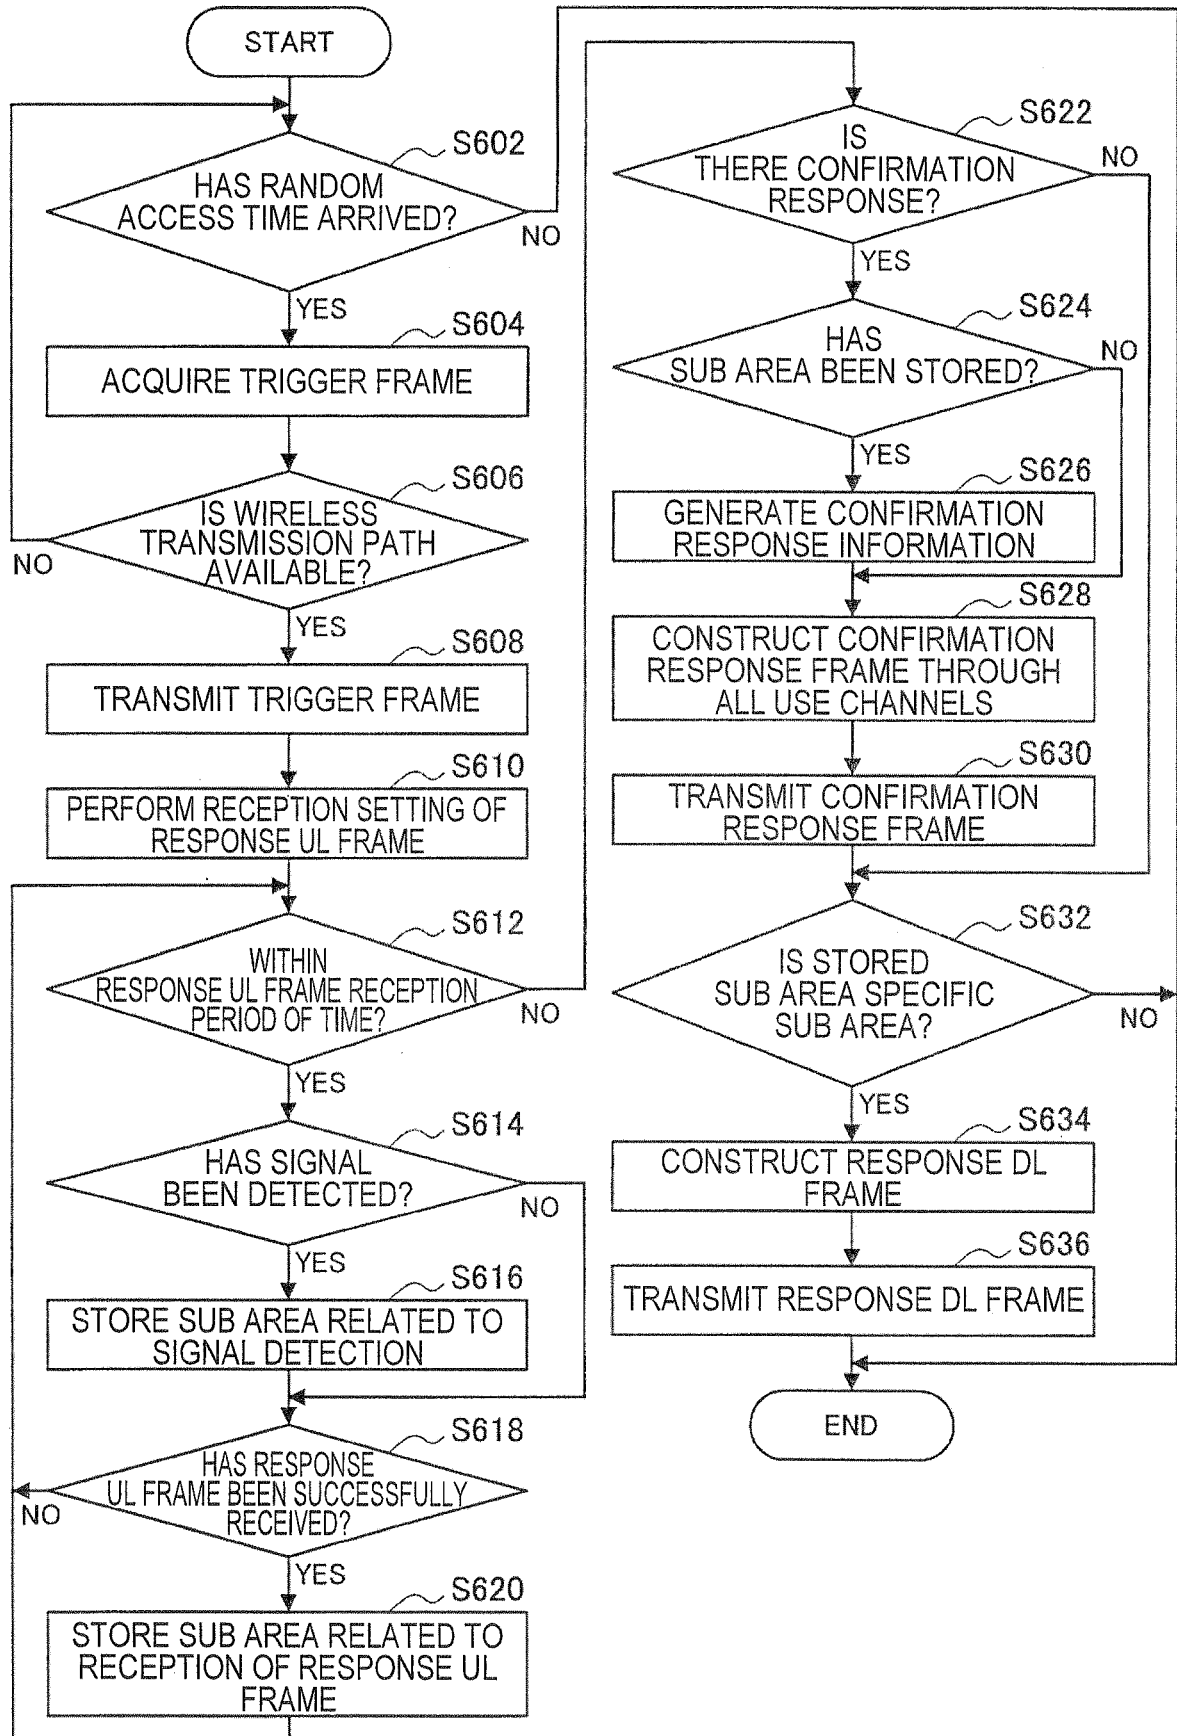


FIG. 20

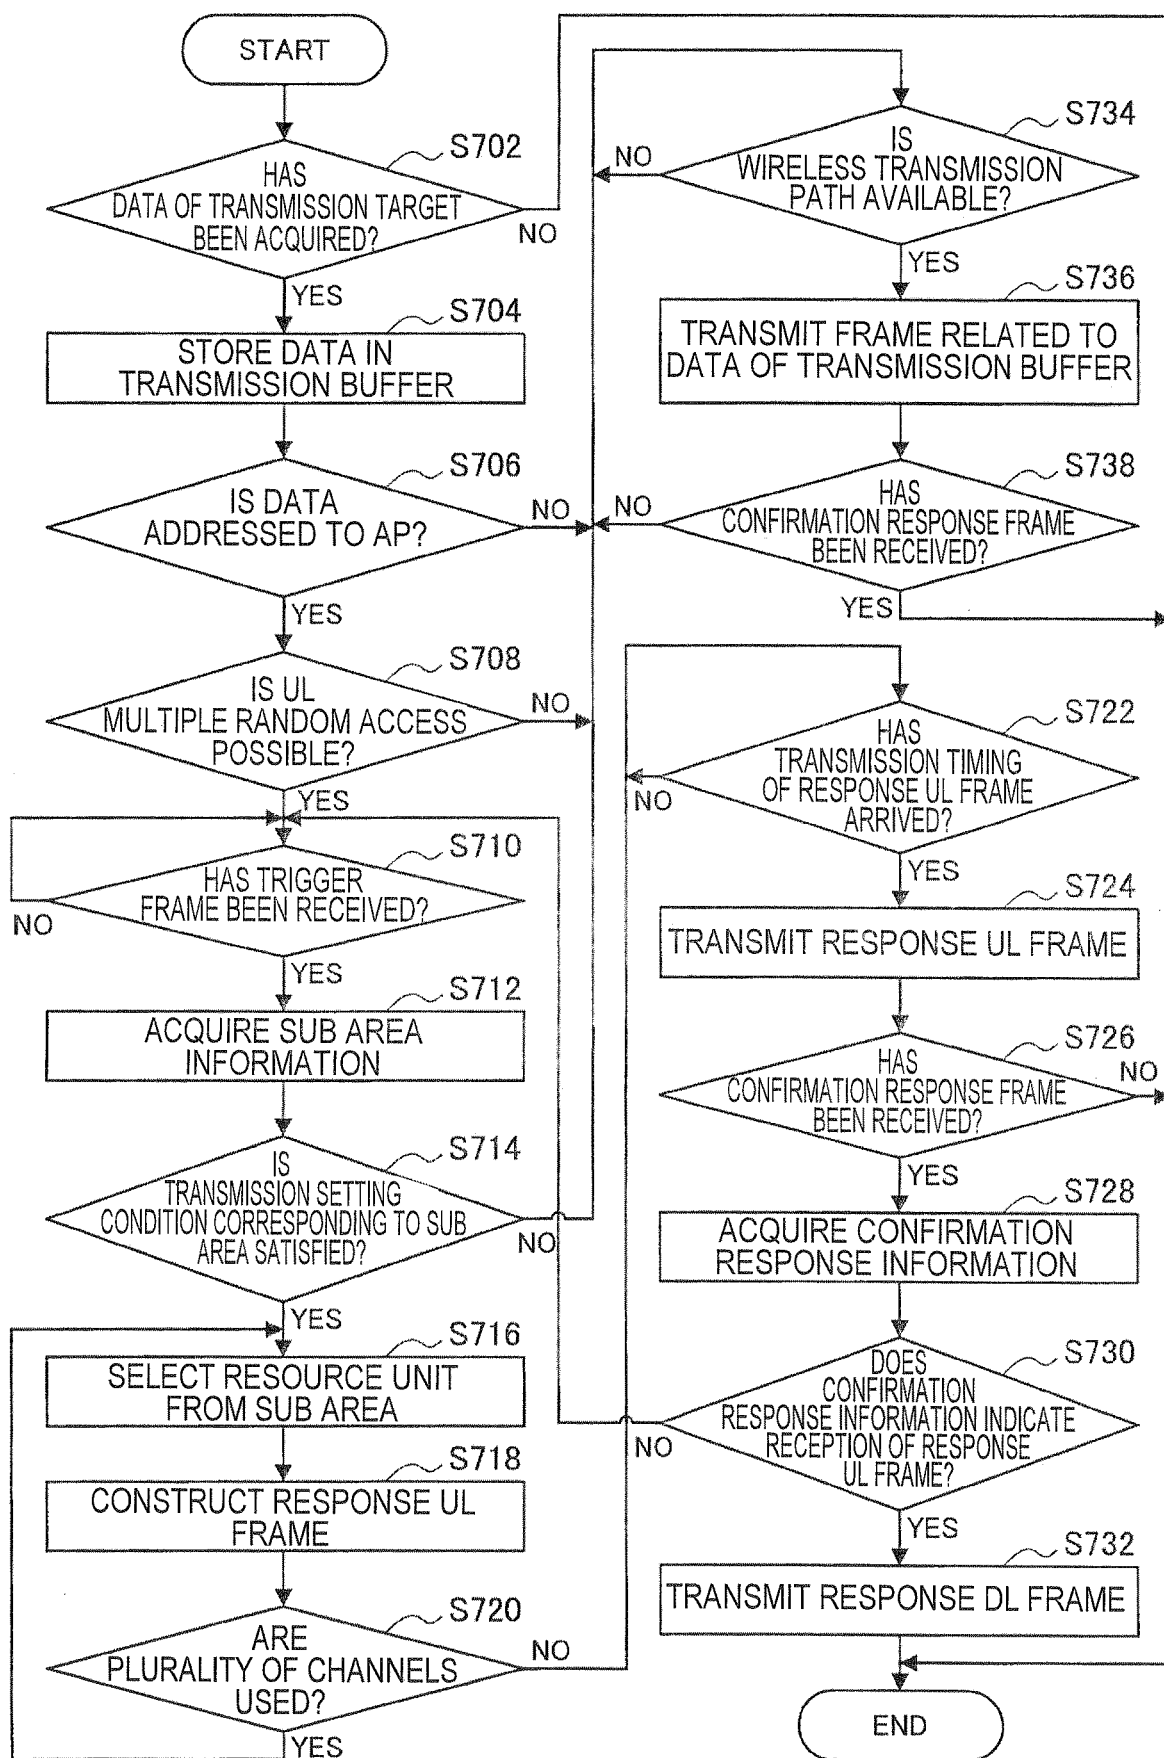


FIG. 21

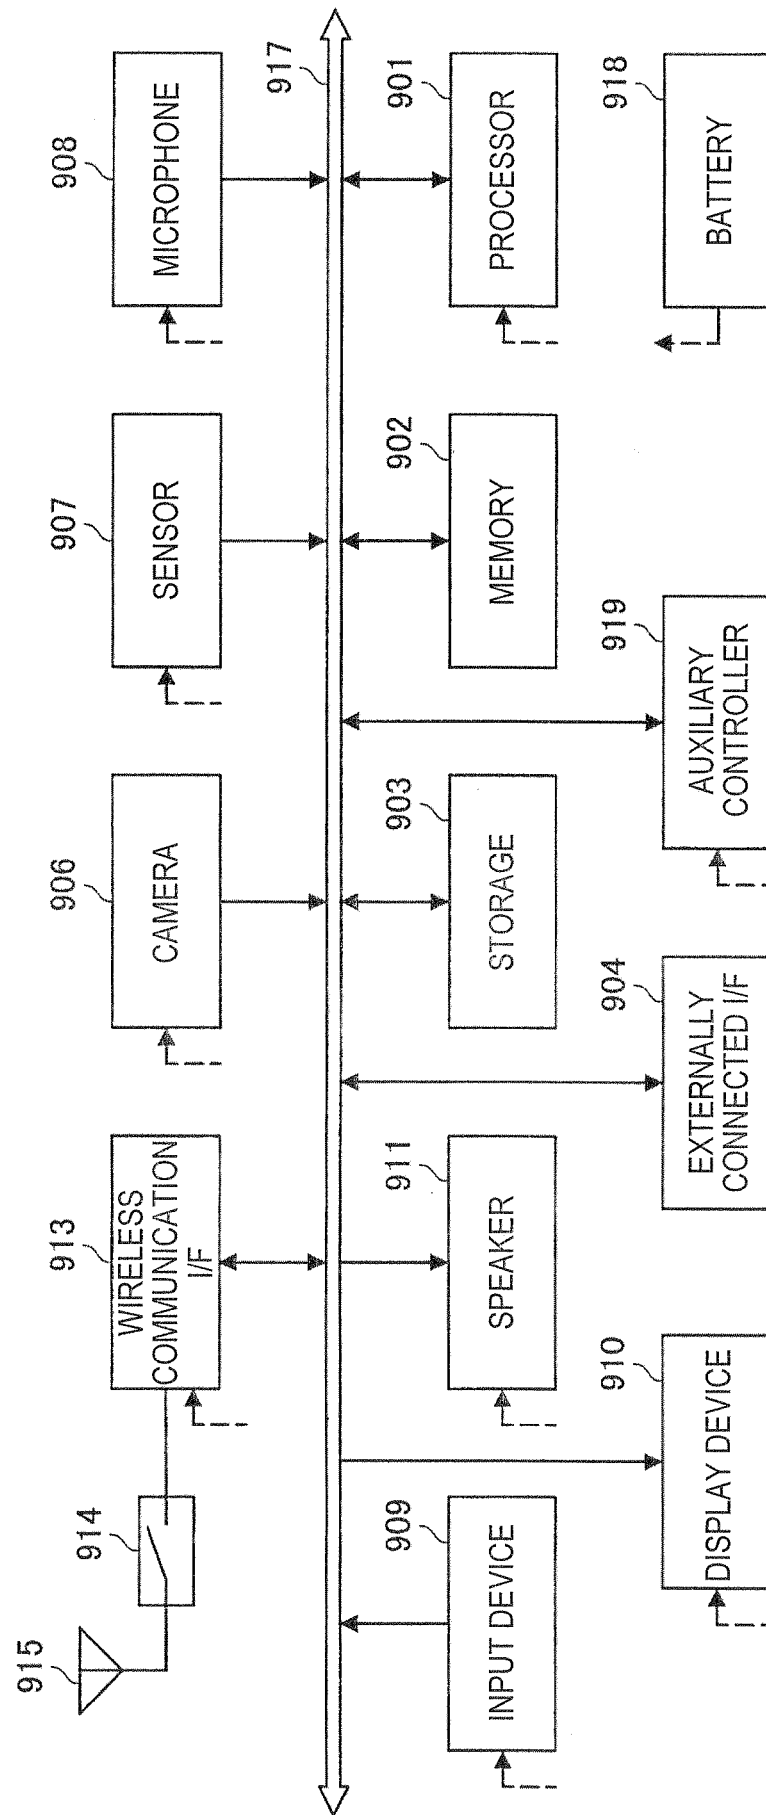


FIG. 22

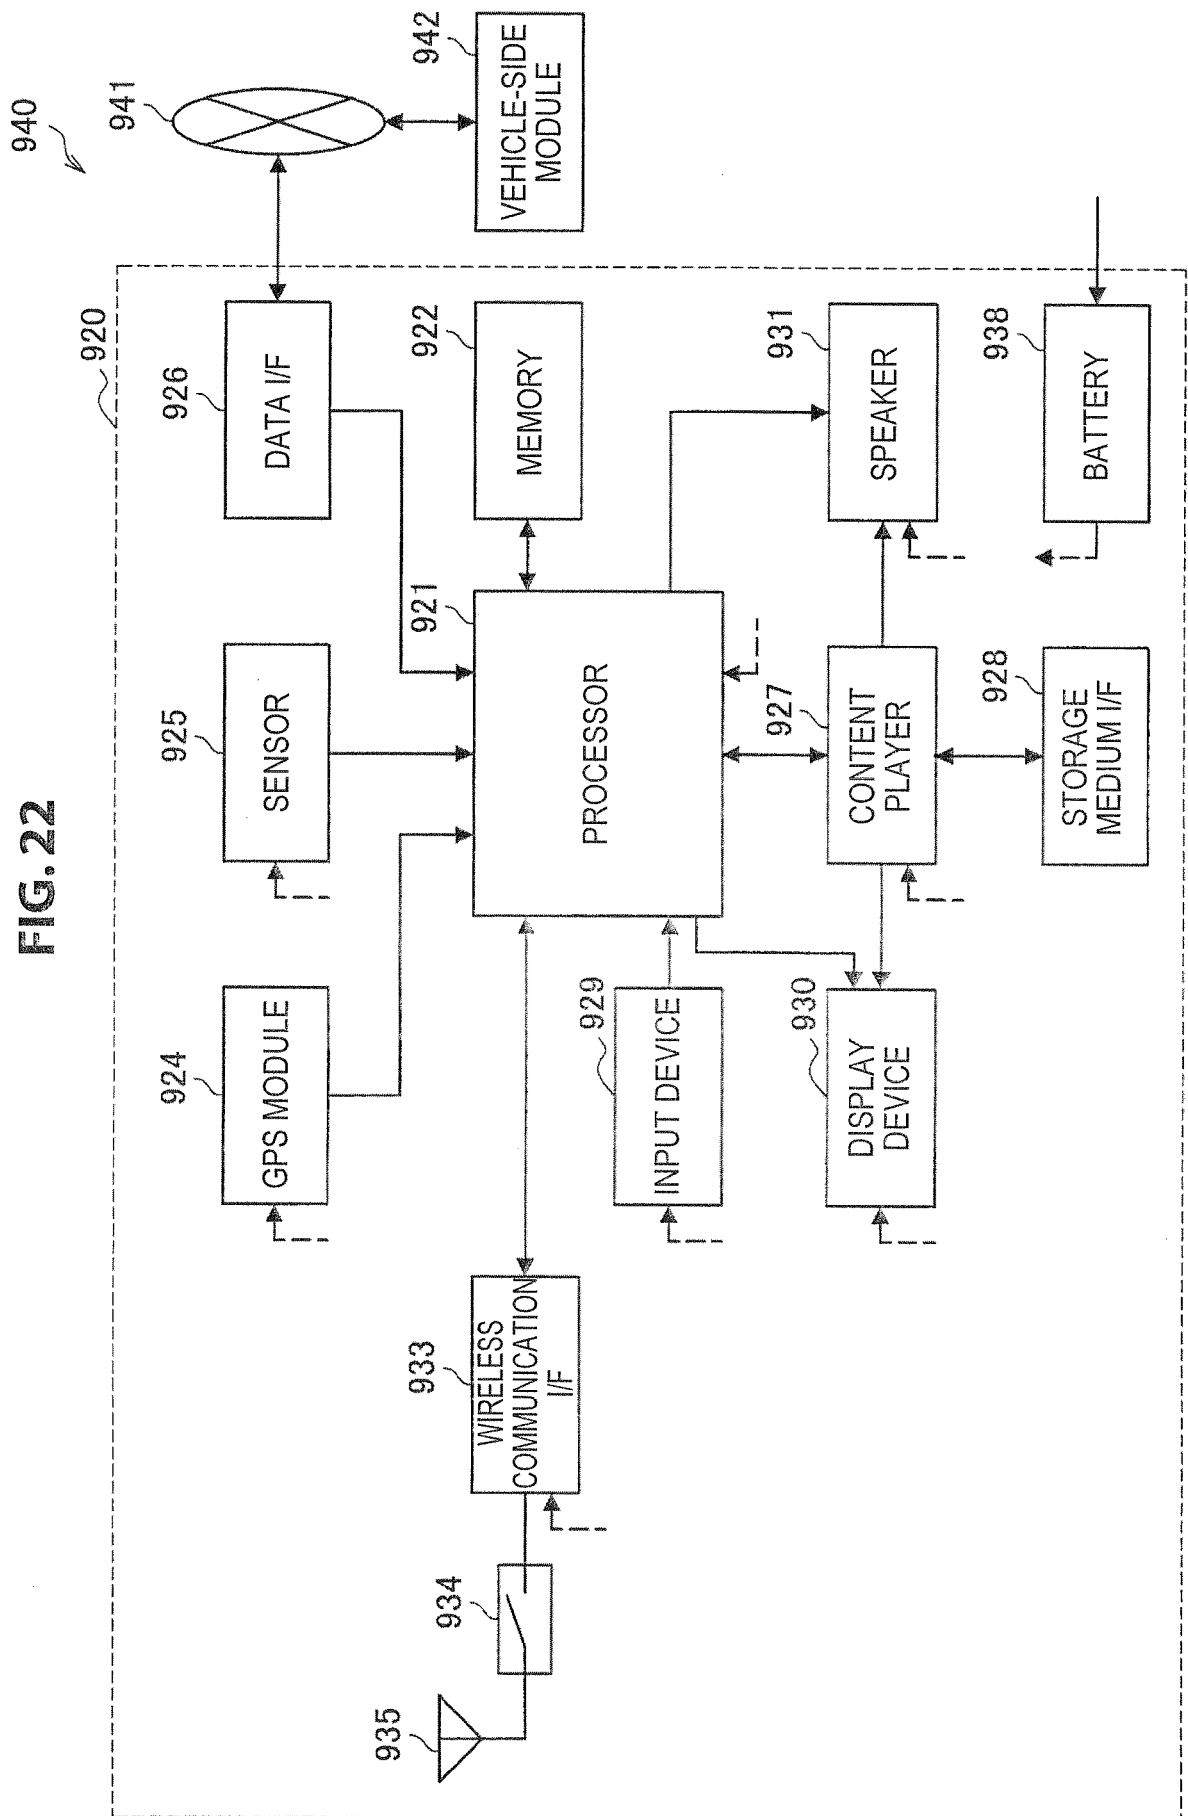


FIG. 23