

TITLE OF THE INVENTION

| SAMPLE SEPARATING APPARATUS AND METHOD, AND
SUBSTRATE MANUFACTURING METHOD | ✓

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a sample
separating apparatus and method, and a substrate
10 manufacturing method and, for example, to an apparatus
and method of separating a plate-like sample having an
internal fragile layer at the fragile layer, a sample
support apparatus used in the separating apparatus, and
a substrate manufacturing method using the separating
15 apparatus.

DESCRIPTION OF THE RELATED ART

A substrate (SOI substrate) having an SOI (Silicon
On Insulator) structure is known as a substrate having a
20 single-crystal Si layer on an insulating layer. A device
using this SOI substrate has many advantages that cannot
be achieved by ordinary Si substrates. Examples of the
advantages are as follows.

- (1) The integration degree can be increased
25 because dielectric isolation is easy.
- (2) The radiation resistance can be increased.

This Sheet Has Been Replaced



(3) The operating speed of the device can be increased because the stray capacitance is small.

(4) No well step is necessary.

(5) Latch-up can be prevented.

5 (6) A completely depleted field-effect transistor can be formed by thin film formation.

Since an SOI structure has the above various advantages, researches have been made on its formation method for several decades.

10 As one SOI technology, an SOS (Silicon On Sapphire) technology by which Si is heteroepitaxially grown on a single-crystal sapphire substrate by CVD (Chemical Vapor Deposition) has been known for a long time. This SOS technology was once recognized as the most matured SOI
15 technology. However, the SOS technology has not been put into practical use to date because, e.g., a large amount of crystal defects are produced by lattice mismatch in the interface between the Si layer and the underlying sapphire substrate, aluminum that forms the sapphire
20 substrate mixes in the Si layer, the substrate is expensive, and it is difficult to obtain a large area.

Various SOI technology appeared following the SOS technology. For these SOI technologies, various methods have been examined aiming at reducing crystal defects or
25 manufacturing cost. There are a method of implanting oxygen ions into a substrate to form a buried oxide

THIS SHEET HAS BEEN
REPLACED



layer, a method of bonding two wafers via an oxide film and polishing or etching one of the wafers to leave a thin single-crystal Si layer on the oxide film, and a method of implanting hydrogen ions to a predetermined
5 depth from the surface of an Si substrate having an oxide film, bonding the Si substrate to the other substrate, and peeling the latter substrate (the other substrate) by a heat treatment while leaving a thin single-crystal Si layer on the oxide film.

10 The present applicant has disclosed a new SOI technology in Japanese Patent Laid-Open No. 5-21338. In this technology, a first substrate obtained by forming a non-porous single-crystal layer (including a single-crystal Si layer) on a single-crystal
15 semiconductor substrate having a porous layer is bonded to a second substrate via an insulating layer (SiO_2), and the two substrates are separated from the porous layer to transfer the non-porous single-crystal layer to the second substrate. This technology is advantageous in
20 that the SOI layer has high film thickness uniformity, the crystal defect density in the SOI layer can be decreased, the SOI layer has high surface planarity, no expensive special fabrication apparatus is necessary, and SOI substrates having SOI films about a few hundred
25 ~ to 10 μm thick can be fabricated by the same fabrication apparatus.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced


In addition, the present applicant has disclosed another technology in Japanese Patent Laid-Open No. 7-302889 in which, after the first and second substrates described above are bonded, the first substrate is separated from the second substrate without breaking, and the separated first substrate is reused by smoothening the surface and again forming a porous layer. Since the first substrate can be economically used, this technology has the advantages that the fabrication cost can be largely reduced and the fabrication process is also simple.


In the above technologies, however, when the two bonded substrates are separated it is necessary to prevent damages to the substrates and protect the fabrication apparatus and the like from contamination caused by the generation of particles.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above situation, and has as its object to provide a separating apparatus and method suitable to separate a sample such as a substrate, a sample support apparatus used in this separating apparatus, and a substrate manufacturing method using the separating apparatus.

According to the present invention, there is

THIS SHEET HAS BEEN
REPLACED



provided a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a jet unit for ejecting a fluid to the sample, and a pair of
5 holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central portion due to a pressure of the fluid ejected from the jet unit and injected into the
10 sample.

According to the present invention, there is also provided a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a jet
15 unit for ejecting a fluid to the sample, and a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample which can corrugate due to a pressure of the fluid ejected from the jet unit and injected into
20 the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has a hollow contact portion, and the sample is held by bringing the contact portion into contact with the sample. The contact
25 portion may comprise a multiple of contact portions.

In the separating apparatus, preferably, at least

THIS SHEET HAS BEEN
REPLACED



one of the pair of holding portions has an annular contact portion, and the sample is held by bringing the contact portion into contact with the sample. The contact portion may comprise a multiple of contact-
5 portions.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing the contact portion into
10 contact with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by bringing the contact portion into contact
15 with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing the contact
20 portion into contact with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has a radial contact portion, and the sample is held by bringing the contact portion into contact with the sample.

25 In the separating apparatus, preferably, at least one of the pair of holding portions has a contact

THIS SHEET HAS BEEN
REPLACED



portion which comes into contact with a peripheral
portion of the sample, and the sample is held by
bringing the contact portion into contact with the
sample. Preferably, the contact portion can contact the
5 whole peripheral portion of the sample.

The separating apparatus preferably further
comprises a rotary mechanism for rotating the holding
portion about a shaft perpendicular to a surface of the
sample.

10 The separating apparatus preferably further
comprises an adjustment mechanism for adjusting an
interval between the pair of holding portions.

In the separating apparatus, preferably, in
separating the sample by the fluid, the adjustment
15 mechanism presses the sample to adjust the interval
between the pair of holding portions.

In the separating apparatus, preferably, in
separating the sample by the fluid, the adjustment
mechanism maintains a substantially constant interval
20 between the pair of holding portions.

In the separating apparatus, preferably, each of
the pair of holding portions has a chuck mechanism for
vacuum-chucking the sample.

The separating apparatus is suitable for processing
25 of separating a substrate having a porous layer as the
fragile layer.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

According to the present invention, there is also provided a support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer-at
5 the fragile layer, characterized by comprising a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central portion due to a pressure of a
10 fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample.

According to the present invention, there is also provided a support apparatus for supporting a sample, which is used in a separating apparatus for separating a
15 plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample to allow the sample to corrugate due to
20 a pressure of a fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has a hollow contact
25 portion, and the sample is held by bringing the contact portion into contact with the sample. The contact

THIS SHEET HAS BEEN
REPLACED



portion may comprise a multiple of contact portions.

In the support apparatus, preferably, at least one of the pair of holding portions has an annular contact portion, and the sample is held by bringing the contact
5 portion into contact with the sample. The contact portion may comprise a multiple of contact portions.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is
10 held by bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by
15 bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of projecting contact portions on a main body surface,
20 and the sample is held by bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has a radial contact portion, and the sample is held by bringing the contact
25 portion into contact with the sample.

In the support apparatus, preferably, at least one

THIS SHEET HAS BEEN
REPLACED



of the pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing the contact portion into contact with the sample.

- 5 Preferably, the contact portion can contact the whole peripheral portion of the sample.

The support apparatus preferably further comprises a rotary mechanism for rotating the holding portion about a shaft perpendicular to a surface of the sample.

- 10 The support apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

- In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism
15 presses the sample to adjust the interval between the pair of holding portions.

- In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism maintains a substantially constant interval between the
20 pair of holding portions.

In the support apparatus, preferably, each of the pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

- The support apparatus is suitable as a support
25 apparatus for supporting a substrate having a porous layer as the fragile layer during separation processing.

THIS SHEET HAS BEEN
REPLACED



According to the present invention, there is also provided a sample separating method characterized by comprising separating a sample having a fragile layer using the above separating apparatus.

5 In the separating method, preferably, water is used as the fluid to be ejected from the jet unit.

According to the present invention, there is also provided a separating method of separating a substrate at a porous layer, the substrate being formed by bonding
10 a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, characterized in that the above separating apparatus is used for separation.

15 According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one
20 surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the above separating apparatus is used in the separation step.

According to the present invention, there is also provided a separating apparatus for separating a
25 plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a jet

THIS SHEET HAS BEEN
REPLACED



unit for ejecting a fluid to the sample, and a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions allow the sample to warp as the sample is divided into
5 two parts by a pressure of the fluid ejected from the jet unit and injected into the sample and simultaneously limit a warp amount.

In the separating apparatus, preferably, at least one of the pair of holding portions has a smooth convex
10 support surface, and the sample is held by the support surface.

In the separating apparatus, the support surface preferably substantially comprises part of a spherical surface.

15 In the separating apparatus, the support surface preferably comprises a surface formed by a cone with a convex vertex.

In the separating apparatus, the support surface preferably substantially comprises a surface formed by a
20 frustum of a cone.

In the separating apparatus, the support surface preferably comprises a smooth convex surface formed by a stack of several frustums.

In the separating apparatus, the support surface
25 preferably comprises a convex surface formed by a stack of several columns.

THIS SHEET HAS BEEN
REPLACED



In the separating apparatus, at least one of the pair of holding portions preferably includes an elastic member and deforms due to a force inflicted by the sample.

- 5 In the separating apparatus, preferably, at least one of the holding portions has a support portion partially consisting of an elastic material, and the sample is held by the support portion.

- 10 In the separating apparatus, at least one of the holding portions preferably has an elastic member at a portion which can contact the sample.

In the separating apparatus, at least one of the holding portions preferably has an annular support portion consisting of an elastic member.

- 15 In the separating apparatus, at least one of the holding portions preferably has a support portion coupled to a main body via an elastic member.

- 20 The separating apparatus preferably further comprises a rotary mechanism for rotating the holding portion about a shaft perpendicular to a surface of the sample.

The separating apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

- 25 In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment



mechanism presses the sample to adjust the interval between the pair of holding portions.

In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment-
5 mechanism maintains a substantially constant interval between the pair of holding portions.

In the separating apparatus, each of the pair of holding portions preferably has a chuck mechanism for vacuum-chucking the sample.

10 The separating apparatus is suitable for processing of separating a substrate having a porous layer as the fragile layer.

According to the present invention, there is also provided a support apparatus for supporting a sample,
15 which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a pair of holding portions for sandwiching and holding the sample, wherein the pair of holding portions allow the sample to
20 warp as the sample is divided into two parts by a pressure of the fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample and simultaneously limit a warp amount.

In the support apparatus, preferably, at least one
25 of the pair of holding portions has a smooth convex support surface, and the sample is held by the support



surface.

In the support apparatus, the support surface preferably substantially comprises part of a spherical surface.

5 In the support apparatus, the support surface preferably comprises a surface formed by a cone with a convex vertex.

In the support apparatus, the support surface preferably substantially comprises a surface formed by a
10 frustum of a cone.

In the support apparatus, the support surface preferably comprises a smooth convex surface formed by a stack of several frustums.

In the support apparatus, the support surface
15 preferably comprises a convex surface formed by a stack of several columns.

In the support apparatus, at least one of the pair of holding portions preferably includes an elastic member and deforms due to a force inflicted by the
20 sample.

In the support apparatus, preferably, at least one of the holding portions has a support portion partially consisting of an elastic material, and the sample is held by the support portion.

25 In the support apparatus, at least one of the holding portions preferably has an elastic member at a

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



portion which can contact the sample.

In the support apparatus, at least one of the holding portions preferably has an annular support portion consisting of an elastic member.

5 In the support apparatus, at least one of the holding portions preferably has a support portion coupled to a main body via an elastic member.

The support apparatus preferably further comprises a rotary mechanism for rotating the holding portion
10 about a shaft perpendicular to a surface of the sample.

The support apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

In the support apparatus, preferably, in separating
15 the sample by the fluid, the adjustment mechanism presses the sample to adjust the interval between the pair of holding portions.

In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism
20 maintains a substantially constant interval between the pair of holding portions.

In the support apparatus, each of the pair of holding portions preferably has a chuck mechanism for vacuum-chucking the sample.

25 The support apparatus is suitable as a support apparatus for supporting a substrate having a porous



layer as the fragile layer during separation processing.

According to the present invention, there is also provided a sample separating method characterized by comprising separating a sample having a fragile layer
5 using the above separating apparatus.

In the separating method, water is preferably used as the fluid to be ejected from the jet unit.

According to the present invention, there is also provided a separating method of separating a substrate
10 at a porous layer, the substrate being formed by bonding a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, characterized in that the above separating
15 apparatus is used for separation.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer side of a first substrate, in which a porous layer and
20 the non-porous layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the above separating apparatus is used in the separation step.

The present invention has been made in
25 consideration of the above situation, and has as its object to provide a separating apparatus and method

THIS SHEET HAS BEEN
REPLACED



suitable to separate a plate-like sample represented by a substrate such as a bonded substrate stack, and a substrate manufacturing method to which the apparatus or method is applied.

5 According to the present invention, there is provided a separating apparatus for separating a plate-like sample, characterized by comprising a jet unit for ejecting a fluid for separating the sample to the sample, and first and second holding portions for
10 sandwiching and holding the sample, wherein the first and second holding portions have holding surfaces with different shapes.

 In the separating apparatus, preferably, the first holding portion holds one surface of the sample to make
15 a deflection amount of the one surface due to a pressure of the fluid injected into the sample relatively small, and the second holding portion holds the other surface of the sample to make a deflection amount of the other surface due to the pressure of the fluid relatively
20 large.

 In the separating apparatus, preferably, the first holding portion holds one surface of the sample not to cause the one surface to deflect due to a pressure of the fluid injected into the sample, and the second
25 holding portion holds the other surface of the sample to cause the other surface to deflect due to the pressure



of the fluid.

In the separating apparatus, the holding surface of the first holding portion and the holding surface of the second holding portion preferably have different areas.

5 In the separating apparatus, preferably, the first holding portion has a holding surface for wholly holding one surface of the sample, and the second holding portion has a holding surface for partially holding the other surface of the sample.

10 In the separating apparatus, the holding surface of the first holding portion preferably comprises a flat surface.

In the separating apparatus, the holding surface of the first holding portion preferably comprises a curved
15 surface.

In the separating apparatus, the holding surface of the second holding portion is preferably annular.

In the separating apparatus, preferably, the second holding portion has a plurality of projecting members,
20 and the sample is held by tips of the plurality of projecting members.

In the separating apparatus, the second holding portion preferably has a shape allowing the sample to deflect while expanding at a central portion on a side
25 of the second holding portion due to the pressure of the fluid injected into the sample.

THIS SHEET HAS BEEN
REPLACED



In the separating apparatus, the second holding portion preferably has a shape allowing the sample to deflect and corrugate on a side of the second holding portion due to the pressure of the fluid injected into
5 the sample.

The separating apparatus preferably further comprises a rotary mechanism for rotating at least one of the first and second holding portions about a shaft perpendicular to the holding surface to rotate the
10 sample.

In the separating apparatus, preferably, the sample to be processed comprises a substrate formed by bonding first and second substrates, and the first and second substrates have different strengths.

15 According to the present invention, there is also provided a separating method of separating a plate-like sample, characterized by comprising holding the sample by sandwiching the sample by a pair of holding portions having holding surfaces with different shapes, and
20 ejecting a fluid to a predetermined position in a direction of thickness of the sample, thereby separating the sample.

In the separating method, preferably, the sample to be separated has an internal fragile layer, and in
25 separating the sample, the fluid is ejected to the fragile layer.

THIS SHEET HAS BEEN
REPLACED



According to the present invention, there is also provided a separating method of separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising the separation step
5 of ejecting a fluid to the fragile layer of the sample to separate the sample, wherein in the separation step, one surface of the sample is held to make a deflection amount due to a pressure of the fluid injected into the sample relatively small and the other surface of the
10 sample is held to make a deflection amount due to the pressure of the fluid injected into the sample relatively large.

According to the present invention, there is also provided a separating method of separating a plate-like
15 sample having an internal fragile layer at the fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample, wherein in the separation step, one surface of the sample is held to limit deflection
20 due to a pressure of the fluid injected into the sample and the other surface of the sample is held to allow deflection due to the pressure of the fluid injected into the sample.

The separating method preferably further comprises
25 rotating the sample about a shaft perpendicular to a major surface of the sample in separating the sample by

THIS SHEET HAS BEEN
REPLACED




the fluid.

In the separating method, preferably, the sample to be processed comprises a sample formed by bonding first and second substrates, and the first and second

5 substrates have different strengths.

According to the present invention, there is also provided a separating method of separating a composite substrate which has a fragile layer between a first substrate having a relatively low strength and a second
10 substrate having a relatively high strength, at the fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer to separate the composite substrate, wherein in the separation step, the first substrate is held to make a
15 deflection amount due to a pressure of the fluid injected into the composite substrate relatively small and the second substrate is held to make a deflection amount due to the pressure of the fluid injected into the composite substrate relatively large.

20 According to the present invention, there is also provided a separating method of separating a composite substrate which has a fragile layer between a first substrate having a relatively low strength and a second substrate having a relatively high strength, at the
25 fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer



to separate the composite substrate, wherein in the separation step, the first substrate is held to limit deflection due to a pressure of the fluid injected into the composite substrate and the second substrate is held
5 to allow deflection due to the pressure of the fluid injected into the composite substrate.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer
10 side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein any one of the above separating apparatuses is used in the
15 separation step.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
20 layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the separation step is executed using any one of the above methods.

According to the present invention, there is also
25 provided a holding apparatus for holding a sample in ejecting a fluid to a predetermined position in a

THIS SHEET HAS BEEN
REPLACED



direction of thickness of the sample to separate the sample, characterized in that the sample is held by a pair of holding portions whose holding surfaces for holding the sample have different shapes.

5 Further objects, features and advantages of the present invention will become apparent from the following detailed description of embodiments of the present invention with reference to the accompanying drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A to 1E are views for explaining a method of manufacturing an SOI substrate according to the first embodiment of the present invention;

15 Fig. 2 is a view showing the schematic arrangement of a separating apparatus according to the first embodiment of the present invention;

Fig. 3 is a perspective view of substrate holding portions according to the first example of the first
20 embodiment;

Fig. 4 is a front view of the substrate holding portion according to the first example of the first embodiment;

Fig. 5 is a sectional view of the substrate holding
25 portions according to the first example of the first embodiment;

This Sheet Has Been Replaced



Fig. 6 is a view showing a modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 7 is a view showing another modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 8 is a view showing still another modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 9 is a view showing still another modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 10 is a front view of a substrate holding portion according to the second example of the first embodiment;

Fig. 11 is a sectional view of the substrate holding portions according to the second example of the first embodiment;

Fig. 12 is a perspective view of substrate holding portions according to the third example of the first embodiment;

Fig. 13 is a perspective view showing a modification of the substrate holding portions according to the third example of the first embodiment;

Fig. 14 is a perspective view of substrate holding portions according to the fourth example of the first

This Sheet Has Been Replaced



embodiment;

Fig. 15 is a perspective view showing a modification of the substrate holding portions according to the fourth example of the first embodiment;

5 Fig. 16 is a perspective view of substrate holding portions according to the fifth example of the first embodiment;

Fig. 17 is a front view of the substrate holding portion according to the fifth example of the first
10 embodiment;

Fig. 18 is a perspective view of substrate holding portions according to the sixth example of the first embodiment;

Fig. 19 is a front view of the substrate holding
15 portion according to the sixth example of the first embodiment;

Fig. 20 is a perspective view showing a modification of the substrate holding portions according to the sixth example of the first embodiment;

20 Fig. 21 is a perspective view showing another modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 22 is a perspective view showing still another modification of the substrate holding portions according
25 to the sixth example of the first embodiment;

Fig. 23 is a perspective view showing still another

modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 24 is a perspective view showing still another modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 25 is a sectional view of substrate holding portions according to the seventh example of the first embodiment;

Fig. 26 is a sectional view of the substrate holding portions according to the seventh example of the first embodiment;

Figs. 27A and 27B are views showing a force acting on a bonded substrate stack in the presence and absence of a V-shaped groove;

Fig. 28 is a view showing the schematic arrangement of a separating apparatus according to the second embodiment of the present invention;

Fig. 29 is a perspective view of substrate holding portions according to the first example of the second embodiment;

Fig. 30 is a sectional view of the substrate holding portions according to the first example of the second embodiment;

Fig. 31 is a sectional view of the substrate holding portions according to the first example of the second embodiment;

This Sheet Has Been Replaced



Fig. 32 is a sectional view showing a modification of the substrate holding portions according to the first example of the second embodiment;

Fig. 33 is a sectional view showing another
5 modification of the substrate holding portions according to the first example of the second embodiment;

Fig. 34 is a sectional view showing still another modification of the substrate holding portions according to the first example of the second embodiment;

10 Fig. 35 is a sectional view showing still another modification of the substrate holding portions according to the first example of the second embodiment;

Fig. 36 is a sectional view showing a modification of substrate holding portions according to the second
15 example of the second embodiment;

Fig. 37 is a sectional view showing another modification of the substrate holding portions according to the second example of the second embodiment;

Fig. 38 is a sectional view showing still another
20 modification of the substrate holding portions according to the second example of the second embodiment;

Fig. 39 is a sectional view showing still another modification of the substrate holding portions according to the second example of the second embodiment;

25 Fig. 40 is a sectional view showing still another modification of the substrate holding portions according



to the second example of the second embodiment;

Figs. 41A to 41E are views showing for explaining
another method of manufacturing an SOI substrate
according to the preferred embodiment of the present
5 invention;

Fig. 42 is a view showing the schematic arrangement
of a separating apparatus according to the third
embodiment of the present invention;

Fig. 43 is a perspective view of part of the
10 separating apparatus shown in Fig. 42;

Fig. 44 is a view schematically showing separation
processing;

Fig. 45 is a view showing the schematic arrangement
of a separating apparatus of the first modification;

15 Fig. 46 is a view showing the schematic arrangement
of substrate holding portions of a separating apparatus
of the second modification;

Fig. 47 is a view showing the schematic arrangement
of a substrate holding portion (on the first substrate
20 side) of the third modification; and

Fig. 48 is a view showing the schematic arrangement
of the other substrate holding portion (on the second
substrate side) of the third modification.

25 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will

THIS SHEET HAS BEEN
REPLACED



be described below with reference to the accompanying drawings.

Figs. 1A to 1E are views for explaining a method of manufacturing an SOI substrate according to a preferred
5 embodiment of the present invention.

Referring to Fig. 1A, a single-crystal Si substrate 11 is prepared, and a porous Si layer 12 is formed on the surface of the single-crystal Si substrate 11 by anodizing. Referring to Fig. 1B, a non-porous
10 single-crystal Si layer 13 is epitaxially grown on the porous Si layer 12. With this process, a first substrate 10 is formed.

Referring to Fig. 1C, a second substrate 20 having an insulating layer (e.g., an SiO₂ layer) 15 formed on
15 the surface of a single-crystal Si substrate 14 is prepared. The first substrate 10 and the second substrate 20 are brought into contact with each other at room temperature such that the non-porous single-crystal Si layer 13 opposes the insulating layer 15. After this,
20 the first substrate 10 and the second substrate 20 are bonded by anode bonding, pressing, heating, or a combination thereof. With this process, the non-porous single-crystal Si layer 13 and the insulating layer 15 are firmly bonded. The insulating layer 15 may be formed
25 on the single-crystal Si substrate 14 side, as described above, on the non-porous single-crystal Si layer 13 as



will be described later, or on both the single-crystal Si substrate 14 and the non-porous single-crystal Si layer 13 sides as far as the state shown in Fig. 1C is obtained by bringing the first and second substrates
5 into contact.

Referring to Fig. 1D, the two substrates bonded to each other are separated at the porous Si layer 12. The second substrate side (10" + 20) has a multilayered structure of a porous Si layer 12", single-crystal Si
10 layer 13, insulating layer 15, and single-crystal Si substrate 14. On the first substrate side (10'), a porous Si layer 12' is formed on the single-crystal Si substrate 11.

After separation, the remaining porous Si layer 12'
15 is removed from the substrate 10'. The surface of the substrate 10' is planarized, as needed, so the substrate 10' is used again as a single-crystal Si substrate 11 for forming a first substrate 10.

After the bonded substrate stack is separated, in
20 Fig. 1E, the porous layer 12" on the second substrate side (10" + 20) is selectively removed. With this process, a substrate having a multilayered structure of the single-crystal Si layer 13, insulating layer 15, and single-crystal Si substrate 14, i.e., an SOI structure
25 is obtained.

Figs. 41A to 41E are views for explaining another

This Sheet Has Been Replaced



method of manufacturing an SOI substrate according to the preferred embodiment of the present invention.

Referring to Fig. 41A, a single-crystal Si substrate 11 is prepared, and a porous Si layer 12 is
5 formed on the surface of the single-crystal Si substrate 11 by anodizing. Referring to Fig. 41B, a single-crystal Si layer 13 as a non-porous layer is epitaxially grown on the porous Si layer 12. After this, the surface of the single-crystal Si layer 13 is oxidized to form an
10 SiO₂ layer 15. With this process, a first substrate 10 is formed.

Referring to Fig. 41C, a single-crystal Si substrate 14 is prepared as a second substrate 20. The first substrate 10 and the second substrate 20 are
15 brought into contact with each other at room temperature such that the SiO₂ layer 15 of the first substrate 10 opposes the second substrate 20. The first substrate 10 and the second substrate 20 are bonded by anode bonding, pressing, heating, or a combination thereof. With this
20 process, the second substrate 20 and the SiO₂ layer 15 are firmly bonded. The SiO₂ layer 15 may be formed on the single-crystal Si substrate 11 side, on the second substrate 20, as described above, or on both the single-crystal Si substrate 11 and the second substrate
25 20 sides as far as the state shown in Fig. 41C is obtained by bringing the first and second substrates



into contact.

Referring to Fig. 41D, the two substrates bonded to each other are separated at the porous Si layer 12. The second substrate side has a multilayered structure of a porous Si layer 12", single-crystal Si layer 13, SiO₂ layer 15, and single-crystal Si substrate 14. On the first substrate 10' side, the porous Si layer 12' is formed on the single-crystal Si substrate 11.

After separation, the remaining porous Si layer 12' is removed from the substrate 10'. The surface of the substrate 10' is planarized, as needed, so the substrate 10' is used again as a single-crystal Si substrate 11 for forming a first substrate 10.

After the bonded substrate stack is separated, in Fig. 41E, the porous layer 12" on the second substrate side (10" + 20) is selectively removed. With this process, a substrate having a multilayered structure of the single-crystal Si layer 13, insulating layer 15, and single-crystal Si substrate 14, i.e., an SOI structure is obtained.

As the second substrate, in addition to a single-crystal Si substrate, an insulating substrate (e.g., a substrate of silica glass) or a transparent substrate (e.g., a substrate of silica glass) can be used.

In this embodiment, to facilitate processing of

THIS SHEET HAS BEEN
REPLACED



bonding two substrates and separating them, a porous Si layer 12 having a fragile structure is formed in the separation region. In place of the porous layer, a microcavity layer may be formed. A microcavity layer can
5 be formed by, e.g., implanting ions into a semiconductor substrate.

The substrate manufactured by the above manufacturing method can be applied not only to manufacture a semiconductor device but also to
10 manufacture a microstructure.

In this embodiment, in the step shown in Fig. 1D or 41D, i.e., in the step of separating the two substrates bonded to each other (to be referred to as a bonded substrate stack hereinafter), a separating apparatus for
15 selectively ejecting a high-pressure liquid or gas (fluid) to the porous Si layer as a separation region is used to separate the substrate stack into two substrates at the separation region.

[First Embodiment]

20 [Basic Arrangement of Separating Apparatus]

This separating apparatus uses the water jet method. Generally, the water jet method ejects a high-speed, high-pressure stream of water (when a hard object is to be cut, an abrasive is added to water) upon
25 an object to, e.g., cut or process a ceramic, a metal, a concrete, a resin, a rubber, or a wood member, remove a



coating film from the surface, or clean the surface
("Water Jet", Vol. 1, No. 1, page 4, (1984)).

Conventionally, the water jet method is used to perform
the above-described cutting, processing, remove a
5 coating film, or clean the surface mainly by partially
removing the material.

This separating apparatus ejects a high-speed,
high-pressure stream of fluid to the porous layer
(separation region) of the bonded substrate stack as a
10 fragile structure portion in the direction of substrate
surface to selectively break the porous layer, thereby
separating the substrate at the porous layer. The stream
will be referred to as a "jet" hereinafter. The fluid
forming a jet will be referred to as a "jet medium". As
15 the jet medium, it is possible to use an organic solvent
such as water or alcohol, an acid such as fluoric acid
or nitric acid, an alkali such as potassium hydroxide, a
gas such as air, nitrogen gas, carbonic acid gas, rare
gas, or an etching gas, or a plasma.

20 When this separating apparatus is to be applied to
manufacture a semiconductor device, e.g., separate a
bonded substrate stack, pure water with minimum impurity
metals or particles is preferably used as the jet
medium. However, since separation processing is a
25 perfect low-temperature process, water with high purity
need not always be used as the jet medium, and the

THIS SHEET HAS BEEN
REPLACED



substrate may be cleaned after completion of separation processing.

In this separating apparatus, a jet is ejected to the porous layer (separation region) exposed to the side surface of the bonded substrate stack, thereby removing the porous layer from the peripheral portion to the central portion. With this process, the bonded substrate stack is separated into two substrates by removing only the separation region with low mechanical strength without damaging the main body. Even when the side surface of the bonded substrate stack is covered with some thin layer, and the porous layer is not exposed, the thin layer can be removed by the jet, so the bonded substrate stack can be separated by the above-described method.

To separate the bonded substrate stack only by the cutting force of jet, a high pressure of several thousand kgf/cm^2 or more must be applied to the jet medium. In this case, the outer peripheral portion of the bonded substrate stack may be damaged, or the internal pressure of the separation region may increase to break the bonded substrate stack.

To avoid this situation, the pressure to be applied to the jet medium is preferably set to be as low as about 500 kgf/cm^2 . When such a low-pressure jet is employed, the bonded substrate stack is separated by

injecting the jet medium into the bonded substrate stack to expand and split it into two substrates rather than by colliding the jet against the porous layer to cut the porous layer by impact. Therefore, offcut is rarely
5 produced, and damages to substrates decrease. In addition, the jet medium need contain no abrasive.

At the peripheral portion of the bonded substrate stack, the effect for splitting the bonded substrate stack into two substrates effectively acts when a
10 V-shaped (concave) groove is formed in the bonded substrate stack along the side surface. Figs. 27A and 27B are views showing a force acting on the bonded substrate stack in the presence and absence of a V-shaped groove. Fig. 27A shows a bonded substrate stack
15 having a V-shaped groove 22. Fig. 27B shows a bonded substrate stack having no V-shaped groove.

As shown in Fig. 27A, in the bonded substrate stack having the V-shaped groove 22, a force (to be referred to as a separation force hereinafter) is applied outward
20 from the center of the bonded substrate stack, as indicated by an arrow 23. On the other hand, as shown in Fig. 27B, in the bonded substrate stack with a convex side surface, a force is applied inward from the side surface of the bonded substrate stack, as indicated by
25 an arrow 24. In the bonded substrate stack having a convex side surface, the separation force does not act



unless the side surface of the porous layer 12 as the separation region is removed by a jet 21.

Even when a thin film is formed on the side surface of the bonded substrate stack, the separation force acts
5 on the bonded substrate stack as far as the bonded substrate stack has the V-shaped groove 22, as shown in Fig. 27A, so the thin layer can be easily broken.

To prevent damages to the substrates, the separation force in the axial direction of the bonded
10 substrate stack is preferably set to be several hundred gf/cm².

To effectively use the jet, a width W1 of the V-shaped groove 22 is preferably equal to or larger than a diameter d of the jet 21. For example, assume that
15 each of the first substrate (10) and the second substrate (20) has a thickness of about 1 mm, and the bonded substrate stack has a thickness of about 2 mm. Since the width W1 of the V-shaped groove 22 is normally around 1 mm, the diameter of the jet is preferably 1 mm
20 or less. Since a general water jet apparatus uses a jet with a diameter of approximately 0.1 to 0.5 mm, such a general water jet apparatus (e.g., a water jet nozzle) can be used.

The nozzle for ejecting a jet can have not only a
25 circular shape but any other shapes. For example, when a slit-like nozzle is employed to eject a jet having a



long rectangular section, the jet can be efficiently injected into the separation region (inserted between the two substrates).

The jet ejection conditions are determined in accordance with the type of separation region (e.g., a porous layer) or the shape of the side surface of the bonded substrate stack. Important parameters as the jet ejection conditions are the pressure applied to the jet medium, the jet scanning speed, the width or diameter of the nozzle (the nozzle diameter is almost the same as the jet diameter), the nozzle shape, the distance between the nozzle and the separation region, and the flow rate of the jet medium.

The following techniques are used to separate the bonded substrate stack. 1) The jet is injected into the bonding interface parallel to the bonding interface while the nozzle is scanned along the bonding interface. 2) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is scanned. 3) The jet is injected into the bonding interface parallel to the bonding interface and simultaneously scanned in a fan shape at a pivot near the nozzle. 4) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is rotated about nearly the center of the bonded substrate stack (this technique



is particularly effective when the bonded substrate stack has a disk shape). The jet need not always be ejected to be perfectly parallel to the bonding interface.

5 Fig. 2 is a view showing the schematic arrangement of a separating apparatus according to the first embodiment of the present invention. To separate a bonded substrate stack by a low-pressure jet, a separating apparatus 100 supports the bonded substrate
10 stack such that the separation force efficiently acts on the bonded substrate stack. As a specific example, the separating apparatus 100 supports a bonded substrate stack such that the bonded substrate stack can expand at its central portion by the pressure of the jet medium
15 injected into the bonded substrate stack. As another example, the separating apparatus 100 supports a bonded substrate stack such that the bonded substrate stack can corrugate by the pressure of the jet medium injected into the bonded substrate stack.

20 The separating apparatus 100 has substrate holding portions 120 and 150 having vacuum chuck mechanisms. A bonded substrate stack 101 is sandwiched by the substrate holding portions 120 and 150 and held. The bonded substrate stack 101 has a porous layer 101b as an
25 internal fragile structure and is separated into two substrates 101a and 101c at the porous layer 101b by the



separating apparatus 100. In this separating apparatus 100, the bonded substrate stack is set such that the substrate 101a is placed on the first substrate (10') side in Fig. 1D or 41D and the substrate 101c is placed
5 on the second substrate (10" + 20) side in Fig. 1D or 41D.

The substrate holding portions 120 and 150 are present on the same rotary axis. The substrate holding portion 120 is coupled to one end of a rotary shaft 104
10 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate stack 101 vacuum-chucked by the
15 substrate holding portion 120. In separating the bonded substrate stack 101, the motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 150 is coupled to one
20 end of a rotary shaft 103 which is rotatably and slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the
25 rotary shaft 103, the bonded substrate stack 101 is pressed by the substrate holding portion 150.

THIS SHEET HAS BEEN
REPLACED



The substrate holding portions 120 and 150 can be detached from the rotary shafts 104 and 103, respectively. The substrate holding portions 120 and 150 have one or a plurality of suction holes 181 and 182 as vacuum chuck mechanism, respectively. The suction holes 181 and 182 communicate with rotary seal portions 104a and 103a through the rotary shafts 104 and 103, respectively. The rotary seal portions 104a and 103a are coupled to vacuum lines 104b and 103b, respectively.

10 These vacuum lines 104b and 103b have solenoid valves. By controlling the solenoid valves, setting/removal of the bonded substrate stack 101 can be controlled.

The substrate holding portions 120 and 150 hold the bonded substrate stack 101 such that the separation force efficiently acts on the bonded substrate stack 101 in separation processing. Specific arrangements of the substrate holding portions 120 and 150 will be described later.

Substrate separation processing using this separating apparatus 100 will be described below.

To set the bonded substrate stack 101 in the separating apparatus 100, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the chucking surfaces of the substrate holding portions 120 and 150. After the bonded substrate stack 101 is mounted on an alignment shaft 113, the air



cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 2). The alignment shaft 113 is rotatably axially supported by the support base 109 through bearings 105 and 107.

In this embodiment, the bonded substrate stack 101 is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate stack 101 may be vacuum-chucked, as a matter of course. In separation processing, the air cylinder 112 is preferably controlled to maintain a predetermined interval between the substrate holding portions 120 and 150.

A jet medium (e.g., water) is sent from a pump 114 to a nozzle 102, and processing waits until the jet ejected from the nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet into the separation region of the bonded substrate stack 101. At this time, the bonded substrate stack 101 is rotated by the motor 110. The rotary shaft 104, substrate holding portion 120, bonded substrate stack 101, substrate holding portion 150, and rotary shaft 103 integrally rotate.

When the jet is injected, a separation force due to the pressure of the jet medium continuously injected

THIS SHEET HAS BEEN
REPLACED



into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. With this processing, the bonded substrate stack 101 is
5 separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation of the motor 110 and controlling the above-described
10 electromagnetic valves, the separated substrates are vacuum-chucked by the substrate holding portions 120 and 150.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water)
15 is cut off to split the two physically separated substrates to both sides.

When the separation force is to efficiently act on the bonded substrate stack 101, the structure of the substrate holding portions 120 and 150 must be
20 optimized. In this embodiment, the separation force is efficiently used by ensuring a space in which the bonded substrate stack deflects in separation processing. Preferable arrangements of substrate holding portions will be listed below. In the following examples, the
25 substrate holding portions 120 and 150 have a symmetrical structure. However, the substrate holding

THIS SHEET HAS BEEN
REPLACED



portions 120 and 150 may have independent structures.

[First Example of Substrate Holding Portion]

Figs. 3 to 5 are views showing the arrangement of substrate holding portions according to the first example of the present invention. Fig. 3 is a perspective view, Fig. 4 is a front view, and Fig. 5 is a sectional view. Substrate holding portions 121 and 151 shown in Figs. 3 to 5 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 121 and 151 of the first example have annular contact portions 121a and 151a which come into contact with the bonded substrate stack 101. With this structure, the bonded substrate stack 101 can deflect having "nodes" at a portion sandwiched by the contact portions 121a and 151a and "antinodes" near the central and peripheral portions of the bonded substrate stack 101. In other words, the substrate holding portions 121 and 151 have a structure in which the central portion of the bonded substrate stack 101 can expand in separation processing or a structure in which the bonded substrate stack 101 can corrugate in separation processing. When the substrate holding portions 121 and 151 having this structure are employed, the separation force can efficiently act inside the bonded substrate stack 101.

This Sheet Has Been Replaced



With the use of the substrate holding portions 121 and 151, separation progresses from the side surface portion of the bonded substrate stack 101 to the vicinity of the contact portions 121a and 151a in about 5 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). In about 2 min after the start of separation processing, the bonded substrate stack 101 warps outward at its central portion to form "antinodes" and is completely separated.

10 The outer diameter of each of the contact portions 121a and 151a is preferably, e.g., 30 to 50 mm. The inner diameter of each of the contact portions 121a and 151a can be smaller than the outer diameter by, e.g., approximately 10 mm. However, for easy deflection of the 15 substrate stack to be separated, the inner diameter of each of the contact portions 121a and 151a is preferably close to the outer diameter.

Any other substrate holding portion can provide the same effect as described above as far as it allows the 20 bonded substrate stack 101 to deflect forming "nodes" and "antinodes". Figs. 6 to 9 are front views showing modifications of the substrate holding portion according to the first example. Reference numerals 122a, 152a, 123a, 153a, 124a, 154a, 125a, and 155a denote contact 25 portions at which the substrate holding portions are in contact with the bonded substrate stack 101. Figs. 6 to

THIS SHEET HAS BEEN
REPLACED

8 show examples of a contact portion having a polygonal shape with a hollow center. Fig. 9 shows an example of contact portion whose center is shifted from the center of the bonded substrate stack 101. These are examples of
5 a stripe-shaped contact portion.

[Second Example of Substrate Holding Portion]

Fig. 10 and 11 are views showing the arrangement of substrate holding portions according to the second example of the present invention. Fig. 10 is a front
10 view, and Fig. 11 is a sectional view. Substrate holding portions 126 and 156 shown in Figs. 10 and 11 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 126 of this example
15 has two annular contact portions 126a and 126b which come into contact with the bonded substrate stack 101. The substrate holding portion 156 has two annular contact portions 156a and 156b which come into contact with the bonded substrate stack 101. The substrate
20 holding portions 126 and 156 of this example are particularly suitable to process a substrate stack with a large size (e.g., 8 inches or more).

With these substrate holding portions 126 and 156, the bonded substrate stack 101 can deflect having
25 "nodes" at a circumferential portion sandwiched by the contact portions 126a and 156a and a portion sandwiched

THIS SHEET HAS BEEN
REPLACED



by the contact portions 126b and 156b, and "antinodes" near the intermediate portion between the contact portions and the peripheral portion of the bonded substrate stack 101.

5 When the substrate holding portions 126 and 156 having a structure in which the bonded substrate stack 101 deflects while corrugating or expanding near the central portion are employed, the separation force can efficiently act inside the bonded substrate stack 101.

10 With the use of the substrate holding portions 126 and 156, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the outer contact portions 126a and 156a in about 30 sec after the start of jet injection into the bonded
15 substrate stack 101 (separation processing). In about 30 sec after this, the bonded substrate stack 101 is separated to the outer contact portions 126b and 156b. In about 3 min after the start of separation processing, the bonded substrate stack 101 warps to form "nodes" and
20 "antinodes" and is completely separated.

The widths of the contact portions (diameter difference) can be arbitrarily determined. However, for easy deflection of the substrate stack to be separated, the width of each contact portion is preferably small.

25 In this example, two sets of contact portions are formed. However, three or more sets of contact portions

This Sheet Has Been Replaced



may be arranged.

[Third Example of Substrate Holding Portion]

Fig. 12 is a perspective view showing the arrangement of substrate holding portions according to the third example of the present invention. Substrate holding portions 127 and 157 shown in Fig. 12 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 127 and 157 of this example have a plurality of contact portions 127a and 157a which come into contact with the bonded substrate stack 101, respectively. Stated differently, this structure has annular contact portions 121a and 151a of the first example with grooves 127b and 157b which divide the contact portions 121a and 151a, respectively.

The grooves 127b and 157b prevent the separation force from excessively acting in the vicinity of the central portion of the bonded substrate stack 101. More specifically, when the grooves 127b and 157b are formed, the jet medium injected into the central portion of the bonded substrate stack 101 can be appropriately discharged, so the jet medium pressure can be prevented from excessively increasing near the vicinity of the central portion. Therefore, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is

THIS SHEET HAS BEEN
REPLACED



locally high and separation progresses slowly.

With the use of the substrate holding portions 127 and 157, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the contact portions 127a and 157a in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). In about 2 min after the start of separation processing, the bonded substrate stack 101 warps outward at its central portion to form "antinodes" and is completely separated.

Fig. 13 is a perspective view showing a modification of the substrate holding portions shown in Fig. 12. Substrate holding portions 128 and 158 shown in Fig. 13 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 128 of this modification has a plurality of columnar contact portions 128a forming a circle on a main body 128b. The substrate holding portion 158 has the same arrangement as that of the substrate holding portion 128. With the substrate holding portions 128 and 158 as well, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101, so the bonded substrate stack 101 can be prevented from breaking.

[Fourth Example of Substrate Holding Portion]

THIS SHEET HAS BEEN
REPLACED



Fig. 14 is a perspective view showing the arrangement of substrate holding portions according to the fourth example of the present invention. Substrate holding portions 129 and 159 shown in Fig. 14 are
5 examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 129 of this example has two types of arcuated contact portions 129a and 129c which come into contact with the bonded substrate stack
10 101. To put it differently, the structure has the annular contact portions 126a and 126b of the second example with grooves 128b and 128d which divide the contact portions 126a and 126b, respectively. The substrate holding portion 159 has the same arrangement
15 as that of the substrate holding portion 129.

With the use of the substrate holding portions 129 and 159, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the outer contact portion 129a in about 30 sec after the
20 start of jet injection into the bonded substrate stack 101 (separation processing). In about 30 sec after this, the bonded substrate stack 101 is separated to the vicinity of the inner contact portion 129c. In about 3 min after the start of separation processing, the bonded
25 substrate stack 101 is completely separated while corrugating to form "nodes" and "antinodes".

THIS SHEET HAS BEEN
REPLACED



By forming grooves 129b and 129d in the arcuated contact portions 129a and 129c, respectively (this also applies to the substrate holding portion 159), the jet medium pressure can be prevented from excessively

5 increasing inside the bonded substrate stack 101. Hence, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

10 Fig. 15 is a perspective view showing a modification of the substrate holding portions shown in Fig. 14. Substrate holding portions 130 and 160 shown in Fig. 15 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

15 The substrate holding portion 130 of this modification has a plurality of columnar contact portions 130a forming double circles on a main body 130b. The substrate holding portion 160 has the same arrangement as that of the substrate holding portion 20 130. With the substrate holding portions 130 and 160 as well, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101, so the bonded substrate stack 101 can be prevented from breaking.

25 [Fifth Example of Substrate Holding Portion]

Figs. 16 and 17 are views showing the arrangement

THIS SHEET HAS BEEN
REPLACED



of substrate holding portions according to the fifth example of the present invention. Fig. 16 is a perspective view, and Fig. 17 is a front view. Substrate holding portions 131 and 161 shown in Figs. 16 and 17 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 131 and 161 of this modification has a plurality of columnar contact portions 131a and 161a on main bodies 131b and 161b, respectively. With the substrate holding portions 131 and 161, the bonded substrate stack 101 can deflect and corrugate having "nodes" at a portion sandwiched by the contact portions 131a and 161a, so the separation force can efficiently act inside the bonded substrate stack 101. In addition, since the jet medium discharge path is ensured, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101. As a consequence, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

With the use of the substrate holding portions 131 and 161, the bonded substrate stack 101 is completely separated in about 2 min after the start of jet injection into the bonded substrate stack 101 (separation processing).

This Sheet Has Been Replaced



[Sixth Example of Substrate Holding Portion]

Figs. 18 and 19 are views showing the arrangement of substrate holding portions according to the sixth example of the present invention. Fig. 18 is a perspective view, and Fig. 19 is a front view. Substrate holding portions 132 and 162 shown in Figs. 18 and 19 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 132 and 162 of this example have cross-shaped (radial) contact portions 132a and 162a which come into contact with the bonded substrate stack 101, on main bodies 132b and 162b, respectively. With the substrate holding portions 132 and 162, the bonded substrate stack 101 can deflect and corrugate forming "nodes" at a portion sandwiched by the contact portions 132a and 162a, so the separation force efficiently acts on the bonded substrate stack 101. In addition, since the jet medium discharge path is ensured, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101. Therefore, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

With the use of the substrate holding portions 132 and 162, the bonded substrate stack 101 is completely

THIS SHEET HAS BEEN
REPLACED



separated in about 80 sec after the start of jet injection into the bonded substrate stack 101 (separation processing).

Figs. 20 to 24 are perspective views showing modifications of the substrate holding portions shown in Fig. 19. These substrate holding portions are examples of the substrate holding portions 120 and 150 shown in Fig. 2.

Substrate holding portions 133 and 163 shown in Fig. 20 have star-shaped contact portions 133a and 163a which come into contact with the bonded substrate stack 101, on main bodies 133b and 163b, respectively.

Substrate holding portions 134 and 164 shown in Fig. 21 also have star-shaped contact portions 134a and 164a which come into contact with the bonded substrate stack 101, on main bodies 134b and 164b, respectively.

Substrate holding portions 135 and 165 shown in Fig. 22 have, on main bodies 135b and 165b, contact portions 135a and 165a which come into contact with the bonded substrate stack 101, respectively. Each of the contact portions 135a and 165a is separated into four parts at its central portion and form a cross. A substrate holding portion 136 shown in Fig. 23 has columnar contact portions 136a which come into contact with the bonded substrate stack 101, on a main body 136b. A substrate holding portion 166 has the same arrangement



as that of the substrate holding portion 136. Substrate holding portions 137 and 167 shown in Fig. 24 have radial contact portions 137a and 167a which come into contact with the bonded substrate stack 101, on main bodies 137b and 167b, respectively.

[Seventh Example of Substrate Holding Portion]

Figs. 25 and 26 are sectional views showing the arrangement of substrate holding portions according to the seventh example of the present invention. Fig. 25 shows a state before the bonded substrate stack 101 is separated. Fig. 26 shows a state after the bonded substrate stack 101 is separated. Substrate holding portions 138 and 168 shown in Figs. 25 and 26 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 138 and 168 of this example have, as contact portions to the bonded substrate stack 101, contact portions 138a and 168a which come into contact with the peripheral portions of the bonded substrate stack 101, respectively. With the substrate holding portions 138 and 168, the bonded substrate stack 101 can deflect while expanding at its central portion having "nodes" at a portion sandwiched by the contact portions 138a and 168a and "antinodes" near the central portion of the bonded substrate stack 101, so the separation force can efficiently act on the

This Sheet Has Been Replaced



bonded substrate stack 101.

The substrate holding portions 138 and 168 have, at their central portions, limit portions 137b and 167b for limiting the deflection amount of the bonded substrate stack 101. Since the deflection amounts of the separated substrates are limited by the limit portions 137b and 167b, the substrates can be prevented from breaking.

In the first to sixth examples, the surface of the main body of each substrate holding portion can also function as a deflection amount limit portion. In each example, the projection height of the contact portion to the bonded substrate stack is determined in accordance with the diameter and thickness of the bonded substrate stack and the jet medium pressure.

The above separating apparatus can be used to separate not only a semiconductor substrate such as a bonded substrate stack but also various samples.

According to the preferred embodiment of the present invention, the efficiency of separation processing can be increased while preventing damages to the sample to be separated.

In addition, according to the preferred embodiment of the present invention, a satisfactory substrate can be manufactured.

[Second Embodiment]

Fig. 28 is a view showing the schematic arrangement

This Sheet Has Been Replaced



of a separating apparatus according to the second
embodiment of the present invention. In a separating
apparatus 1000, the separation force is efficiently
applied to a bonded substrate stack to separate the
5 bonded substrate stack using a low-pressure jet. At the
same time, the bonded substrate stack is supported to
prevent the bonded substrate stack from breaking due to
the separation force. More specifically, the separating
apparatus 1000 supports the bonded substrate stack while
10 allowing it to warp due to the pressure of the jet
medium injected into the bonded substrate stack, and
also limiting the warp amount.

The separating apparatus 1000 has substrate holding
portions 1120 and 1150 having vacuum chuck mechanisms. A
15 bonded substrate stack 101 is sandwiched by the
substrate holding portions 1120 and 1150 and held. The
bonded substrate stack 101 has a porous layer 101b as an
internal fragile structure and is separated into two
substrates 101a and 101c at the porous layer 101b by the
20 separating apparatus 1000. In this separating apparatus
1000, the bonded substrate stack is set such that the
substrate 101a is placed on the first substrate (10')
side in Fig. 1D or 41D and the substrate 101c is placed
on the second substrate (10" + 20) side in Fig. 1D or
25 41D.

The substrate holding portions 1120 and 1150 are

THIS SHEET HAS BEEN
REPLACED



present on the same rotary axis. The substrate holding portion 1120 is coupled to one end of a rotary shaft 104 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate stack 101 vacuum-chucked by the substrate holding portion 1120. In separating the bonded substrate stack 101, the motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 1150 is coupled to one end of a rotary shaft 103 which is rotatably and slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the rotary shaft 103, the bonded substrate stack 101 is pressed by the substrate holding portion 1150.

The substrate holding portions 1120 and 1150 can be detached from the rotary shafts 104 and 103, respectively. The substrate holding portions 1120 and 1150 have one or a plurality of suction portions (e.g., annular grooves) 1181 and 1182 as vacuum chuck mechanisms, respectively. The suction portions 1181 and 1182 communicate with rotary seal portions 104a and 103a



through the rotary shafts 104 and 103, respectively. The rotary seal portions 104a and 103a are coupled to vacuum lines 104b and 103b, respectively. These vacuum lines 104b and 103b have solenoid valves. By controlling the solenoid valves, setting/removal of the bonded substrate stack 101 can be controlled.

The substrate holding portions 1120 and 1150 hold the bonded substrate stack 101 such that the separation force efficiently acts on the bonded substrate stack 101 in separation processing. Specific arrangements of the substrate holding portions 1120 and 1150 will be described later.

Substrate separation processing using this separating apparatus 1000 will be described below.

To set the bonded substrate stack 101 in the separating apparatus 1000, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the chucking surfaces of the substrate holding portions 1120 and 1150. After the bonded substrate stack 101 is mounted on an alignment shaft 113, the air cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 28). The alignment shaft 113 is rotatably axially supported by the support base 109 through bearings 105 and 107.

In this embodiment, the bonded substrate stack 101

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced


is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate stack 101 may be vacuum-chucked, as a matter of course.

5 In separation processing, the air cylinder 112 is preferably controlled to maintain a predetermined interval between the substrate holding portions 1120 and 1150.

A jet medium (e.g., water) is sent from a pump 114
10 to a nozzle 102, and processing waits until the jet ejected from the nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet into the separation region of the bonded substrate stack 101. At this time, the bonded substrate stack 101 is
15 rotated by the motor 110. The rotary shaft 104, substrate holding portion 1120, bonded substrate stack 101, substrate holding portion 1150, and rotary shaft 103 integrally rotate.

When the jet is injected, a separation force due to
20 the pressure of the jet medium continuously injected into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. With this processing, the bonded substrate stack 101 is
25 separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated

This Sheet Has Been Replaced



into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation of the motor 110 and controlling the above-described electromagnetic valves, the separated substrates are
5 vacuum-chucked by the substrate holding portions 1120 and 1150.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water) is cut off to split the two physically separated
10 substrates to both sides.

When the separation force is to efficiently act on the bonded substrate stack 101 while preventing the bonded substrate stack 101 from breaking, the structure of the substrate holding portions 1120 and 1150 must be
15 optimized. In this embodiment, the separation force is efficiently applied by ensuring a space in which the bonded substrate stack warps in separation processing, and simultaneously, the warp amount is limited to prevent the bonded substrate stack 101 from breaking.

20 Preferable arrangements of the substrate holding portions will be listed below. In the following examples, a pair of substrate holding portions that oppose each other have a symmetrical structure. However, the substrate holding portions may have independent
25 structures.

[First Example of Substrate Holding Portion]

THIS SHEET HAS BEEN
REPLACED



Figs. 29 to 31 are views showing the arrangement of the substrate holding portions 1120 and 1150 according to the first example of the second embodiment of the present invention. Fig. 29 is a perspective view, Fig. 30 is a sectional view showing a state before separation processing, and Fig. 31 is a sectional view showing a state during separation processing.

The substrate holding portions 1120 and 1150 of this example have convex support surfaces 1120a and 1150a each formed from part of a spherical surface. The support surfaces 1120a and 1150a support the bonded substrate stack 101 while allowing it to warp and also limit excessive warp of the bonded substrate stack 101 in separation processing. A warp amount h is preferably set to be around 0.1 to 0.5 mm.

With the use of the separating apparatus 1000 having the substrate holding portions 1120 and 1150, separation progress from the side surface of the bonded substrate stack 101 to the vicinity of the center of the support surfaces 1120a and 1150a in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). Two portions separated from the bonded substrate stack 101 are pressed against the support surfaces 1120a and 1150a by the pressure (separation force) of the jet medium injected into the bonded substrate stack 101, as shown

THIS SHEET HAS BEEN
REPLACED



in Fig. 31. As separation processing further progresses, the bonded substrate stack 101 is completely separated in about 2 min after the start of separation processing.

When the bonded substrate stack 101 is held as it
5 is capable of warping, the separation force can be efficiently applied, so separation processing can be efficiently performed. In addition, when the warp amount of the bonded substrate stack 101 is limited, the separated substrates can be prevented from excessively
10 warping, and the bonded substrate stack 101 can be prevented from breaking.

To distribute stress acting on the bonded substrate stack 101, the support surfaces 1120a and 1150a are preferably spherical. However, the contact surfaces need
15 not always be spherical. As a modification of the substrate holding portions 1120 and 1150 of the first example, substrate holding portions each having a smooth convex surface will be described.

Figs. 32 to 35 are sectional views showing
20 modifications of the substrate holding portions 1120 and 1150. Substrate holding portions 1121 and 1151 shown in Fig. 32 have support surfaces 1121a and 1151a each made of a cone having a convex vertex. Substrate holding portions 1122 and 1152 shown in Fig. 33 have support
25 surfaces 1122a and 1152a each made of a frustum of a cone. Substrate holding portions 1123 and 1153 shown in

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced


Fig. 34 have support surfaces 1123a and 1153a each made of several frustums forming a convex surface as a whole. Substrate holding portions 1124 and 1154 shown in Fig. 35 have support surfaces 1124a and 1154a each made of
5 several columns forming a convex surface as a whole.

As shown in Figs. 29 to 35, the substrate holding portion preferably has a diameter with which it can support the entire surface of the bonded substrate stack 101. When the diameter of the substrate holding portion
10 is 2/1 that of the bonded substrate stack 101 or more, a satisfactory effect can be obtained. However, the present invention does not exclude a substrate holding portion having a diameter smaller than 1/2 that of the bonded substrate stack.

15 The substrate holding portion preferably has a disk shape. However, any other shape such as a radial or matrix shape may be used.

[Second Example of Substrate Holding Portion]

Figs. 36 and 37 are sectional views showing the
20 arrangement of substrate holding portions according to the second example of the second embodiment of the present invention. Fig. 36 shows a state before separation processing. Fig. 37 shows a state during separation processing. Substrate holding portions 1125
25 and 1155 shown in Figs. 36 and 37 replace the substrate holding portions 1120 and 1150 shown in Fig. 28,

THIS SHEET HAS BEEN
REPLACED



respectively.

In the substrate holding portions 1125 and 1155 of this example, disk-like support portions 1125b and 1155b of an elastic material (e.g., a rubber) are bonded to disk-like main bodies 1125a and 1155a, respectively. The support portions 1125b and 1155b support the bonded substrate stack 101 while allowing it to warp and also limit excessive warp of the bonded substrate stack 101 in separation processing. The warp amount h is preferably set to be around 0.1 to 0.5 mm.

With the use of the separating apparatus 1000 having the substrate holding portions 1125 and 1155, separation progress from the side surface of the bonded substrate stack 101 to the vicinity of the central portion in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). Two portions separated from the bonded substrate stack 101 open to form a V shape due to the pressure (separation force) of the jet medium injected into the bonded substrate stack 101, as shown in Fig. 37. At this time, the separation force and the drag of the support portions 1125b and 1155b balance with the warp amount of the bonded substrate stack 101. As separation processing further progresses, the bonded substrate stack 101 is completely separated in about 2 min after the start of separation processing.

This Sheet Has Been Replaced



When the bonded substrate stack 101 is held as it is capable of warping, the separation force can be efficiently applied, so separation processing can be efficiently performed. In addition, when the warp amount
5 of the bonded substrate stack 101 is limited, the separated substrates can be prevented from excessively warping, and the bonded substrate stack 101 can be prevented from breaking.

To distribute stress acting on the bonded substrate
10 stack 101, the entire surfaces of the support portions 1125b and 1155b are preferably formed from an elastic material. However, the entire surfaces of the support portions need not always be made of an elastic material. In addition, the substrate holding portion preferably
15 has a diameter with which it can support the entire surface of the bonded substrate stack 101. When the diameter of the substrate holding portion is $2/1$ that of the bonded substrate stack 101 or more, a satisfactory effect can be obtained. Modifications of the substrate
20 holding portions 1125 and 1155 of this example will be listed below.

Figs. 38 to 40 are sectional views showing modifications of the substrate holding portions 1125 and 1155. In substrate holding portions 1126 and 1156 shown
25 in Fig. 38, annular second support portions 1126b and 1156b each consisting of an elastic material (e.g., a

rubber) are fitted on disk-like first support portions 1126a and 1156a each having a convex section. In substrate holding portions 1127 and 1157 shown in Fig. 39, O-ring-like second support portions 1127b and 1157b
5 each consisting of an elastic material (e.g., a rubber) are fitted on disk-like first support portions 1127a and 1157a each having a convex section. In substrate holding portions 1128 and 1158 shown in Fig. 40, coil springs 1128b and 1158b each having one end coupled to a
10 corresponding one of main bodies 1128a and 1158a are fitted on the main bodies 1128a and 1158a each having a convex section, and annular support portions 1128c and 1158c each coupled to the other end of a corresponding one of the coil springs 1128b and 1158b are also fitted
15 on the main bodies 1128a and 1158a.

The above separating apparatus can be used to separate not only a semiconductor substrate such as a bonded substrate stack but also various samples.

According to the preferred embodiment of the
20 present invention, the efficiency of separation processing can be increased while preventing damages to the sample to be separated.

In addition, according to the preferred embodiment of the present invention, a satisfactory substrate can
25 be manufactured.

[Third Embodiment]

This Sheet Has Been Replaced



When this separating apparatus is to be applied to manufacture a semiconductor substrate such as the above-described SOI substrate, pure water or ultrapure water with minimum impurity metals or particles is preferably used as a jet medium. However, if the substrate is to be cleaned after separation, water having low purity may be used as a jet medium.

The jet medium is not limited to water. It is possible to use an organic solvent such as an alcohol, an acid such as fluoric acid or nitric acid, an alkali such as potassium hydroxide, a gas such as air, nitrogen gas, carbonic acid gas, rare gas, or an etching gas, or a plasma.

In this separating apparatus, a jet is ejected to the porous layer (separation region) exposed to the side surface of the bonded substrate stack, thereby removing the porous layer from the peripheral portion to the central portion. With this process, the bonded substrate stack is separated into two substrates by removing only the separation region with low mechanical strength without damaging the main body. Even when the side surface of the bonded substrate stack is covered with some thin layer, and the porous layer is not exposed, the thin layer can be removed by the jet, so the bonded substrate stack can be separated by the above-described method.

This Sheet Has Been Replaced



At the outer peripheral portion of the bonded substrate stack, a V-shaped (concave) groove is preferably formed along the side surface. Figs. 27A and 27B are views showing a force acting on the bonded substrate stack. Fig. 27A shows a bonded substrate stack having a V-shaped groove 22. Fig. 27B shows a bonded substrate stack having no V-shaped groove.

As shown in Fig. 27A, in the bonded substrate stack having the V-shaped groove 22, a force (to be referred to as a separation force hereinafter) is applied outward from the center of the bonded substrate stack, as indicated by an arrow 23. On the other hand, as shown in Fig. 27B, in the bonded substrate stack with a convex side surface, a force is applied inward from the side surface of the bonded substrate stack, as indicated by an arrow 24. In the bonded substrate stack having a convex side surface, the separation force does not act unless the side surface of a porous layer 12 as the separation region is removed by a jet 21.

Even when a thin film is formed on the side surface of the bonded substrate stack, the separation force acts on the bonded substrate stack as far as the bonded substrate stack has the V-shaped groove 22, as shown in Fig. 27A, so the thin layer can be easily broken.

To effectively use the jet, a width $W1$ of the V-shaped groove 22 is preferably equal to or larger than

THIS SHEET HAS BEEN
REPLACED



a diameter d of the jet 21. For example, assume that each of a first substrate (10) and a second substrate (20) has a thickness of about 1 mm, and the bonded substrate stack has a thickness of about 2 mm. Since the width W_1 of the V-shaped groove 22 is normally around 1 mm, the diameter of the jet is preferably 1 mm or less. Since a general water jet apparatus uses a jet with a diameter around 0.1 to 0.5 mm, such a general water jet apparatus (e.g., a water jet nozzle) can be used.

10 The nozzle for ejecting a jet can have not only a circular shape but any other shapes. For example, when a slit-like nozzle is employed to eject a jet having a long rectangular section, the jet can be efficiently injected into the separation region (inserted between
15 the two substrates).

 The jet ejection conditions are determined in accordance with the type of separation region (e.g., a porous layer) or the shape of the side surface of the bonded substrate stack. Important parameters as the jet
20 ejection conditions are the pressure applied to the jet medium, the jet scanning speed, the width or diameter of the nozzle (the nozzle diameter is almost the same as the jet diameter), the nozzle shape, the distance between the nozzle and the separation region, and the
25 flow rate of the jet medium.

 The following techniques are used to separate the

THIS SHEET HAS BEEN
REPLACED

bonded substrate stack. 1) The jet is injected into the bonding interface parallel to the bonding interface while the nozzle is scanned along the bonding interface. 2) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is scanned. 3) The jet is injected into the bonding interface parallel to the bonding interface and simultaneously scanned in a fan shape at a pivot near the nozzle. 4) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is rotated about nearly the center of the bonded substrate stack (this technique is particularly effective when the bonded substrate stack has a disk shape). The jet need not always be ejected to be perfectly parallel to the bonding interface.

The bonded substrate stack is separated not only when the pore walls break by the cutting force, i.e., the impact force of the jet colliding against the pore walls in the porous layer but also when the pore walls break by the pressure of jet medium injected into the porous layer. To prevent damages to the substrate, the separation force acting in the axial direction of the bonded substrate stack is preferably set to be several hundred gf/cm².

To separate the bonded substrate stack using only

THIS SHEET HAS BEEN
REPLACED



the cutting force of jet, the jet must be ejected at a high pressure of 1,000 kg/cm² or more. If the bonded substrate stack is separated by such a high-pressure jet, the substrate may be damaged. The thickness of the bonded substrate stack is preferably about 0.5 to 1.0 mm. However, when such a thin bonded substrate stack is to be separated by a high-pressure jet, and the porous layer locally has portions with high strength, the jet pressure (separation force) may abruptly increase to break the substrate because the discharge path of the jet medium is not ensured.

Preferably, a jet with a low pressure of approximately 500 kgf/cm² is used, and the shortage of cutting force is compensated for by the separation force. With this method, damages to the substrate can be prevented at a relatively high ratio.

However, to prevent damages to the substrate, the shape or characteristics of the member to be separated is preferably taken into consideration. For example, when the bonded substrate stack is to be separated to the first substrate (10') side and the second substrate (10" + 20) side, the bonded substrate stack holding method in separation processing is preferably optimized in consideration of the shape or characteristics (especially, the strength) of the substrates. More specifically, the first substrate (10) is formed through

THIS SHEET HAS BEEN
REPLACED



various processes (including high-temperature process) such as anodizing, formation of an epitaxial layer, and oxidation and therefore readily breaks as compared to the second substrate (20). If the substrate is used again as the first substrate (10) by removing the porous layer remaining on the surface of the first substrate after separation, the first substrate becomes thinner by about 30 μm every time an SOI substrate is manufactured. For this reason, as the number of times of reuse increases, the first substrate breaks during separation processing with higher probability.

In this embodiment, a separating apparatus is disclosed, in which the deflection amount by the separation force of the jet is made small for one of members to be separated, which has low strength and readily breaks, to prevent the member from breaking, and the deflection amount by the separation force of the jet is made large for a member which has high strength and hardly breaks to increase the efficiency of discharging the jet medium from the separation region (inside the member).

[Arrangement of Separating Apparatus]

A specific arrangement of the separating apparatus according to the third embodiment of the present invention will be described below with reference to Figs. 42 to 44.

THIS SHEET HAS BEEN
REPLACED

The separating apparatus of this embodiment is suitable to separate a bonded substrate stack having a porous layer or microcavity layer as an internal fragile structure. This separating apparatus can also be used to
5 separate another member having an internal fragile structure. In this case, the building elements of the separating apparatus must obviously be appropriately modified in accordance with the shape of the member to be separated.

10 Fig. 42 is a view schematically showing the arrangement of the separating apparatus according to the third embodiment of the present invention. Fig. 43 is a perspective view showing part of the separating apparatus shown in Fig. 42. Fig. 44 is a view
15 schematically showing separation processing.

A separating apparatus 2000 has substrate holding portions 2120 and 2130 having vacuum chuck mechanisms. A bonded substrate stack 101 is sandwiched by the substrate holding portions 2120 and 2130 and held. The
20 substrate holding portion 2120 comes into contact with the bonded substrate stack 101 in a large area. The substrate holding portion 2130 comes into contact with the bonded substrate stack 101 in a small area. With this structure, the deflection amount becomes small or
25 no deflection occurs on one side of the bonded substrate stack 101 while the deflection amount in separation



processing is made relatively large on the other side.

The bonded substrate stack 101 has a porous layer 101b as an internal fragile structure and is separated into a first substrate 101a and a second substrate 101c at the porous layer 101b by the separating apparatus 2000. The first substrate 101a corresponds to the above-described first substrate (10'), and the second substrate 101c corresponds to the above-described second substrate (10" + 20).

As described above, the first substrate 101a is formed through various processes (including high-temperature process) such as anodizing, formation of an epitaxial layer, and oxidation and therefore readily breaks as compared to the second substrate 101c. Therefore, when the first substrate 101a of the bonded substrate stack 101 is held by the substrate holding portion 2120 having a large-area holding surface, deflection of the first substrate 101a can be limited during separation processing and prevented from breaking. The second substrate 101c has a strength higher than that of the first substrate 101a and can withstand relatively large deflection. When the second substrate 101c is held by the substrate holding portion 2130 having a small-area holding surface, the substrate 101c can deflect to some extent in separation processing. With this structure, the jet medium injected



between the substrates 101a and 101c can be efficiently discharged, and consequently, separation processing can be efficiently performed.

The substrate holding portion 2120 is coupled to
5 one end of a rotary shaft 104 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate
10 stack 101. The motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 2130 is coupled to one end of a rotary shaft 103 which is rotatably and
15 slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the rotary shaft 103, the bonded substrate stack 101 is
20 pressed by the substrate holding portion 2130.

To limit the deflection amount of the first substrate 101a to an amount as small as possible, the diameter of the chucking surface of the substrate holding portion 2120 is preferably made equal to or
25 larger than the diameter of the bonded substrate stack 101, and additionally, the chucking surface is

THIS SHEET HAS BEEN
REPLACED



preferably made flat to support the entire surface of the first substrate 101a. However, the shape of the chucking surface of the substrate holding portion 2120 is not limited to this. The chucking surface may be a curved surface such as a spherical surface or have a smaller area than the bonded substrate stack 101. That is, the shape of the chucking surface of the substrate holding portion 2120 is determined in accordance with the allowable deflection amount of the first substrate 101a.

On the other hand, the shape of the chucking surface of the substrate holding portion 2130 is determined within the allowable deflection amount range of the second substrate 101c such that the deflection amount of the second substrate 101c becomes larger than that of the first substrate 101a.

The substrate holding portions 2120 and 2130 are present on the same rotary axis. The substrate holding portions 2120 and 2139 can be detached from the rotary shafts 104 and 103, respectively. The substrate holding portions 2120 and 2130 have vacuum chucking grooves on their holding surfaces. These grooves communicate with vacuum lines extending through the rotary shafts 104 and 103, respectively. These vacuum lines are coupled to external vacuum lines through, e.g., rotary vacuum joints. The external vacuum lines have solenoid valves.



By controlling the solenoid valves, setting/removal of the substrate stack can be controlled.

Substrate separation processing using this separating apparatus 2000 will be described below.

5 To set the bonded substrate stack 101 in the separating apparatus 2000, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the holding surfaces of the substrate holding portions 2120 and 2130. After the
10 bonded substrate stack 101 is mounted on an alignment shaft 113, the air cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 42). The alignment shaft 113 is rotatably axially supported through bearings 105
15 and 107.

In this embodiment, the bonded substrate stack 101 is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate
20 stack 101 may be vacuum-chucked, as a matter of course.

A jet medium (e.g., water) is sent from a pump 114 to a jet nozzle 102, and processing waits until the jet ejected from the jet nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet
25 into the separation region of the bonded substrate stack 101, and at the same time, the bonded substrate stack



101 is rotated by the motor 110. At this time, the rotary shaft 104, substrate holding portion 2120, bonded substrate stack 101, substrate holding portion 2130, and rotary shaft 103 integrally rotate. The jet nozzle 102
5 is attached to a position adjustment mechanism (e.g., an X-Y stage), so the position from which the jet is injected into the bonded substrate stack 101 can be adjusted by the position adjustment mechanism.

When the jet is injected, a separation force due to
10 the pressure of jet medium continuously injected into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. At this time, the substrates 101a and 101c deflect in the
15 allowable ranges of the substrate holding portions 2120 and 2130. In this separating apparatus 2000, the deflection amount of the substrate 101a is relatively small, and that of the substrate 101c is relatively large.

20 With this processing, the bonded substrate stack 101 is separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation
25 of the motor 110 and controlling the above-described electromagnetic valves, the separated substrates 101a

THIS SHEET HAS BEEN
REPLACED



and 101c are vacuum-chucked by the substrate holding portions 2120 and 2130.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water) is cut off to split the two physically separated substrates 101a and 101c to both sides.

Modifications of the substrate holding portion of the separating apparatus 2000 will be described next.
[First Modification]

10 In the separating apparatus of this modification, the substrate holding portions 2120 and 2130 of the separating apparatus 2000 shown in Figs. 42 to 44 are replaced with each other. Fig. 45 is a view showing the schematic arrangement of a separating apparatus 2000' of
15 this modification.

In this separating apparatus 2000', the substrate holding portion 2120 holds the first substrate 101a side of the bonded substrate stack 101, and the substrate holding portion 2130 holds the second substrate 101c.
20 That is, in the separating apparatus 2000', the bonded substrate stack 101 is held such that the second substrate 101c is positioned on the side of the rotary shaft 104 whose horizontal position is fixed.

This separating apparatus 2000' is suitable to
25 reuse the first substrate 101a after separation as the first substrate (10) by removing the porous layer 101b



remaining on the surface of the substrate 101a. The reason for this is as follows.

When the first substrate 101a is to be reused, the first substrate 101a becomes thinner in accordance with
5 the number of times of reuse. For this reason, when separation processing is to be efficiently and appropriately performed in the separating apparatus 2000 shown in Fig. 42, the jet nozzle 102 must be located immediately above the separation region of the bonded
10 substrate stack 101 for every separation processing. If the position of the jet nozzle 102 is fixed, the jet may not be injected into the center of the porous layer 101b to damage the substrates 101a and 101c.

However, in the separating apparatus 2000' of this
15 modification, as far as the bonded substrate stack 101 whose second substrate 101c has a predetermined thickness is to be processed, the positional relationship between the porous layer 101b and the jet nozzle 102 does not change even when the position of the
20 jet nozzle 102 is fixed. This is because the position of the substrate holding portion 2130 is fixed, and the second substrate 101c held by the substrate holding portion 2130 has a predetermined thickness.

[Second Modification]

25 In this modification, the structure of each substrate holding portion of the separating apparatus

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

2000 shown in Figs. 42 to 44 is modified. Fig. 46 is a view showing the schematic arrangement of the substrate holding portions of the separating apparatus of this modification. In this separating apparatus, a substrate
5 holding portion 2121 having an almost circular chucking surface holds the first substrate 101a side of the bonded substrate stack 101, and a substrate holding portion 2131 having an almost annular chucking surface holds the second substrate 101c side of the bonded
10 substrate stack 101.

The substrate holding portions 2121 and 2131 of this modification limit the deflection amounts of the first substrate 101a and that of the second substrate 101c in the allowable deflection amount ranges,
15 respectively, and increase the efficiency of separation processing while preventing damages to the substrates 101a and 101c.

Since the diameter of the substrate holding portion 2121 is smaller than the bonded substrate stack 101, the
20 first substrate 101a deflects while warping at its outer peripheral portion in separation processing. The holding surface of the substrate holding portion 2121 may be a flat surface or a curved surface such as a spherical surface. On the other hand, since the substrate holding
25 portion 2131 has an annular holding surface, the substrate 101c deflects while corrugating forming

THIS SHEET HAS BEEN
REPLACED



"nodes" near the chucking surface (701 and 702 in Fig. 46) and "antinodes" at the outer peripheral portion and central portion. When the substrate holding portions 2121 and 2131 with shapes allowing the second substrate 101c to deflect while corrugating are employed, the jet medium injected into the bonded substrate stack 101 can be efficiently discharged.

Separation processing was executed using this separating apparatus. After the jet was injected into the bonded substrate stack 101, the jet proceeded to the holding surface (701 in Fig. 46) of the substrate holding portion 2131 in about 30 sec. After this, the jet proceeded to the holding surface (702 in Fig. 46) on the opposite side after about 30 sec, and the substrate 101c deflected while corrugating, as shown in Fig. 46. The bonded substrate stack 101 was separated into two substrates in about 3 min.

In separation processing of the bonded substrate stack 101, the jet medium is hardly discharged at the central portion of bonded substrate stack. For this reason, the pressure of the jet medium readily increases, so the central portion is easily damaged as compared to the peripheral portion. Hence, when only the second substrate 101c with high strength is allowed to deflect while expanding to the substrate holding portion 2131 side at its central portion, as in the substrate



holding portions of this modification, the discharge path of the jet medium can be ensured while preventing damages to the first substrate 101a with low strength.

[Third Modification]

5 In this modification, the structures of the substrate holding portions 2120 and 2130 of the separating apparatus 2000 shown in Figs. 42 to 44 are modified. Fig. 47 is a view showing a modification of the substrate holding portion 2120 for holding the first
10 substrate side. Fig. 48 is a view showing a modification of the substrate holding portion 2130 for holding the second substrate side.

 As shown in Fig. 47, a substrate holding portion 2122 for holding the first substrate 101a side has a
15 diameter slightly smaller than that of the bonded substrate stack 101 and a flat chucking surface. Therefore, the first substrate 101a deflects while warping at its outer peripheral portion in separation processing.

20 On the other hand, as shown in Fig. 48, a substrate holding portion 2132 has a plurality of projecting chuck portions 2132a. The second substrate 101c side of the bonded substrate stack 101 is held by the tips of the plurality of chuck portions 2132a. When the second
25 substrate 101c side is held by the projecting suction portions 2132a, the substrate 101c can easily deflect,

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced


and the jet medium injected into the bonded substrate stack 101 can be efficiently discharged. To stably hold the bonded substrate stack 101, the number of projecting chuck portions 2132a is preferably three or more.

5 The present invention is not limited to the above embodiments and various changes and modifications can be made within the spirit and scope of the present invention. Therefore, to apprise the public of the scope of the present invention, the following claims are made.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




WHAT IS CLAIMED IS:

1. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

5 a jet unit for ejecting a fluid to the sample;
and

a pair of holding portions opposing each other to sandwich and hold the sample,

wherein said pair of holding portions hold the
10 sample to allow the sample to expand at a vicinity of a central portion due to a pressure of the fluid ejected from said jet unit and injected into the sample.

2. A separating apparatus for separating a plate-like sample having an internal fragile layer at
15 the fragile layer comprising:

a jet unit for ejecting a fluid to the sample;
and

a pair of holding portions opposing each other to sandwich and hold the sample,

20 wherein said pair of holding portions hold the sample which can corrugate due to a pressure of the fluid ejected from said jet unit and injected into the sample.

3. The apparatus according to claim 1 or 2, wherein
25 at least one of said pair of holding portions has a hollow contact portion, and the sample is held by

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




bringing said contact portion into contact with the sample.

4. The apparatus according to claim 3, wherein said contact portion comprises a multiple of contact portions.

5 5. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.

10 6. The apparatus according to claim 5, wherein said contact portion comprises a multiple of contact portions.

7. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing said contact portion into contact with the sample.

8. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by bringing said contact portion into contact with the sample.

9. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing said contact portion into contact with the sample.

This Sheet Has Been Replaced





10. The apparatus according to claim 1 or 2, wherein
at least one of said pair of holding portions has a
radial contact portion, and the sample is held by
bringing said contact portion into contact with the
5 sample.

11. The apparatus according to claim 1 or 2, wherein
at least one of said pair of holding portions has a
contact portion which comes into contact with a
peripheral portion of the sample, and the sample is held
10 by bringing said contact portion into contact with the
sample.

12. The apparatus according to claim 11, wherein said
contact portion can contact the whole peripheral portion
of the sample.

15 13. The apparatus according to any one of claims 1 to
12, further comprising a rotary mechanism for rotating
said holding portion about a shaft perpendicular to a
surface of the sample.

14. The apparatus according to any one of claims 1 to
20 13, further comprising an adjustment mechanism for
adjusting an interval between said pair of holding
portions.

15. The apparatus according to claim 14, wherein in
separating the sample by the fluid, said adjustment
25 mechanism presses the sample to adjust the interval
between said pair of holding portions.

This Sheet Has Been Replaced





16. The apparatus according to claim 14, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.
- 5 17. The apparatus according to any one of claims 1 to 16, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.
18. The apparatus according to any one of claims 1 to 17, wherein the sample comprises a substrate having a
10 porous layer as the fragile layer.
19. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:
- 15 a pair of holding portions opposing each other to sandwich and hold the sample,
- wherein said pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central portion due to a pressure of a fluid ejected
20 from a jet unit arranged in said separating apparatus and injected into the sample.
20. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at
25 the fragile layer comprising:
- a pair of holding portions opposing each other to

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



sandwich and hold the sample,

wherein said pair of holding portions hold the sample to allow the sample to corrugate due to a pressure of a fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample.

21. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has a hollow contact portion, and the sample is held by bringing said contact portion into contact with the sample.

22. The apparatus according to claim 21, wherein said contact portion comprises a multiple of contact portions.

23. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.

24. The apparatus according to claim 23, wherein said contact portion comprises a multiple of contact portions.

25. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing said contact portion into contact with the sample.

26. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



a plurality of arcuated contact portions, and the sample is held by bringing said contact portion into contact with the sample.

27. The apparatus according to claim 19 or 20, wherein
5 at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing said contact portion into contact with the sample.

28. The apparatus according to claim 19 or 20, wherein
10 at least one of said pair of holding portions has a radial contact portion, and the sample is held by bringing said contact portion into contact with the sample.

29. The apparatus according to claim 19 or 20, wherein
15 at least one of said pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing said contact portion into contact with the sample.

20 30. The apparatus according to claim 29, wherein said contact portion can contact the whole peripheral portion of the sample.

31. The apparatus according to any one of claims 19 to 30, further comprising a rotary mechanism for rotating
25 said holding portion about a shaft perpendicular to a surface of the sample.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



32. The apparatus according to any one of claims 19 to 31, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

5 33. The apparatus according to claim 32, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval between said pair of holding portions.

34. The apparatus according to claim 32, wherein in
10 separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.

35. The apparatus according to any one of claims 19 to 34, wherein each of said pair of holding portions has a
15 chuck mechanism for vacuum-chucking the sample.

36. The apparatus according to any one of claims 19 to 35, wherein the sample comprises a substrate having a porous layer as the fragile layer.

37. A separating method of separating a plate-like
20 sample having an internal fragile layer at the fragile layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 1 to 18;

separating the sample at the fragile layer by said
25 separating apparatus; and

receiving the separated samples from said

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced





separating apparatus.

38. The method according to claim 37, wherein water is used as the fluid to be ejected from said jet unit.

39. A separating method of separating a substrate at a
5 porous layer, the substrate being formed by bonding a non-porous layerside of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein said separating apparatus of any one of claims 1 to 18
10 is used for separation.

40. A substrate manufacturing method comprising the step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
15 layer are sequentially formed on one surface, to a second substrate; and

separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of
20 claims 1 to 18 is used in the separation step.

41. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

a jet unit for ejecting a fluid to the sample; and
25 a pair of holding portions opposing each other to sandwich and hold the sample,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts by a pressure of the fluid ejected from said jet unit and injected into the sample and simultaneously limit a
5 warp amount.

42. The apparatus according to claim 41, wherein at least one of said pair of holding portions has a smooth convex support surface, and the sample is held by said support surface.

10 43. The apparatus according to claim 42, wherein said support surface substantially comprises part of a spherical surface.

44. The apparatus according to claim 42, wherein said support surface comprises a surface formed by a cone
15 with a convex vertex.

45. The apparatus according to claim 42, wherein said support surface substantially comprises a surface formed by a frustum of a cone.

46. The apparatus according to claim 42, wherein said
20 support surface comprises a smooth convex surface formed by a stack of several frustums.

47. The apparatus according to claim 42, wherein said support surface comprises a convex surface formed by a stack of several columns.

25 48. The apparatus according to claim 41, wherein at least one of said pair of holding portions includes an

THIS SHEET HAS BEEN
REPLACED





elastic member and deforms due to a force inflicted by the sample.

49. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
5 partially consisting of an elastic material, and the sample is held by said support portion.

50. The apparatus according to claim 41, wherein at least one of said holding portions has an elastic member at a portion which can contact the sample.

10 51. The apparatus according to claim 41, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

52. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
15 coupled to a main body via an elastic member.

53. The apparatus according to any one of claims 41 to 52, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

20 54. The apparatus according to any one of claims 41 to 53, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

55. The apparatus according to claim 54, wherein in
25 separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



between said pair of holding portions.

56. The apparatus according to claim 54, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval
5 between said pair of holding portions.

57. The apparatus according to any one of claims 41 to 56, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

58. The apparatus according to any one of claims 41 to
10 57, wherein the sample comprises a substrate having a porous layer as the fragile layer.

59. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at
15 the fragile layer comprising:

a pair of holding portions for sandwiching and holding the sample,

wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts
20 by a pressure of the fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample and simultaneously limit a warp amount.

60. The apparatus according to claim 59, wherein at least one of said pair of holding portions has a smooth
25 convex support surface, and the sample is held by said support surface.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



61. The apparatus according to claim 60, wherein said support surface substantially comprises part of a spherical surface.
62. The apparatus according to claim 60, wherein said
5 support surface comprises a surface formed by a cone with a convex vertex.
63. The apparatus according to claim 60, wherein said support surface substantially comprises a surface formed by a frustum of a cone.
- 10 64. The apparatus according to claim 60, wherein said support surface comprises a smooth convex surface formed by a stack of several frustums.
65. The apparatus according to claim 60, wherein said support surface comprises a convex surface formed by a
15 stack of several columns.
66. The apparatus according to claim 59, wherein at least one of said pair of holding portions includes an elastic member and deforms due to a force inflicted by the sample.
- 20 67. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion partially consisting of an elastic material, and the sample is held by said support portion.
68. The apparatus according to claim 59, wherein at
25 least one of said holding portions has an elastic member at a portion which can contact the sample.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced





69. The apparatus according to claim 59, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

70. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion coupled to a main body via an elastic member.

71. The apparatus according to any one of claims 59 to 70, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

72. The apparatus according to any one of claims 59 to 71, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

73. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval between said pair of holding portions.

74. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.

75. The apparatus according to any one of claims 59 to 74, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

76. The apparatus according to any one of claims 59 to

THIS SHEET HAS BEEN
REPLACED





75, wherein the sample comprises a substrate having a porous layer as the fragile layer.

77. A separating method of separating a plate-like sample having an internal fragile layer at the fragile

5 layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 41 to 58;

separating the sample at the fragile layer by said separating apparatus; and

10 receiving the separated samples from said separating apparatus.

78. The method according to claim 77, wherein water is used as the fluid to be ejected from said jet unit.

79. A separating method of separating a substrate at a
15 porous layer, the substrate being formed by bonding a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein
said separating apparatus of any one of claims 41
20 to 58 is used for separation.

80. A substrate manufacturing method comprising the step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
25 layer are sequentially formed on one surface, to a second substrate; and

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced





separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of claims 41 to 58 is used in the separation step.

5 81. A separating apparatus for separating a plate-like sample comprising:

a jet unit for ejecting a fluid for separating the sample to the sample; and

first and second holding portions for sandwiching
10 and holding the sample,

wherein said first and second holding portions have holding surfaces with different shapes.

82. The apparatus according to claim 81, wherein said first holding portion holds one surface of the sample to
15 make a deflection amount of the one surface due to a pressure of the fluid injected into the sample relatively small, and said second holding portion holds the other surface of the sample to make a deflection amount of the other surface due to the pressure of the
20 fluid relatively large.

83. The apparatus according to claim 81, wherein said first holding portion holds one surface of the sample not to cause the one surface to deflect due to a pressure of the fluid injected into the sample, and said
25 second holding portion holds the other surface of the sample to cause the other surface to deflect due to the

THIS SHEET HAS BEEN
REPLACED





pressure of the fluid.

84. The apparatus according to any one of claims 81 to
83, wherein the holding surface of said first holding
portion and the holding surface of said second holding
5 portion have different areas.

85. The apparatus according to any one of claims 81 to
84, wherein said first holding portion has a holding
surface for wholly holding one surface of the sample,
and said second holding portion has a holding surface
10 for partially holding the other surface of the sample.

86. The apparatus according to any one of claims 81 to
85, wherein the holding surface of said first holding
portion comprises a flat surface.

87. The apparatus according to any one of claims 81 to
15 85, wherein the holding surface of said first holding
portion comprises a curved surface.

88. The apparatus according to any one of claims 81 to
87, wherein the holding surface of said second holding
portion is annular.

20 89. The apparatus according to any one of claims 81 to
87, wherein said second holding portion has a plurality
of projecting members, and the sample is held by tips of
said plurality of projecting members.

90. The apparatus according to any one of claims 81 to
25 87, wherein said second holding portion has a shape
allowing the sample to deflect while expanding at a

This Sheet Has Been Replaced





central portion on a side of said second holding portion due to the pressure of the fluid injected into the sample.

91. The apparatus according to any one of claims 81 to 5 87, wherein said second holding portion has a shape allowing the sample to deflect and corrugate on a side of said second holding portion due to the pressure of the fluid injected into the sample.

92. The apparatus according to any one of claims 81 to 10 91, further comprising a rotary mechanism for rotating at least one of said first and second holding portions about a shaft perpendicular to the holding surface to rotate the sample.

93. The apparatus according to any one of claims 81 to 15 92, wherein the sample to be processed comprises a substrate formed by bonding first and second substrates, and the first and second substrates have different strengths.

94. A separating method of separating a plate-like 20 sample comprising holding the sample by sandwiching the sample by a pair of holding portions having holding surfaces with different shapes, and ejecting a fluid to a predetermined position in a direction of thickness of the sample, thereby separating the sample.

25 95. The method according to claim 94, wherein the sample to be separated has an internal fragile layer,

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



and in separating the sample, the fluid is ejected to the fragile layer.

96. A separating method of separating a plate-like sample having an internal fragile layer at the fragile

5 layer comprising:

the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

wherein in the separation step, one surface of the sample is held to make a deflection amount due to a
10 pressure of the fluid injected into the sample relatively small and the other surface of the sample is held to make a deflection amount due to the pressure of the fluid injected into the sample relatively large.

97. A separating method of separating a plate-like
15 sample having an internal fragile layer at the fragile layer comprising:

the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

wherein in the separation step, one surface of the
20 sample is held to limit deflection due to a pressure of the fluid injected into the sample and the other surface of the sample is held to allow deflection due to the pressure of the fluid injected into the sample.

98. The method according to any one of claims 94 to 97,
25 further comprising rotating the sample about a shaft perpendicular to a major surface of the sample in

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




separating the sample by the fluid.

99. The method according to any one of claims 94 to 98,
wherein the sample to be processed comprises a sample
formed by bonding first and second substrates, and the
5 first and second substrates have different strengths.

100. A separating method of separating a composite
substrate which has a fragile layer between a first
substrate having a relatively low strength for
deflection and a second substrate having a relatively
10 high strength for deflection, at the fragile layer
comprising:

the separation step of ejecting a fluid to the
fragile layer to separate the composite substrate,

wherein in the separation step, the first
15 substrate is held to make a deflection amount due to a
pressure of the fluid injected into the composite
substrate relatively small and the second substrate is
held to make a deflection amount due to the pressure of
the fluid injected into the composite substrate
20 relatively large.

101. A separating method of separating a composite
substrate which has a fragile layer between a first
substrate having a relatively low strength for
deflection and a second substrate having a relatively
25 high strength for deflection, at the fragile layer
comprising:

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



the separation step of ejecting a fluid to the fragile layer to separate the composite substrate,

wherein in the separation step, the first substrate is held to limit deflection due to a pressure
5 of the fluid injected into the composite substrate and the second substrate is held to allow deflection due to the pressure of the fluid injected into the composite substrate.

102. A substrate manufacturing method comprising the
10 step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate; and

15 separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of claims 81 to 92 is used in the separation step.

103. A substrate manufacturing method comprising:

20 bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate; and

separating the bonded substrates at the porous
25 layer,

wherein the separation step is executed using the

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced





method of any one of claims 84 to 98.

104. A holding apparatus for holding a sample in
ejecting a fluid to a predetermined position in a
direction of thickness of the sample to separate the
5 sample, wherein the sample is held by a pair of holding
portions whose holding surfaces for holding the sample
have different shapes.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

ABSTRACT OF THE DISCLOSURE

This invention is to provide an apparatus for separating a substrate having a porous layer at the porous layer. A bonded substrate stack (101) having a porous layer (101b) is supported by substrate holding portions (120, 150) while being rotated. High-speed, high-pressure water (jet) is ejected from a nozzle (102), so the jet is injected into the bonded substrate stack (101). The substrate holding portions (120, 150) hold the bonded substrate stack (101) such that the bonded substrate stack (101) can expand at its central portion due to the pressure of the injected water. This efficiently applies a force (separation force) that acts outward from the inside of the bonded substrate stack (101).

This Sheet Has Been Replaced



FIG. 1A




FIG. 1B

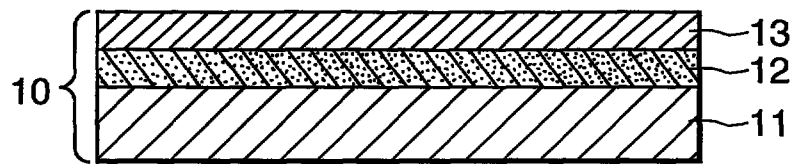


FIG. 1C

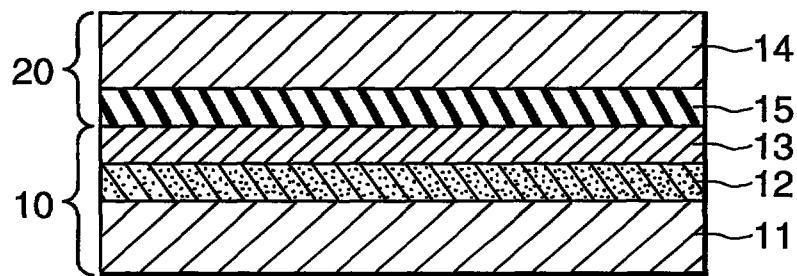


FIG. 1D

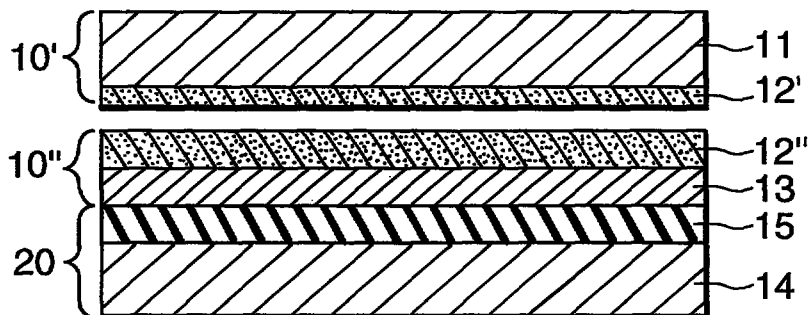


FIG. 1E

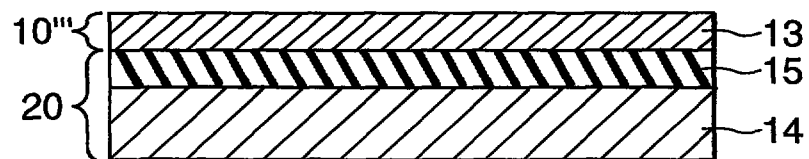


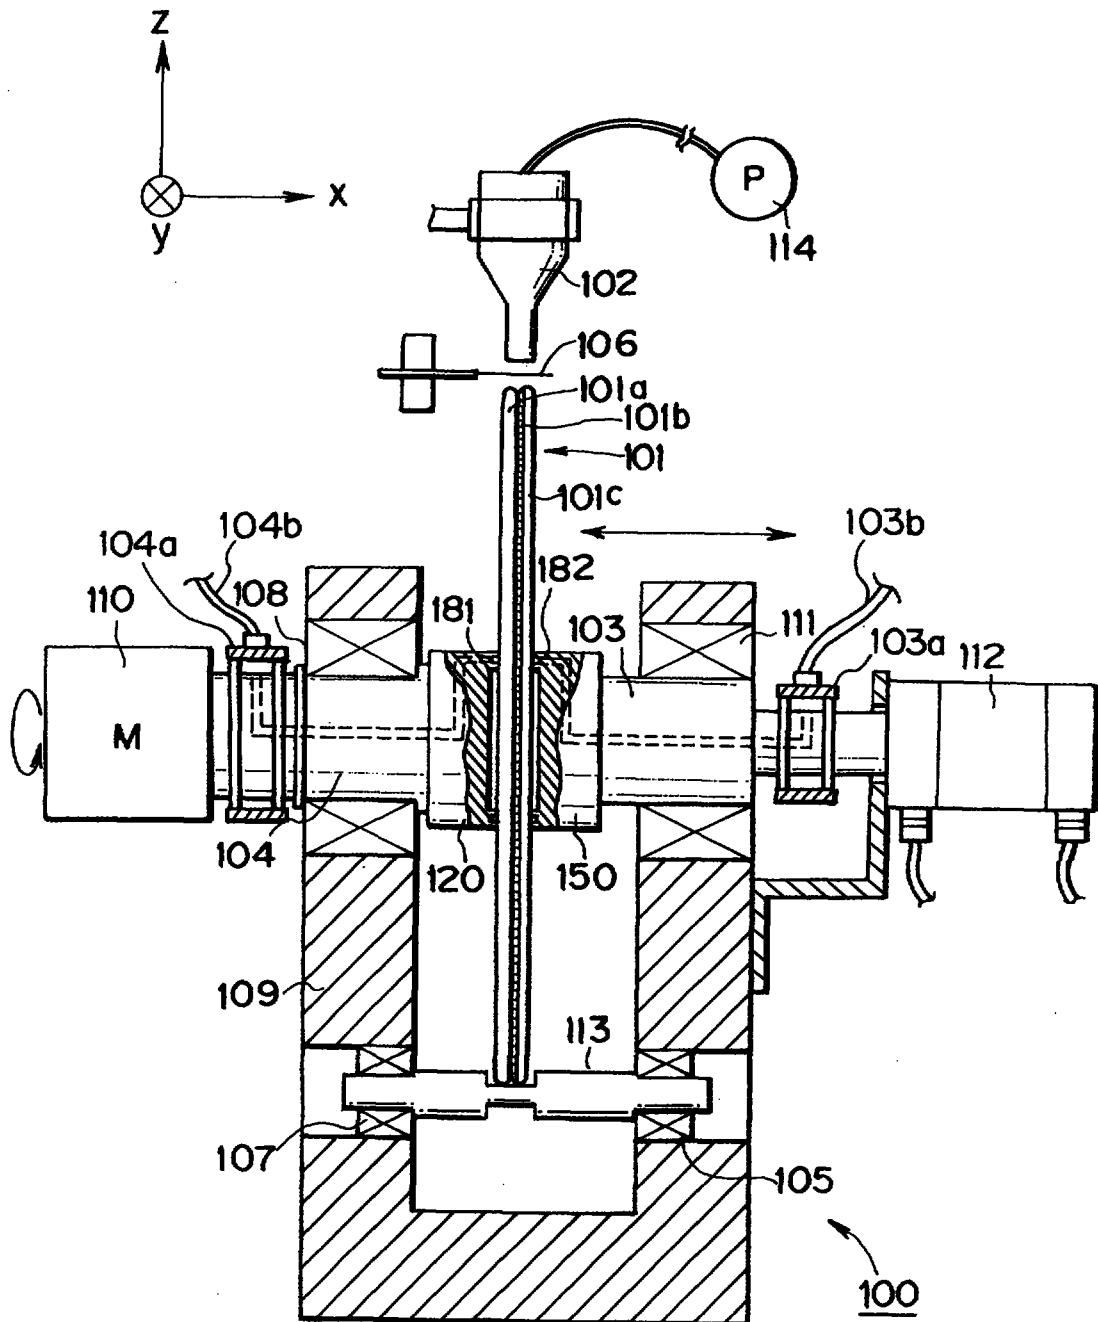
FIG. 2

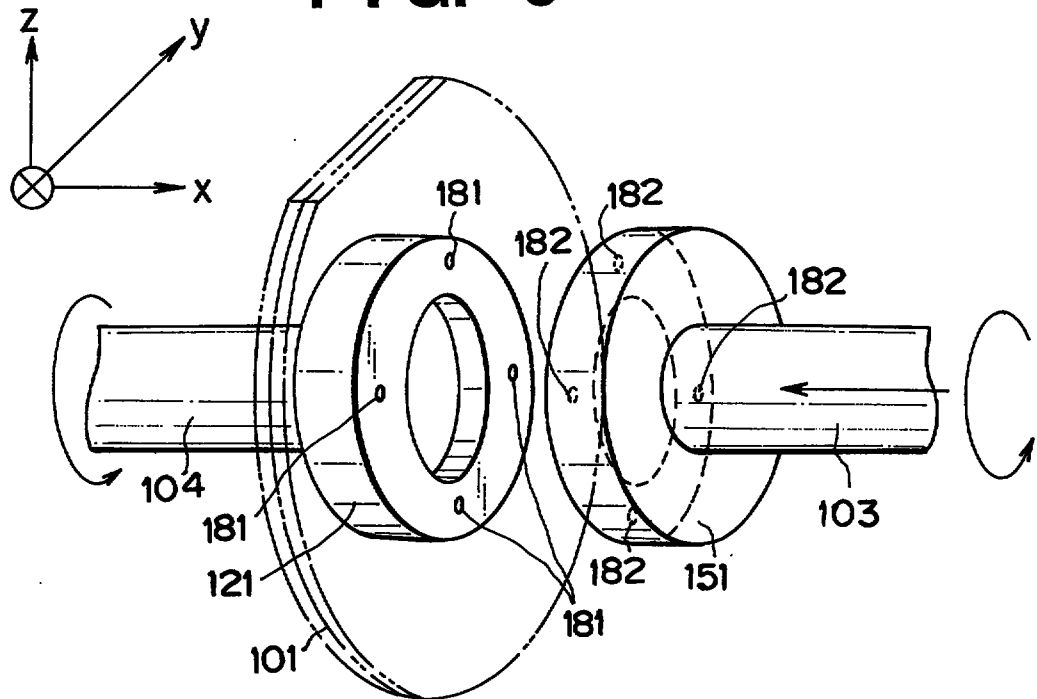
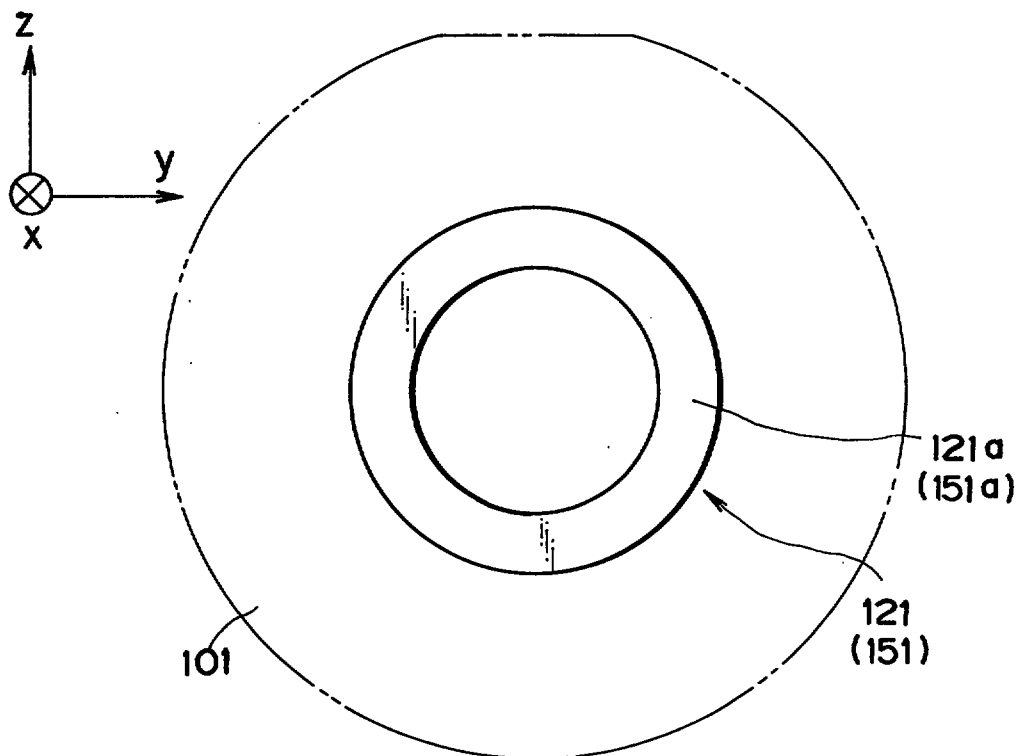
FIG. 3**FIG. 4**

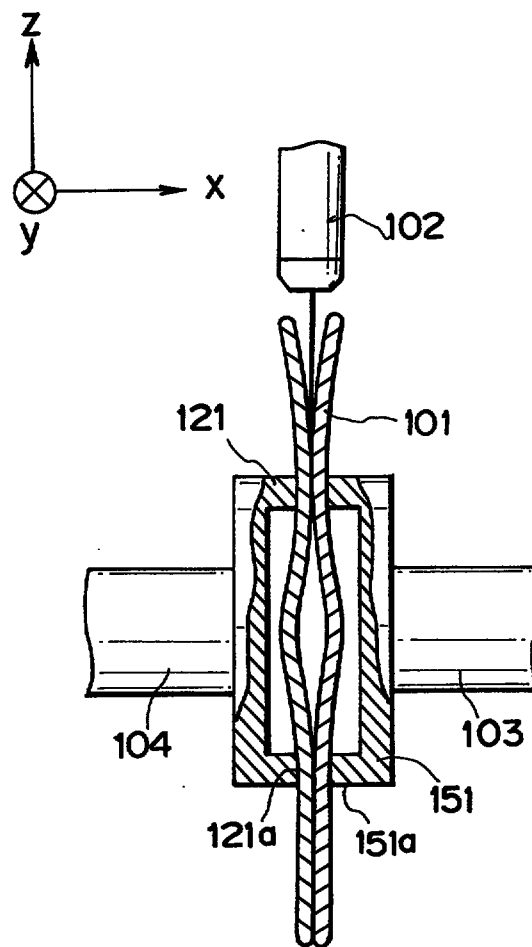
FIG. 5

FIG. 6

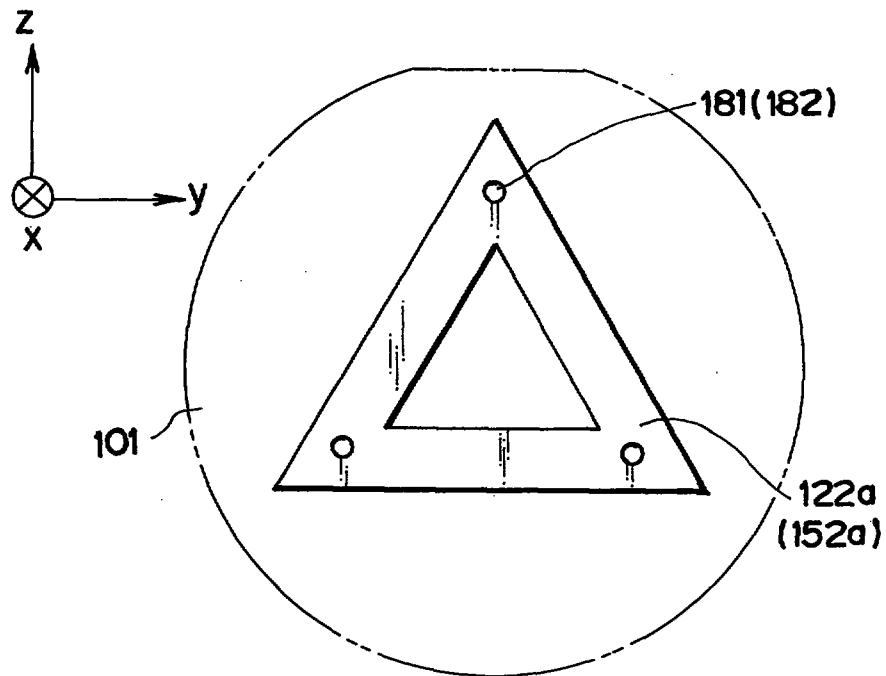


FIG. 7

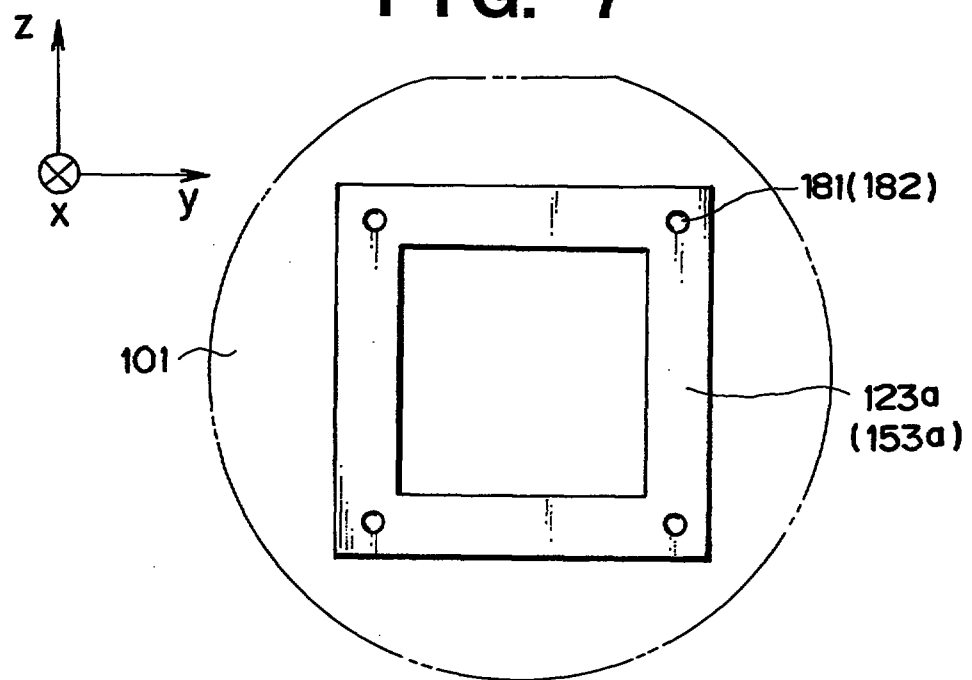


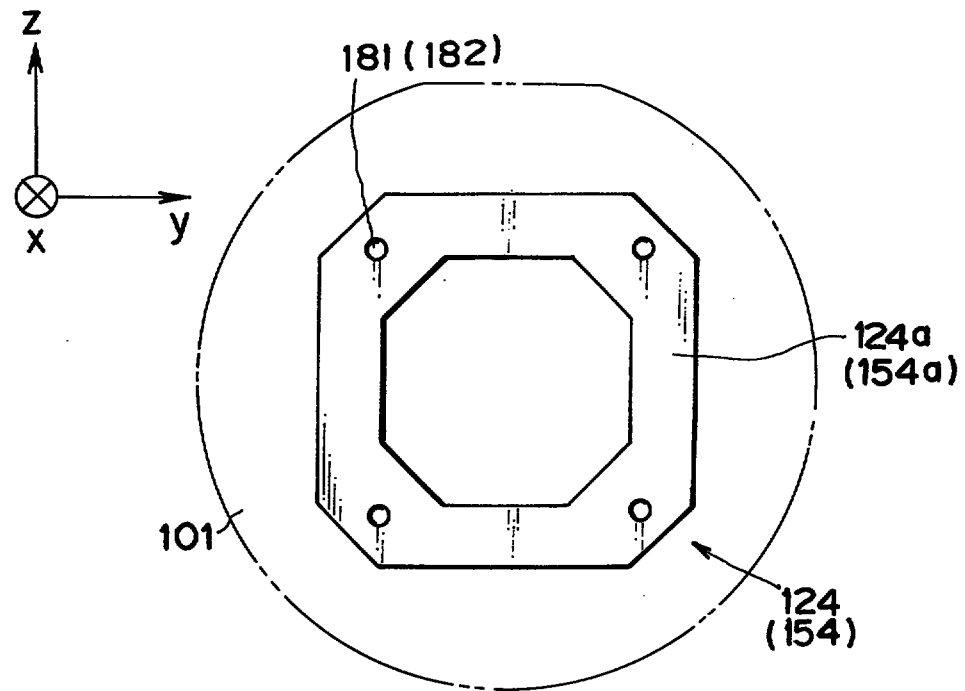
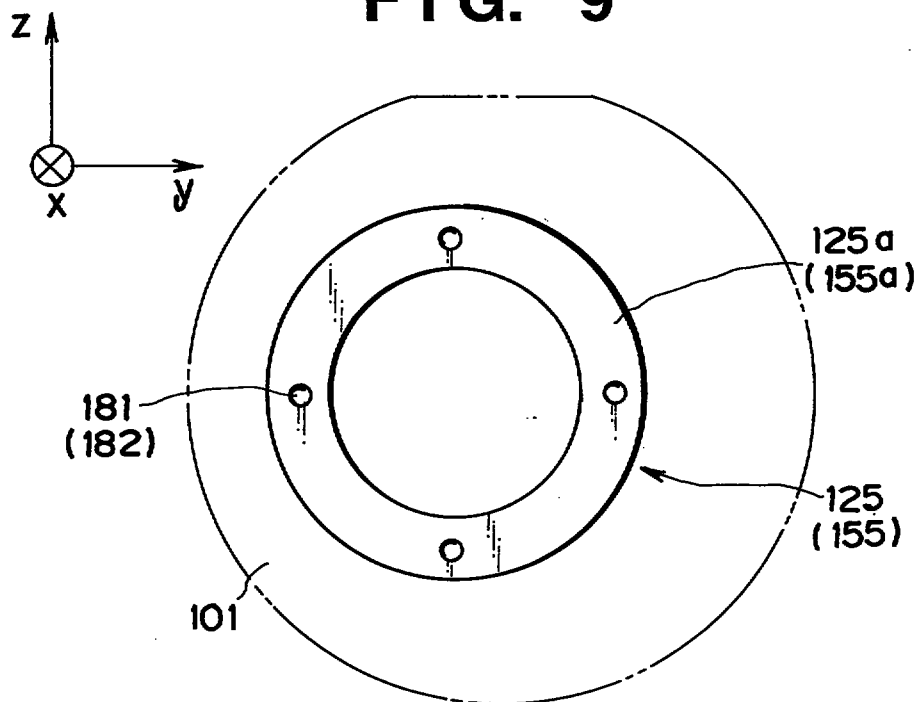
FIG. 8**FIG. 9**

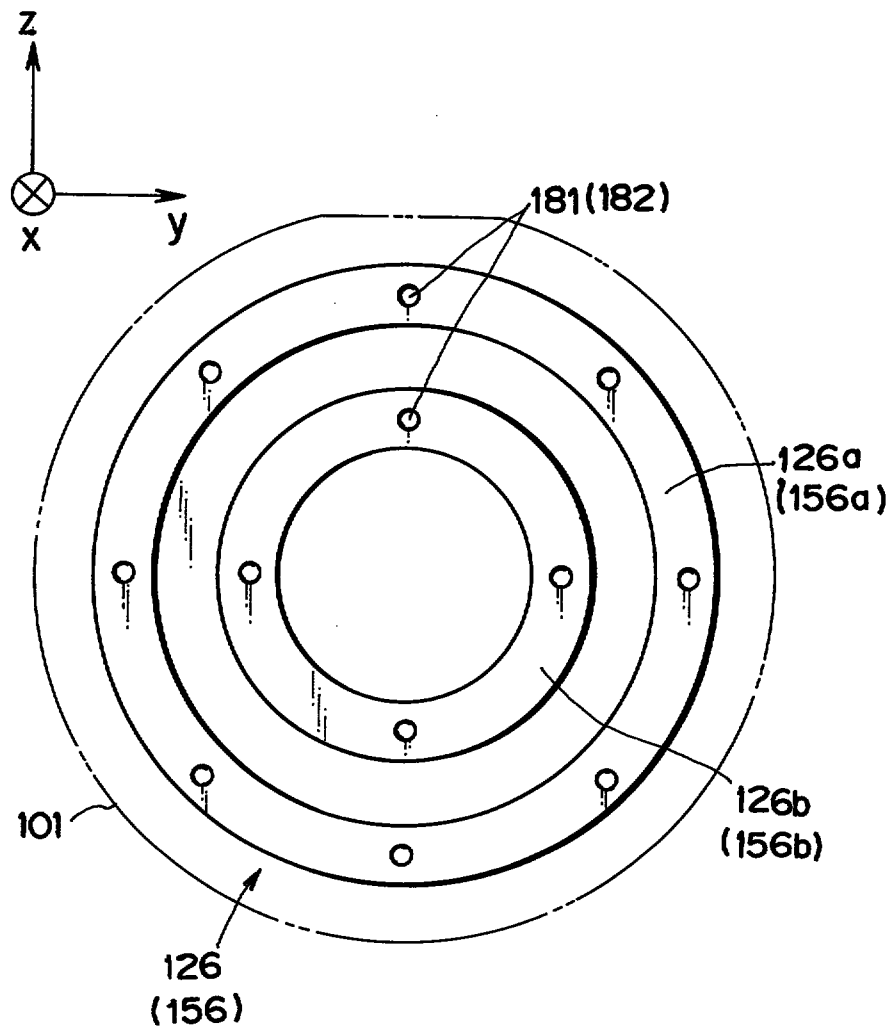
FIG. 10

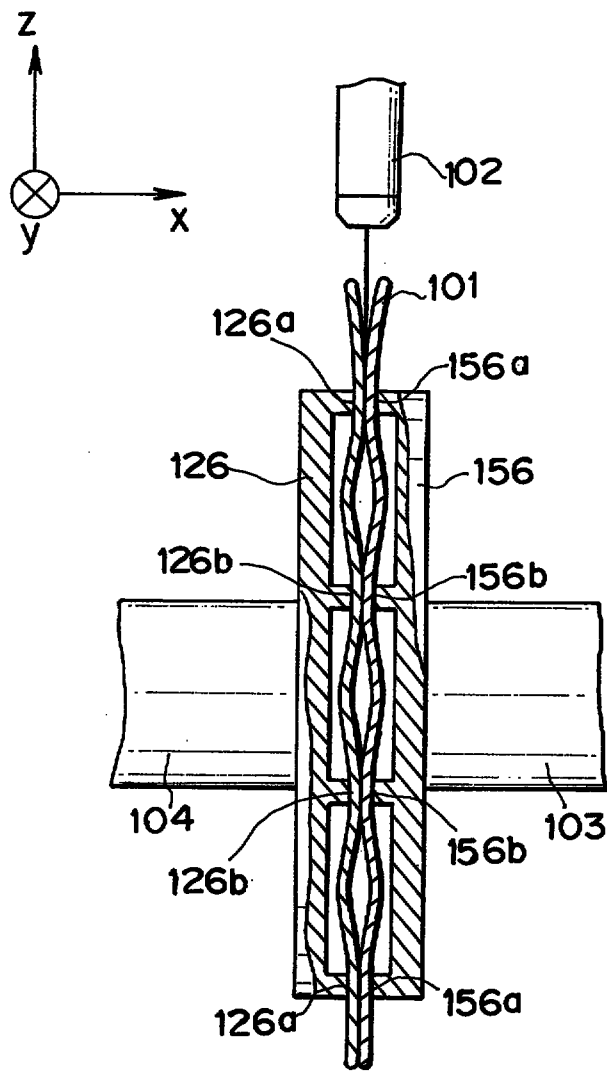
FIG. 11

FIG. 12

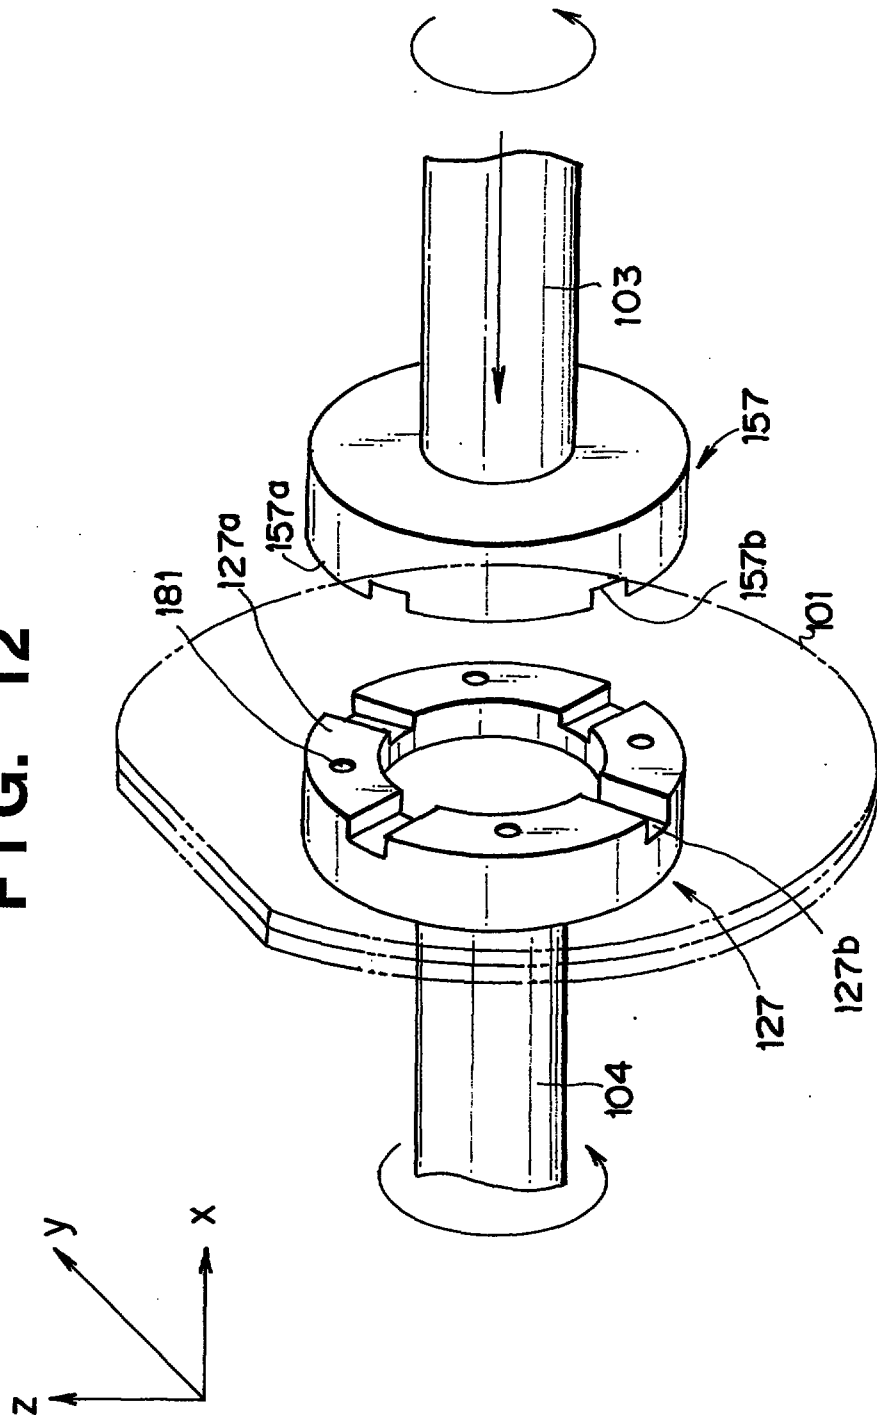


FIG. 13

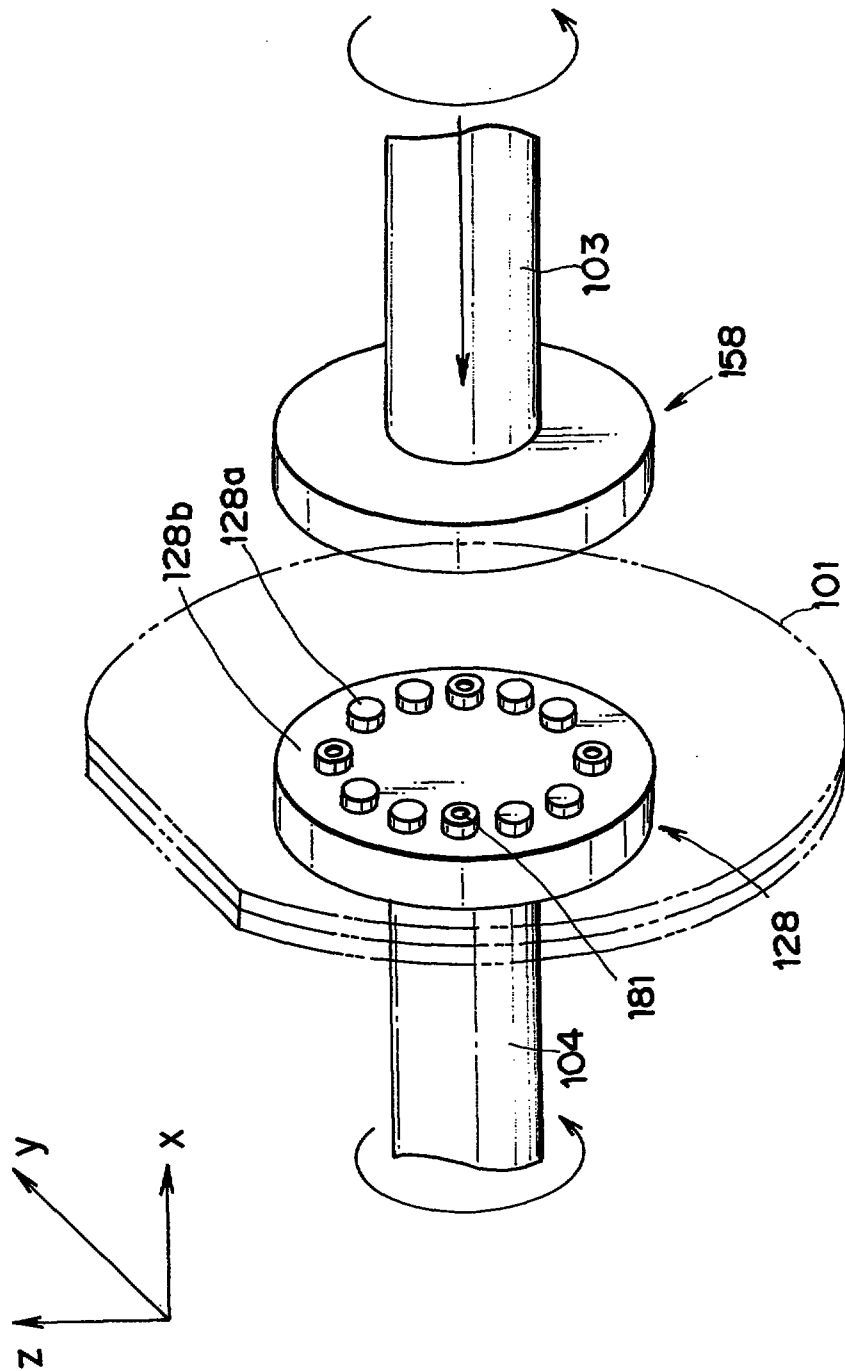


FIG. 14

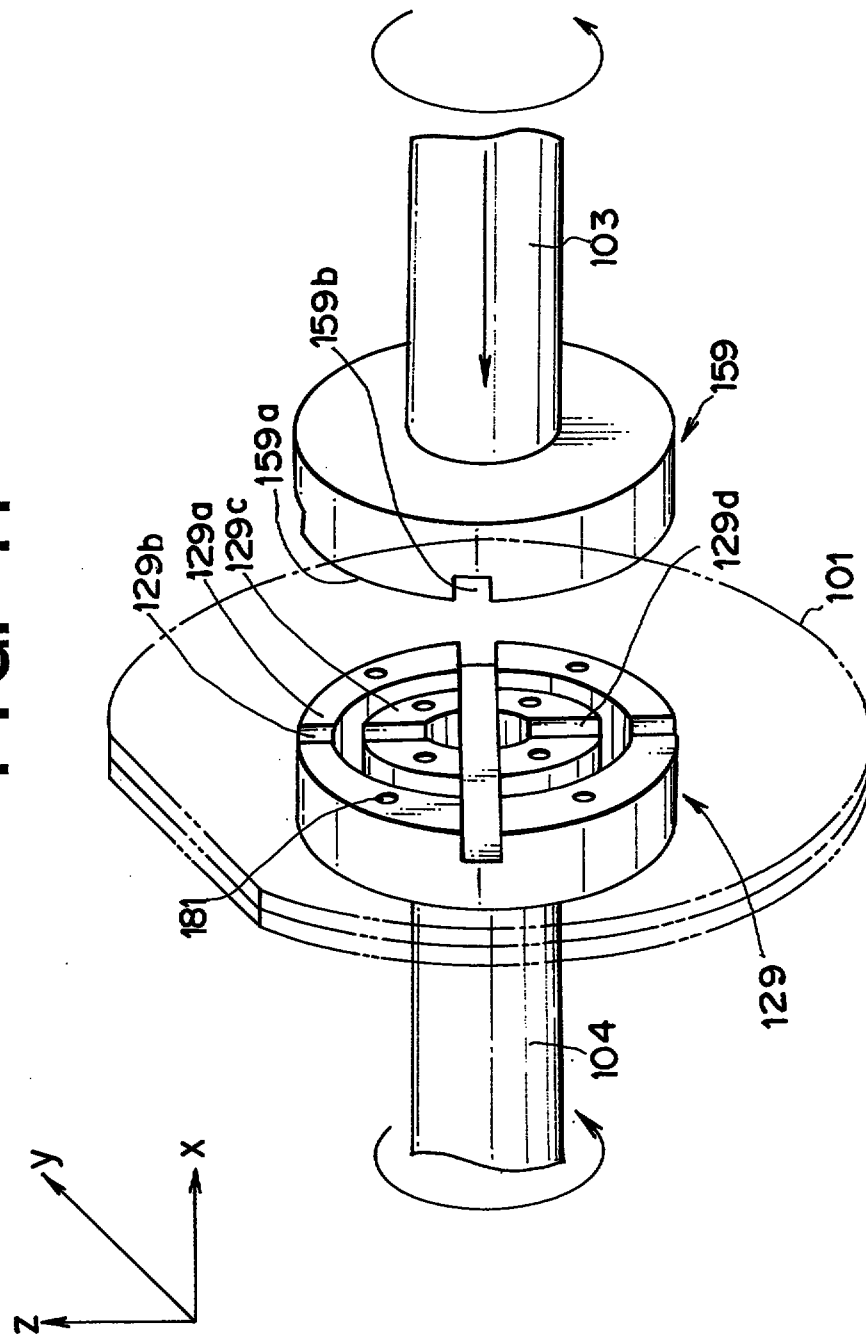


FIG. 15

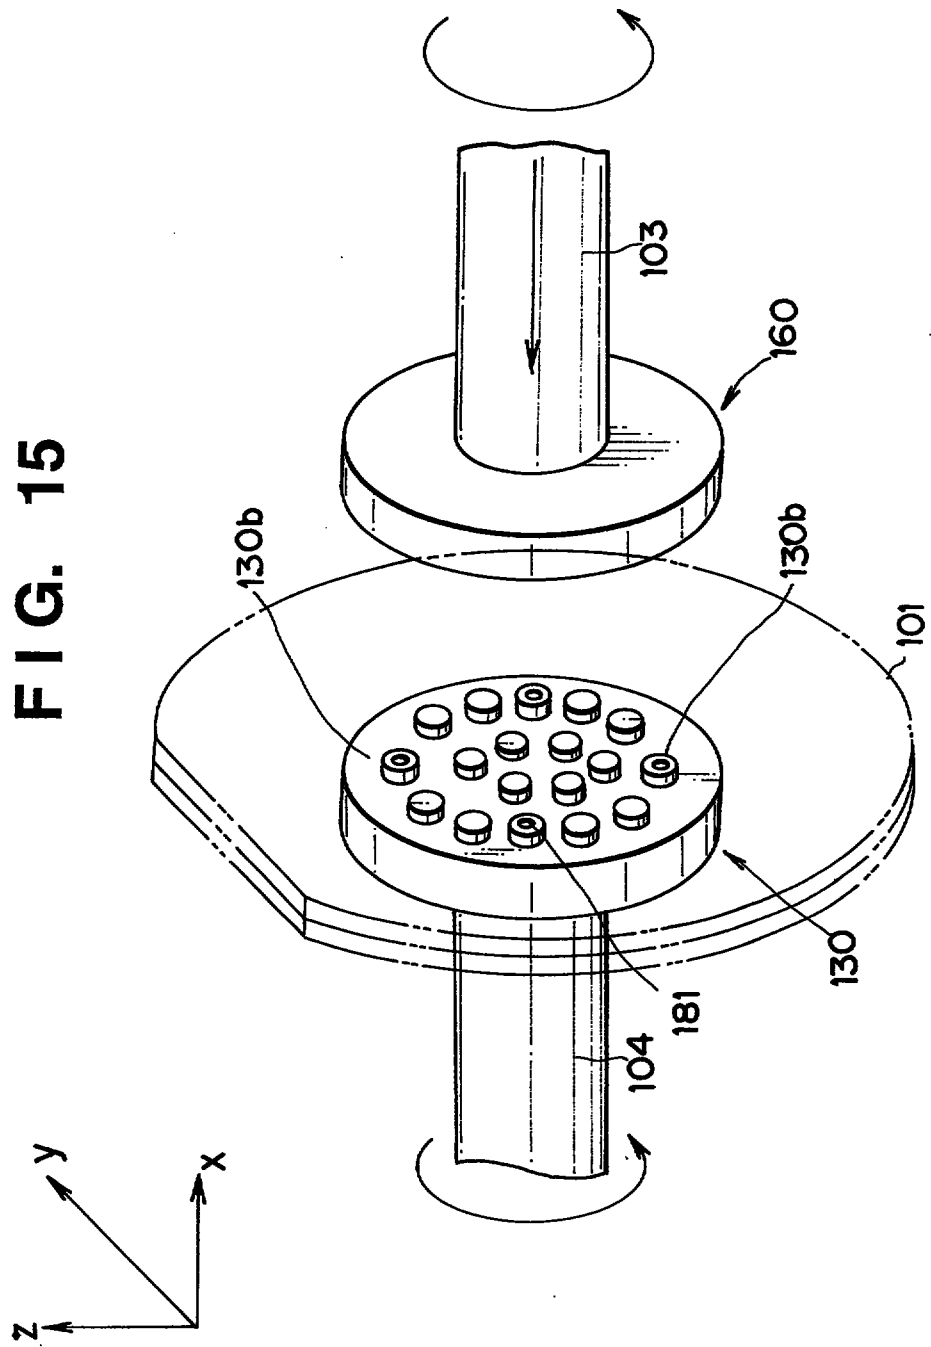


FIG. 16

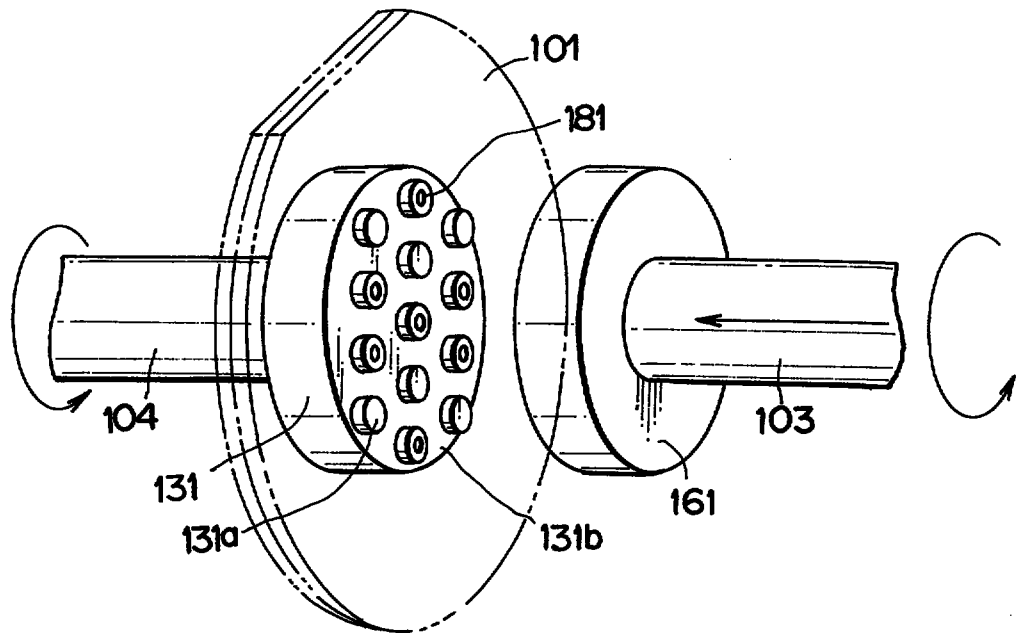


FIG. 17

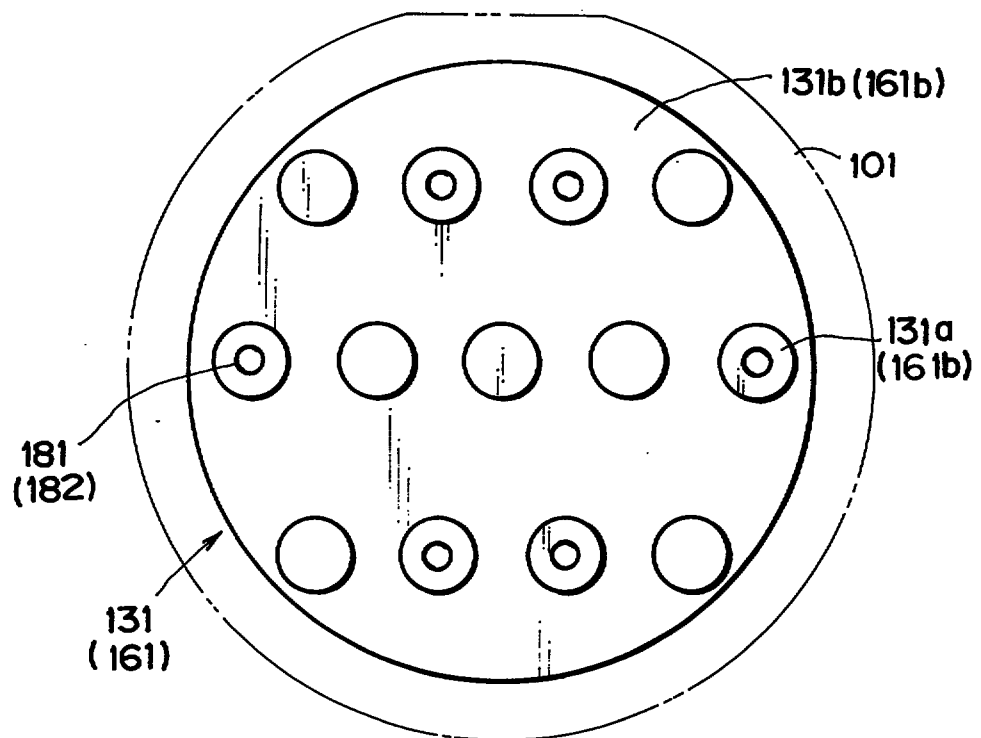


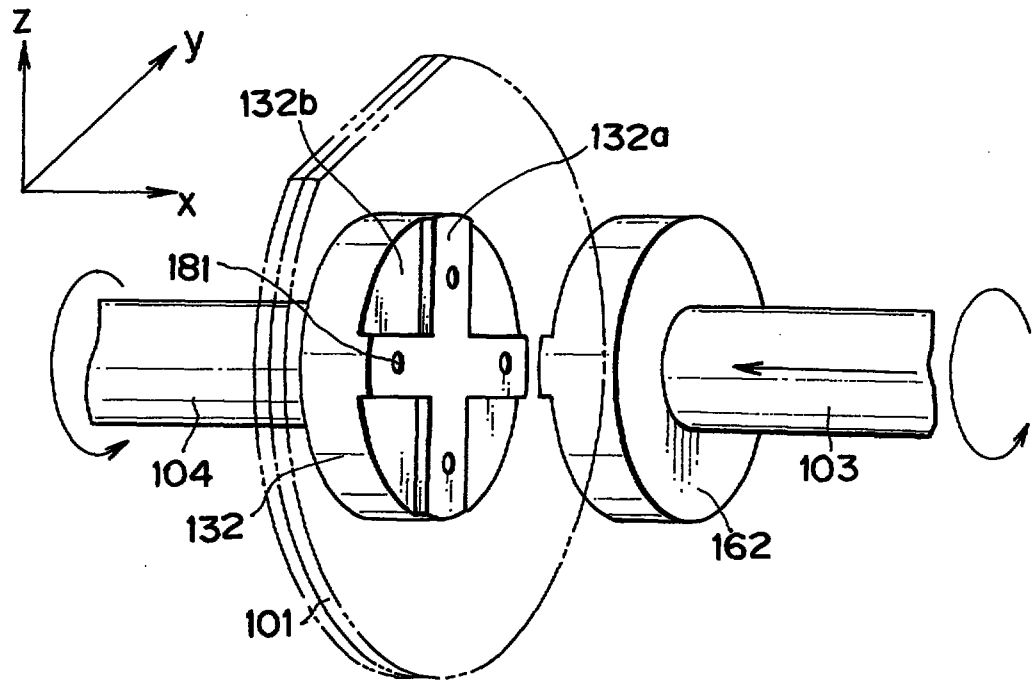
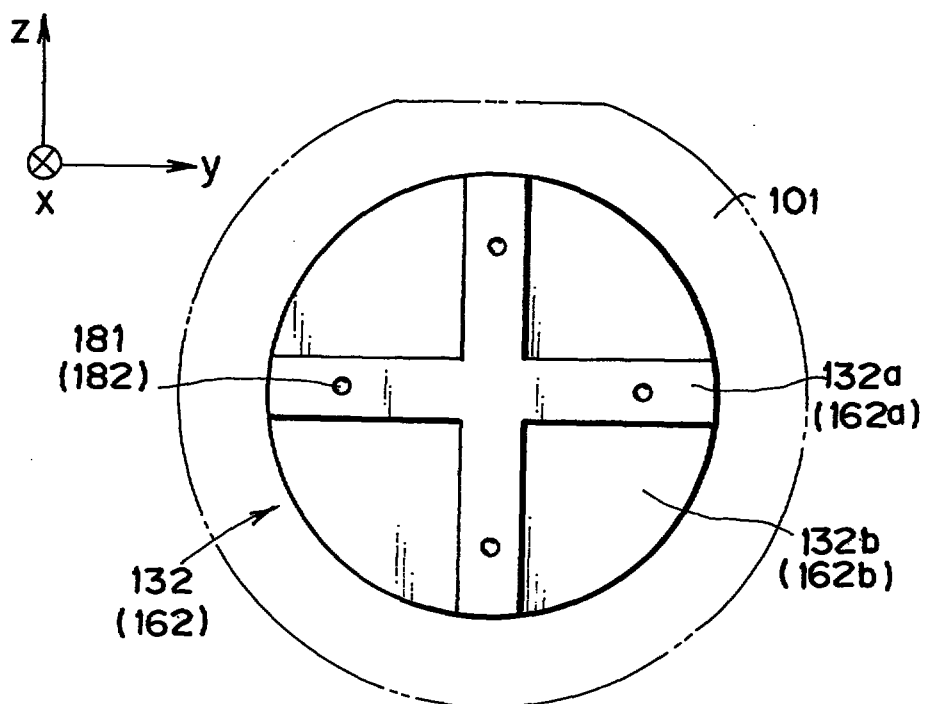
FIG. 18**FIG. 19**

FIG. 20

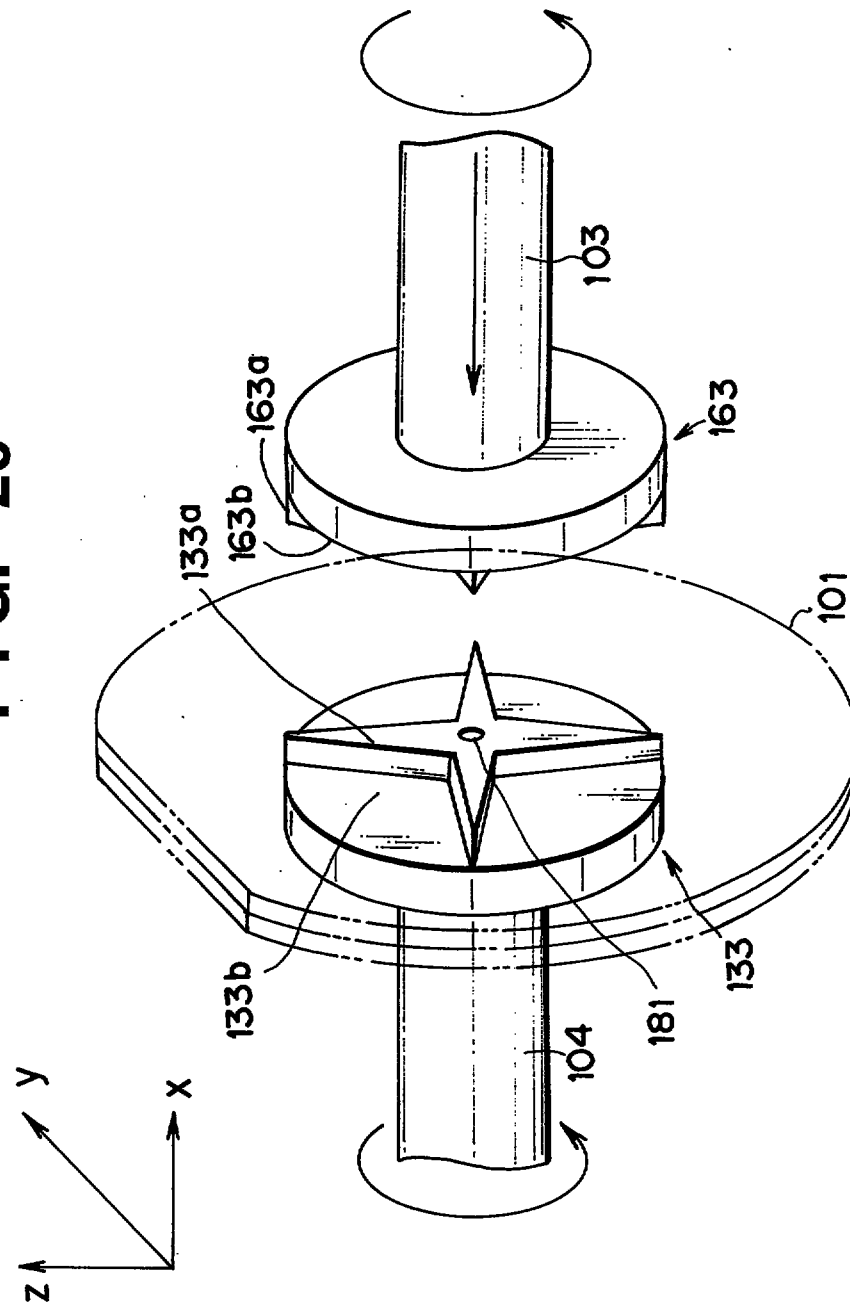


FIG. 21

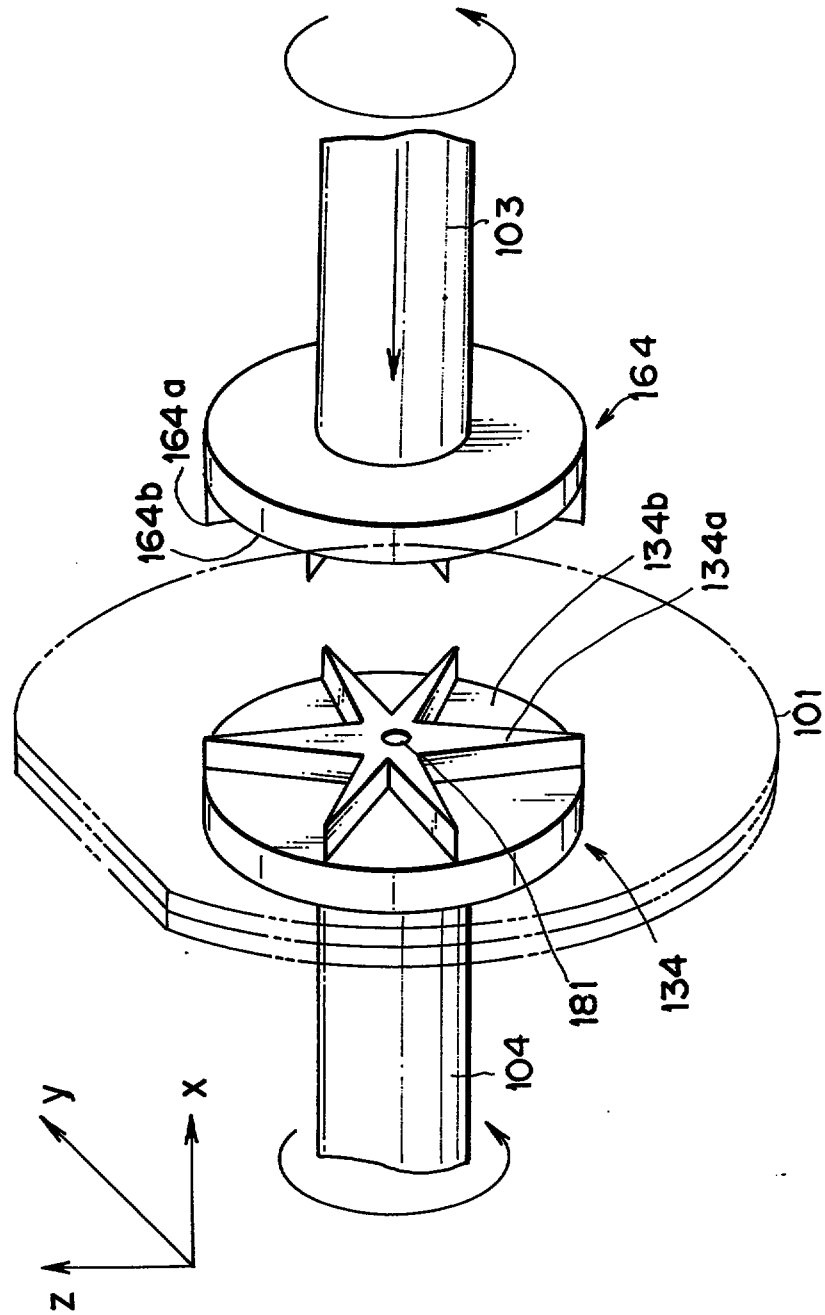


FIG. 22

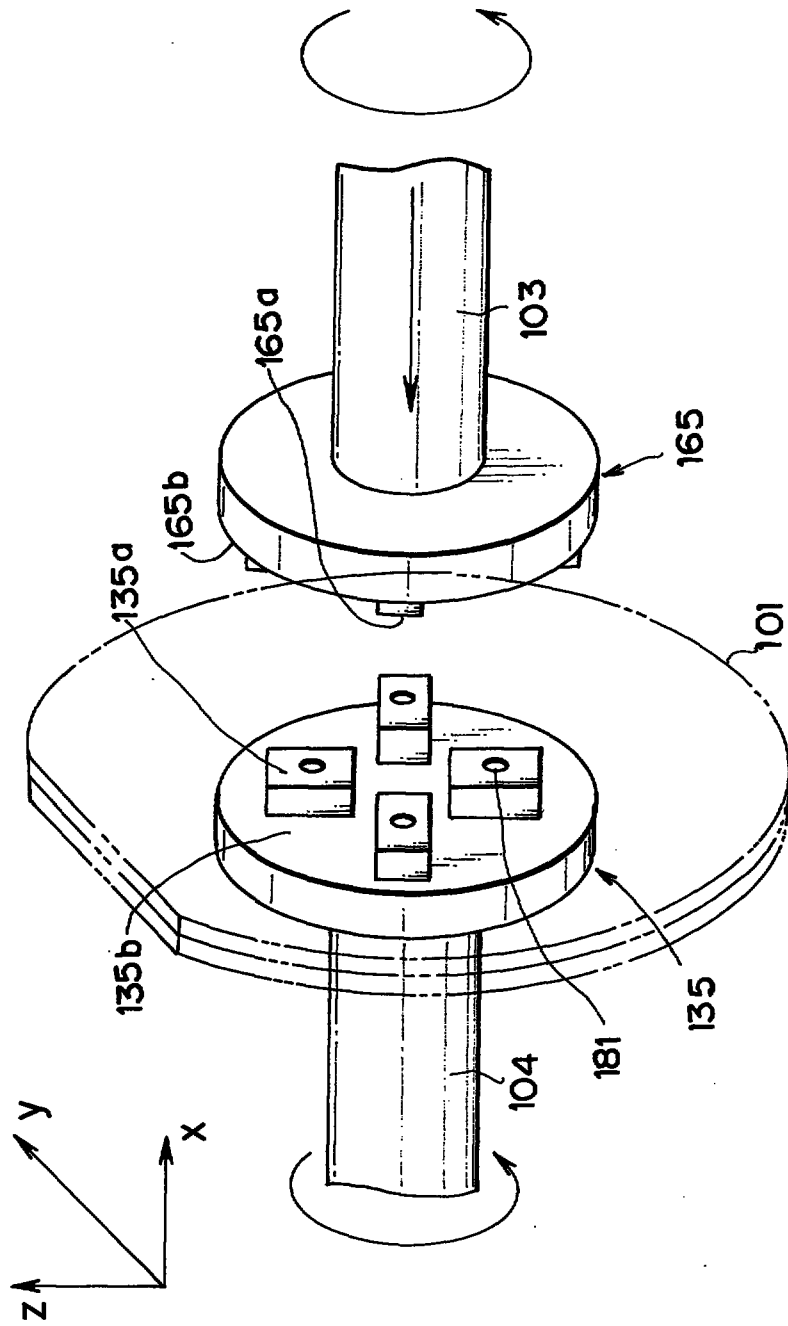


FIG. 23

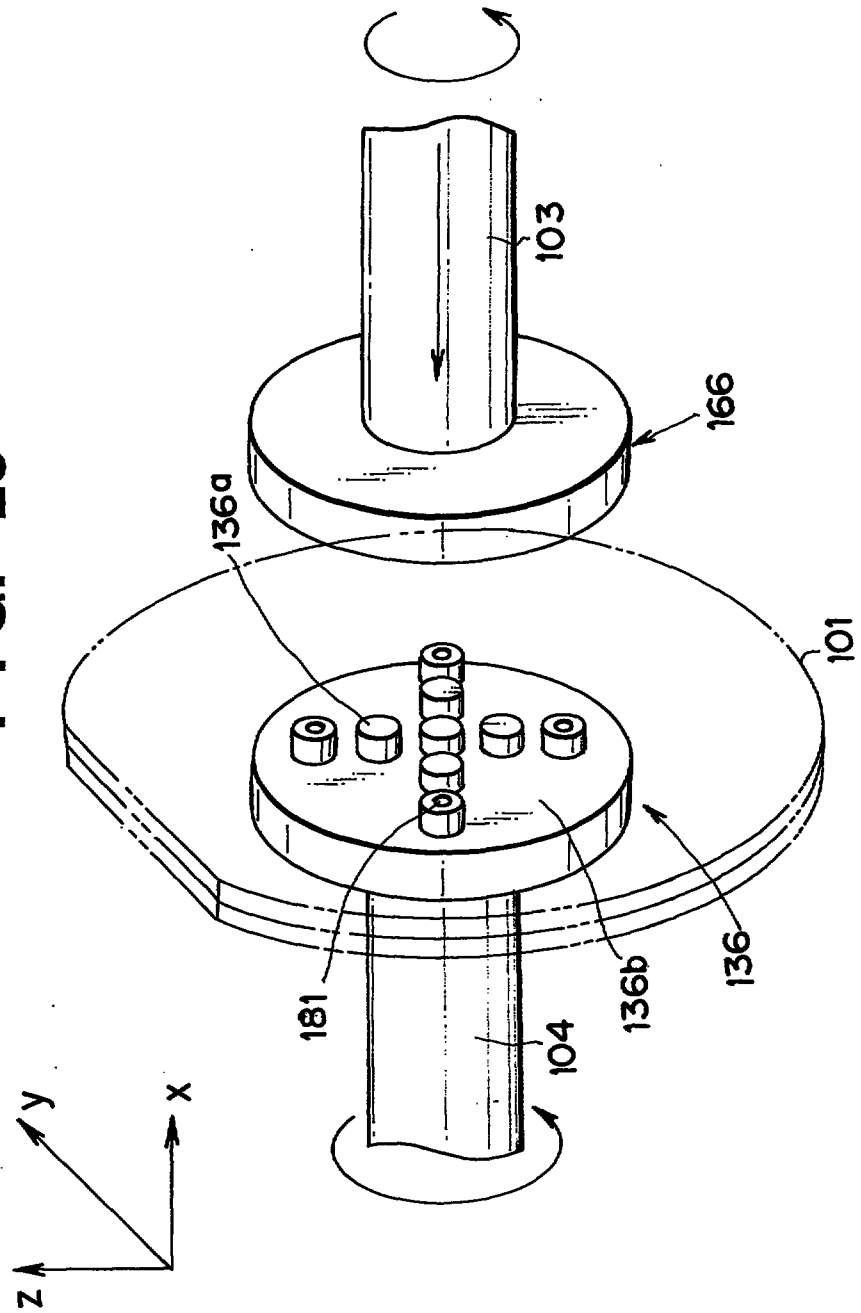


FIG. 24

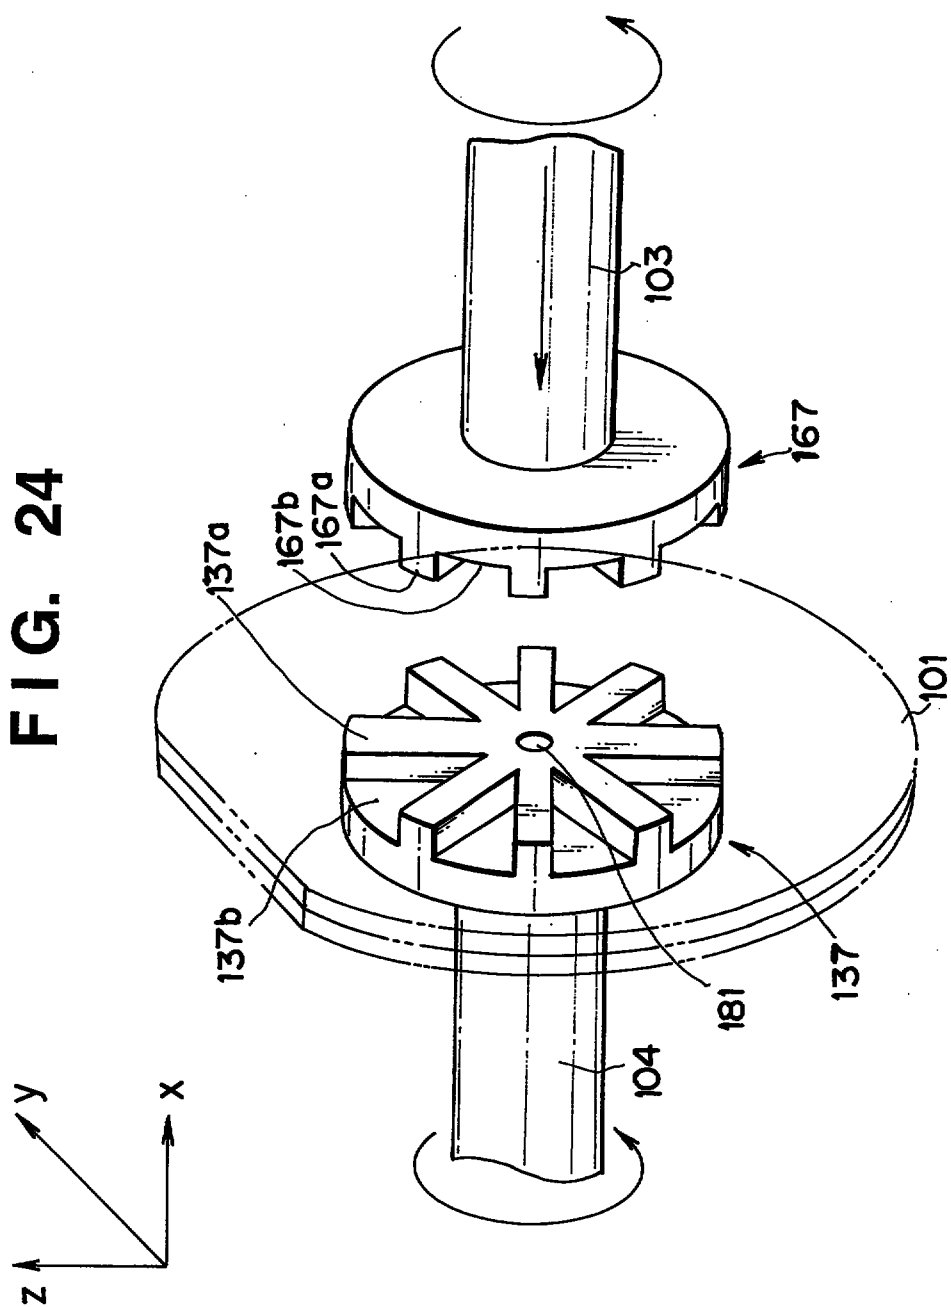


FIG. 25

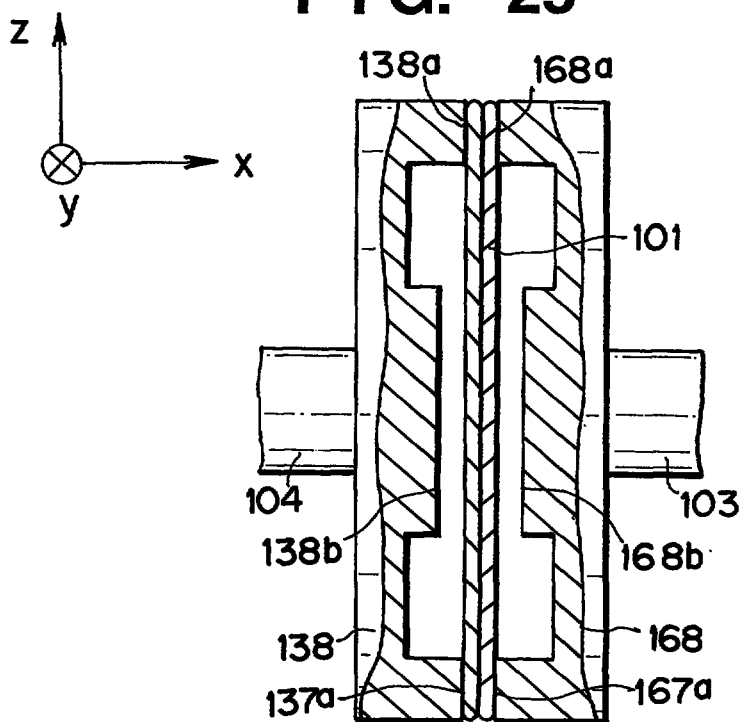


FIG. 26

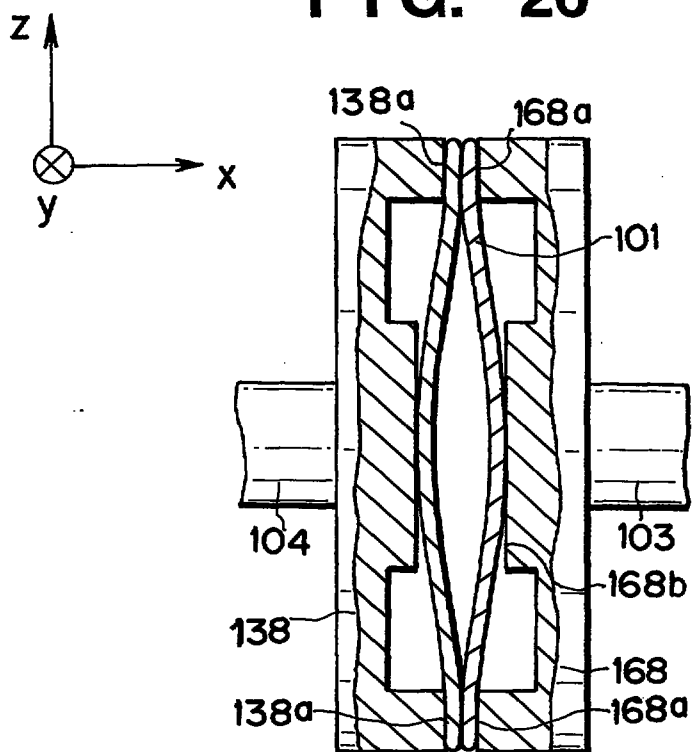


FIG. 27A

FIG. 27B

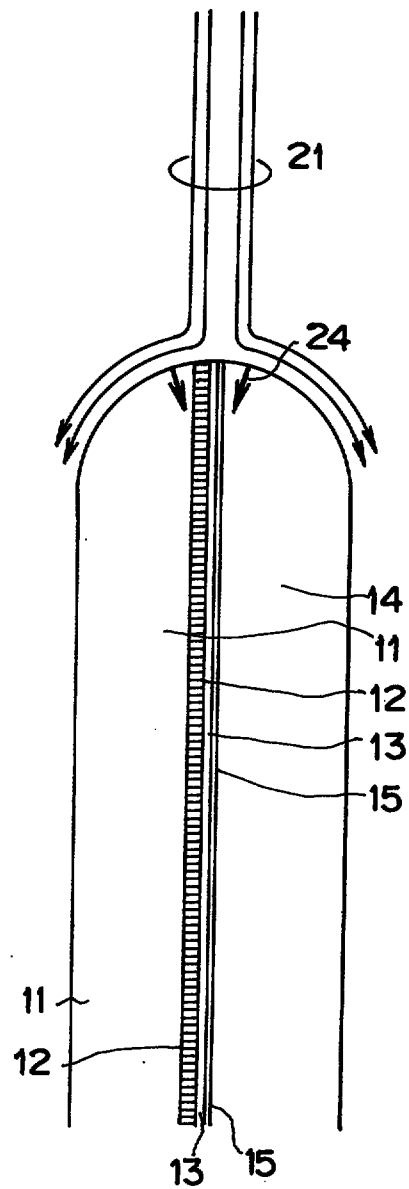
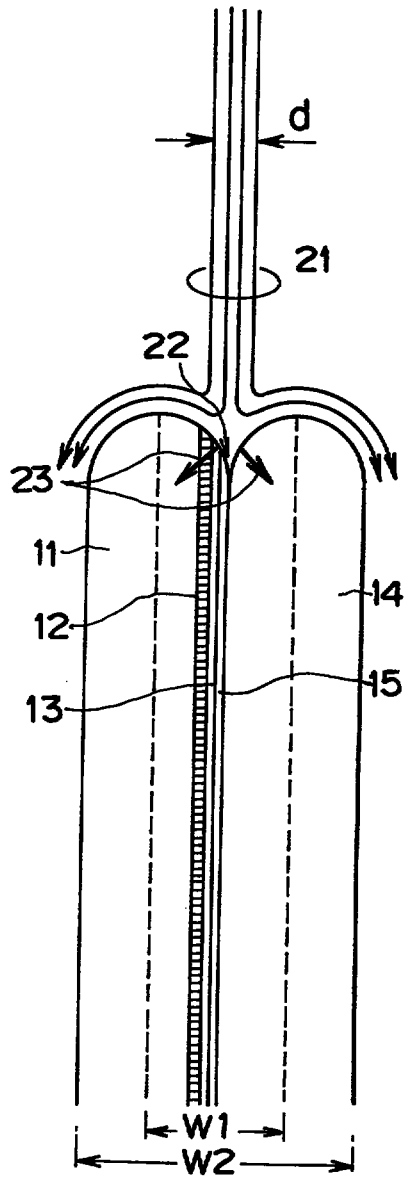


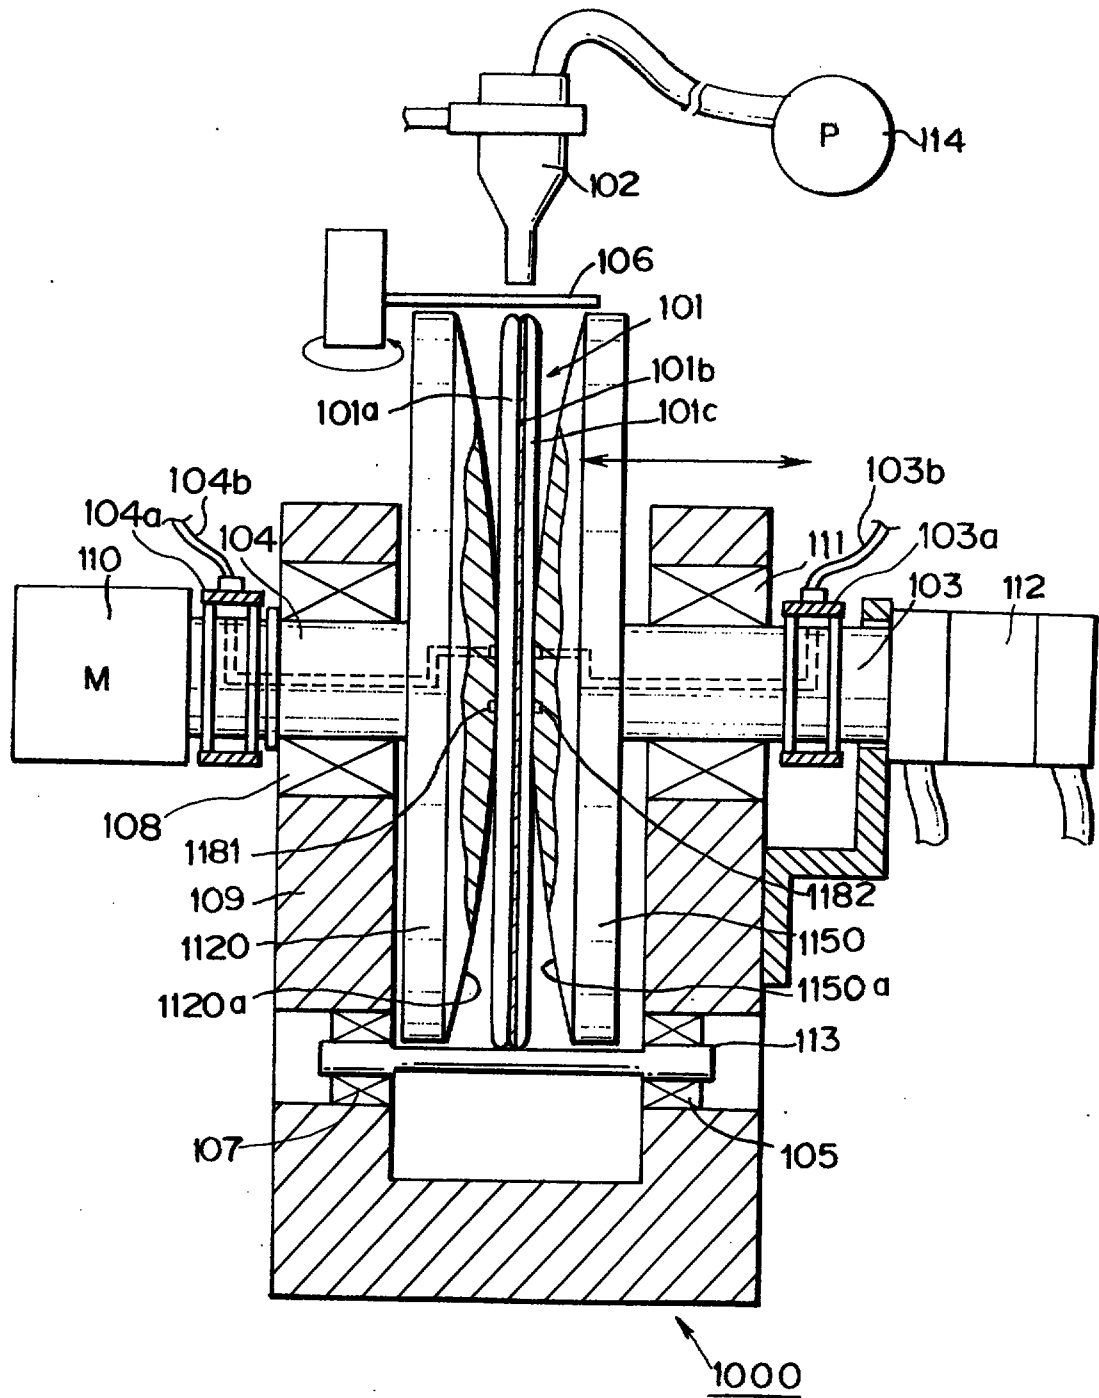
FIG. 28

FIG. 29

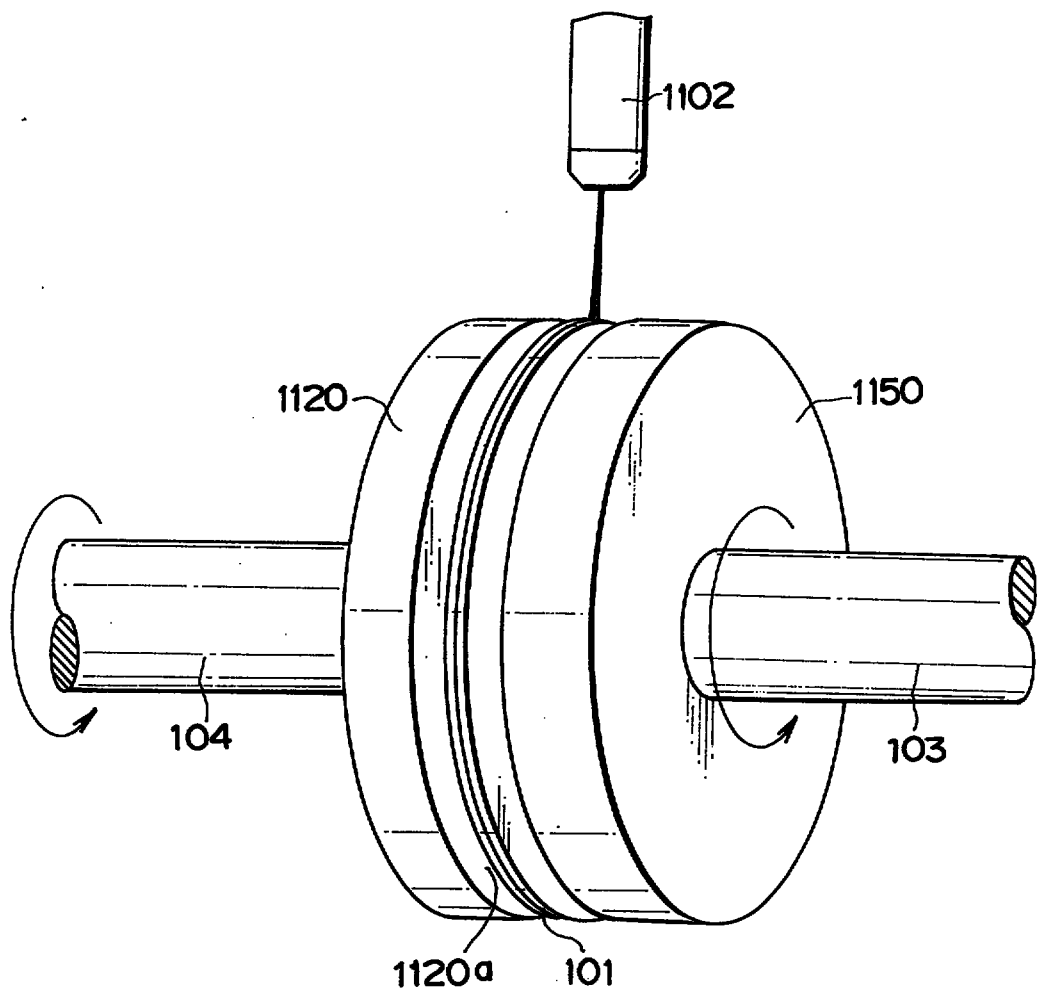


FIG. 30

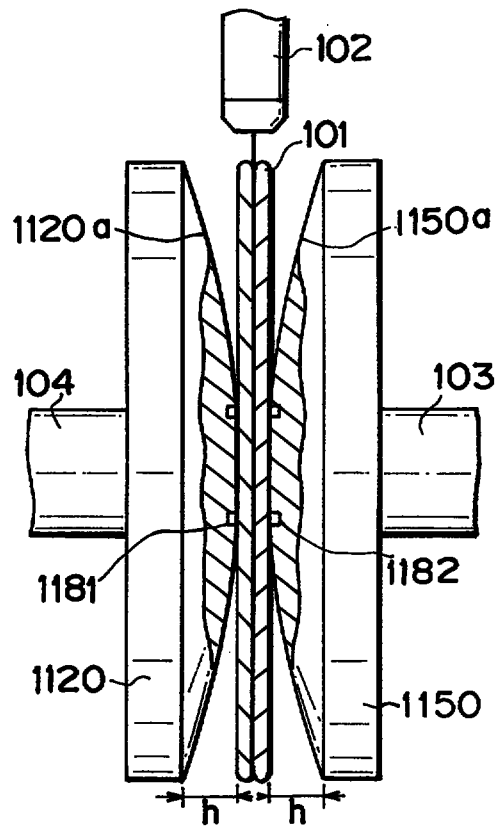


FIG. 31

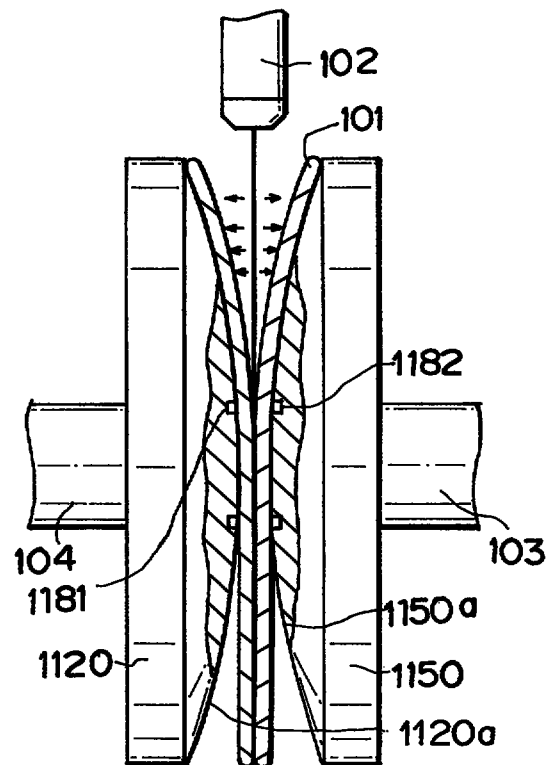


FIG. 32

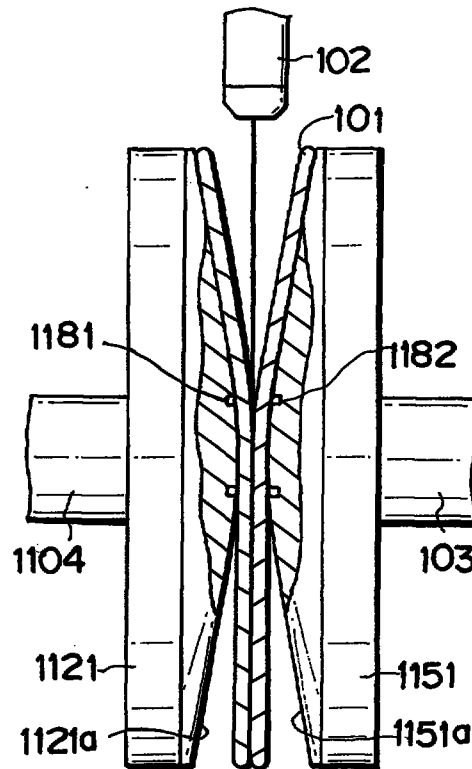


FIG. 33

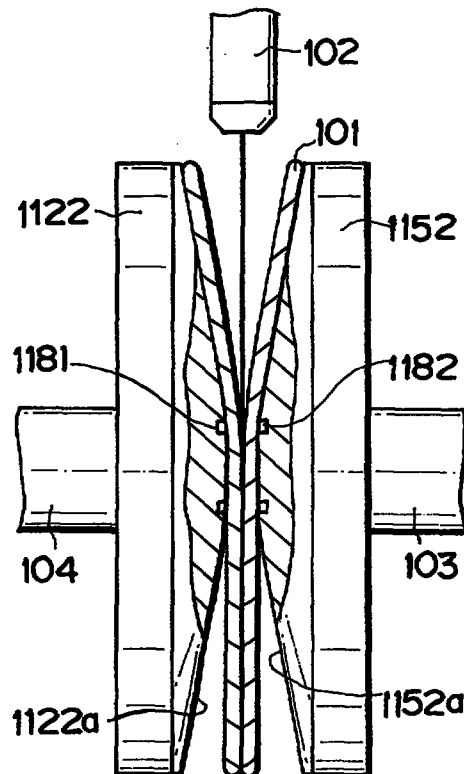


FIG. 34

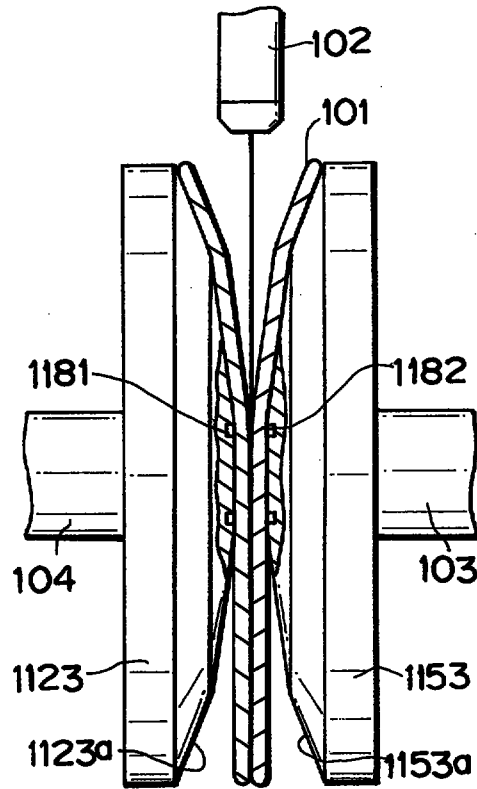


FIG. 35

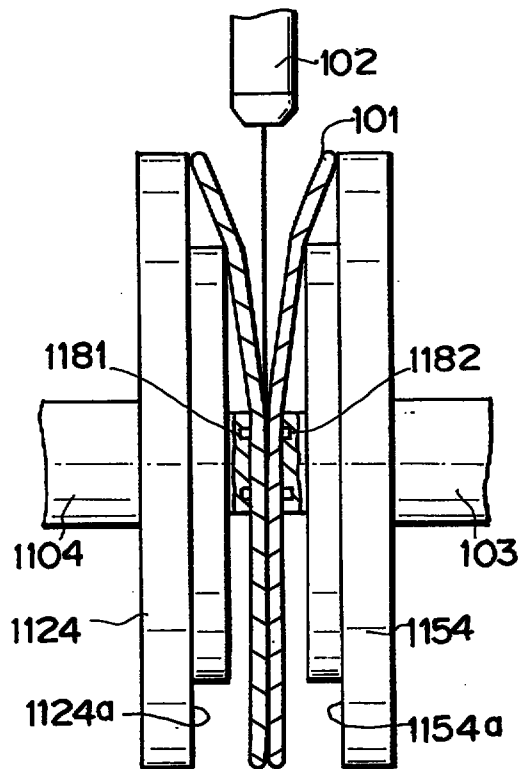


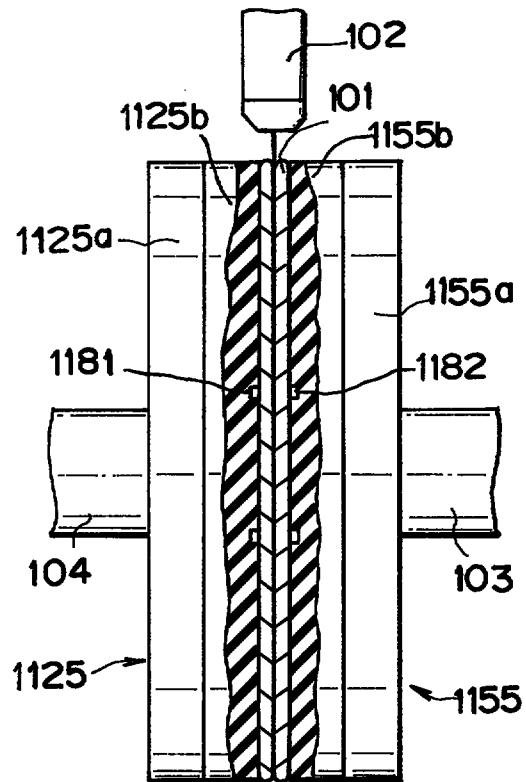
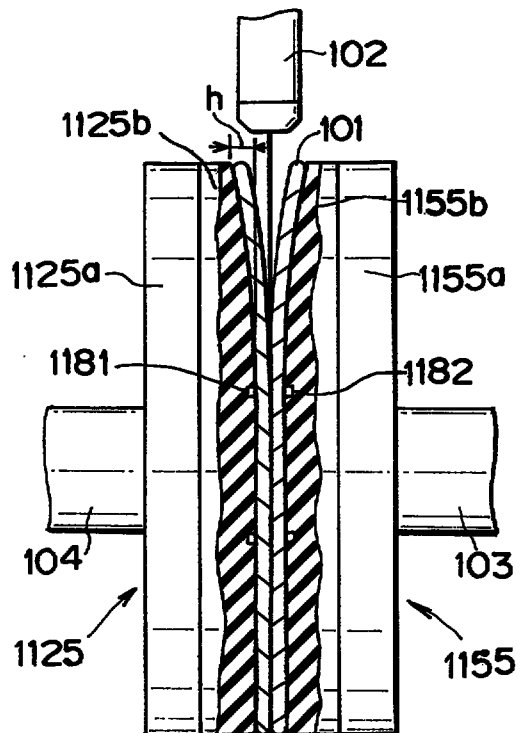
FIG. 36**FIG. 37**

FIG. 38

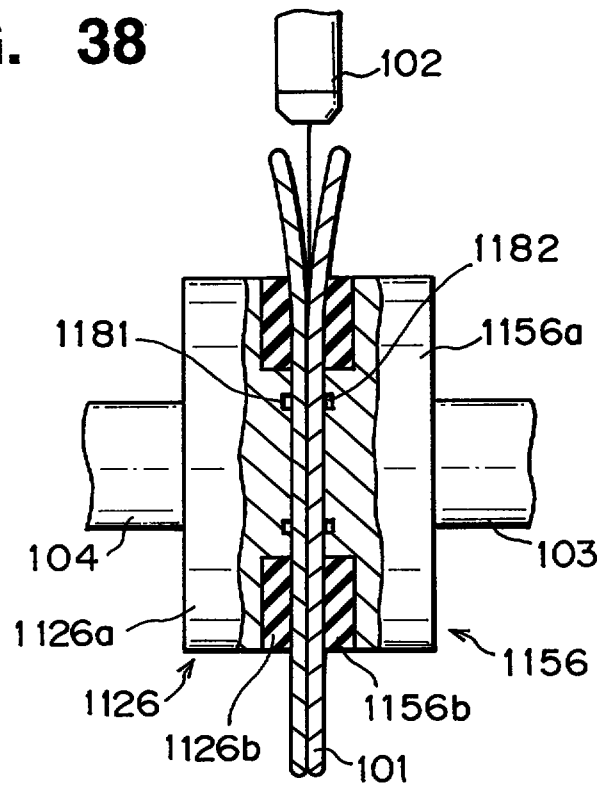


FIG. 39

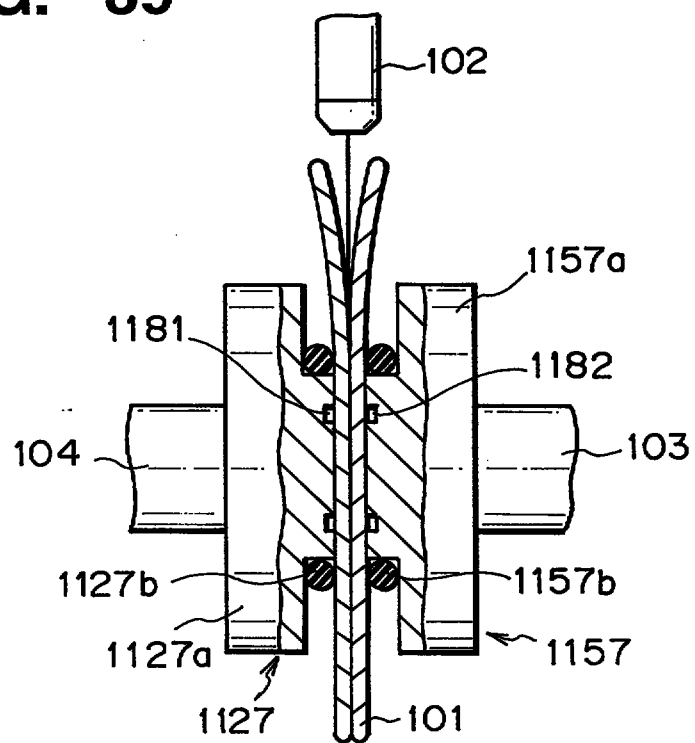


FIG. 40

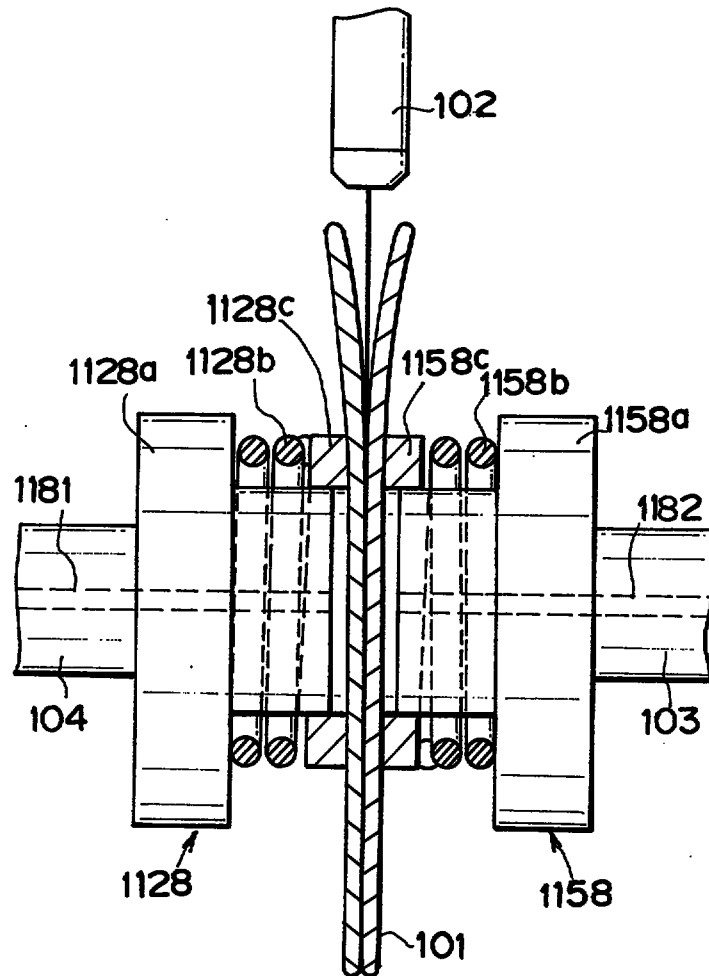



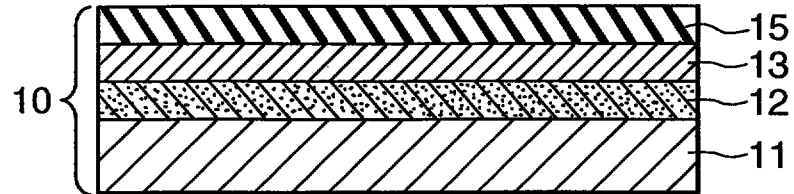
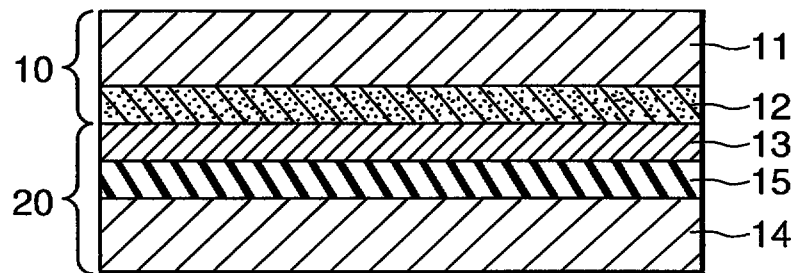
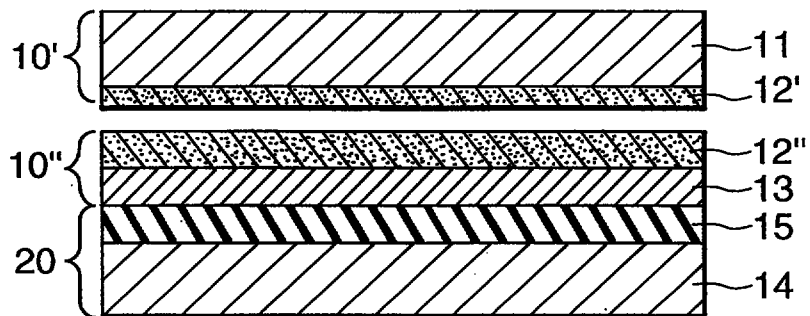
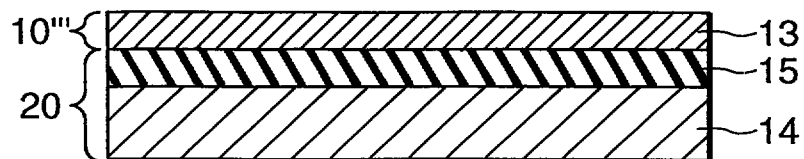
FIG. 41A**FIG. 41B****FIG. 41C****FIG. 41D****FIG. 41E**

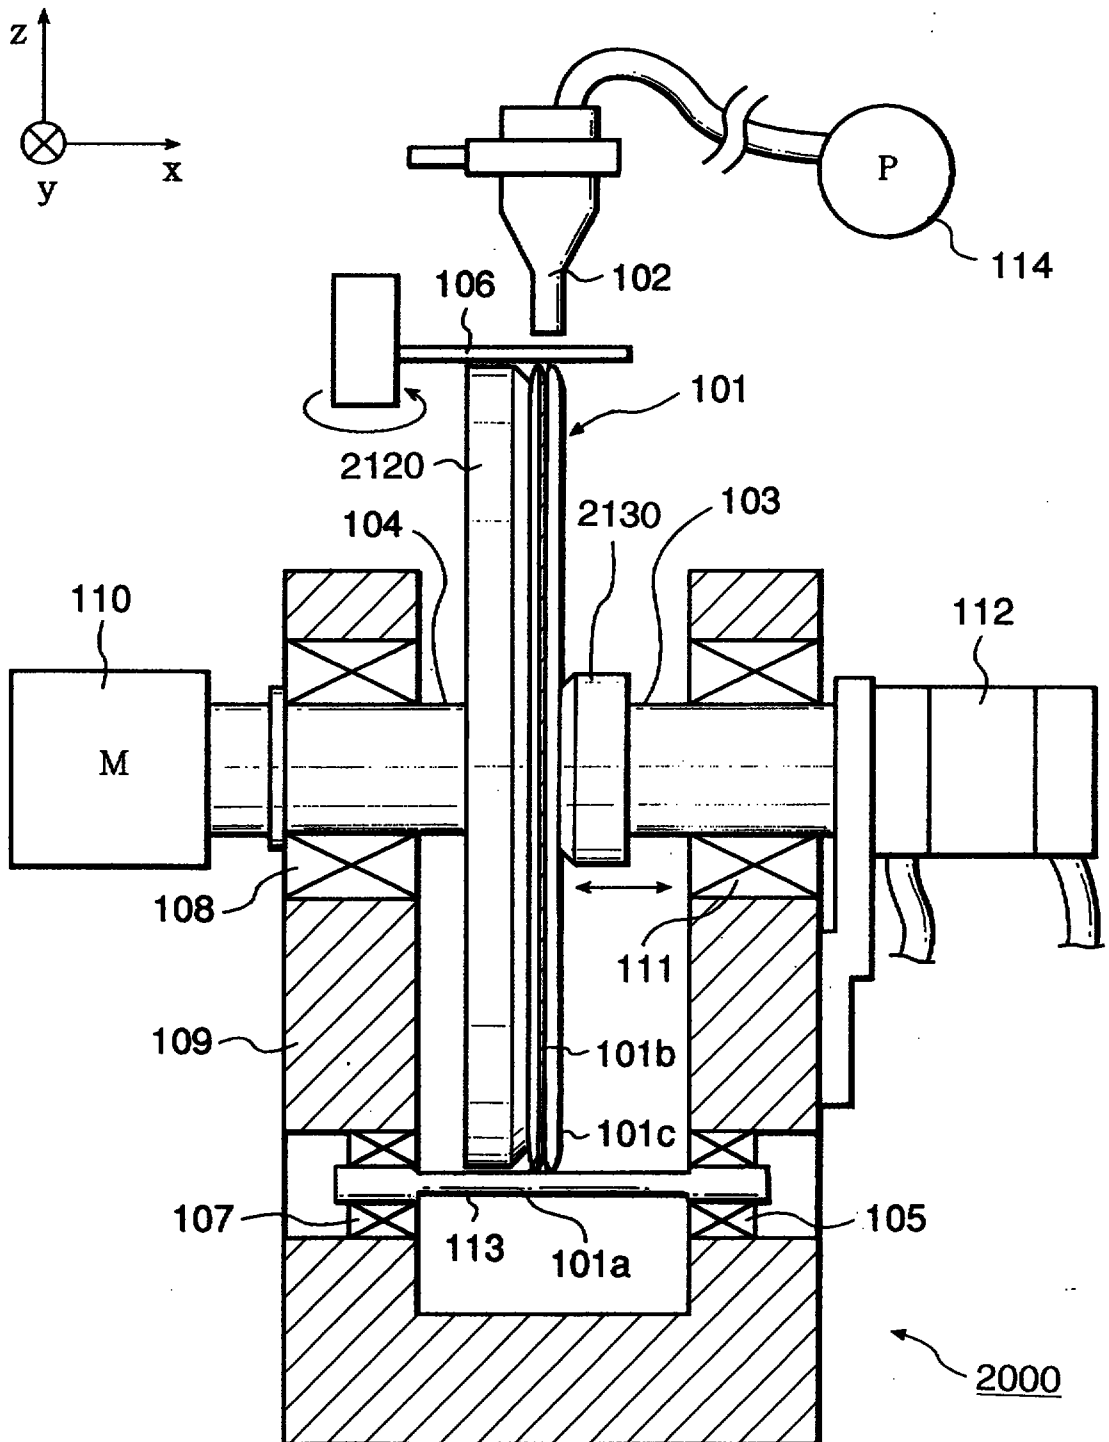
FIG. 42

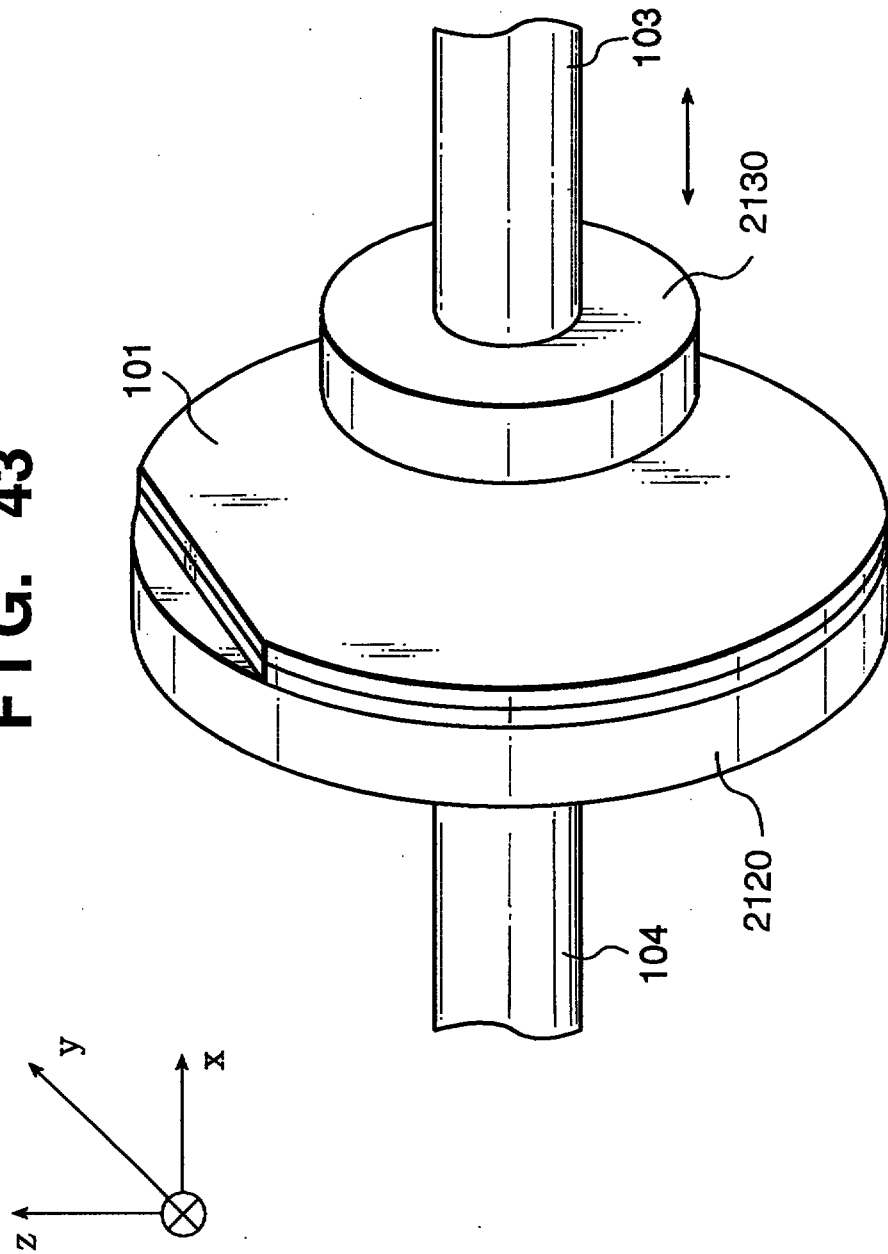
FIG. 43

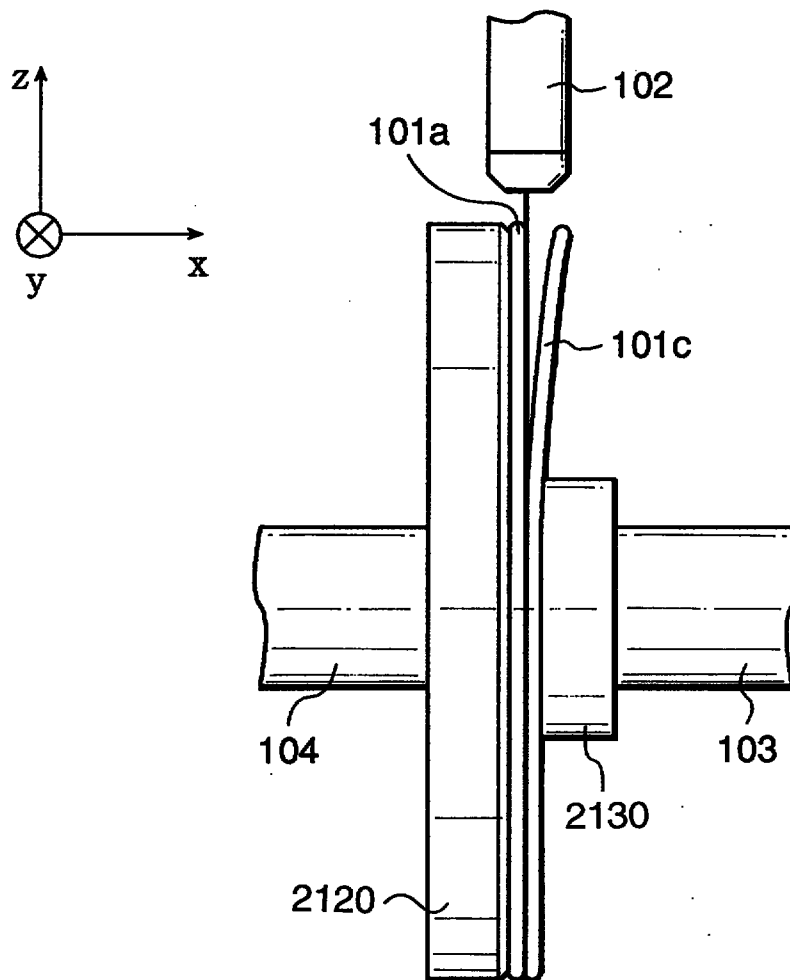
FIG. 44

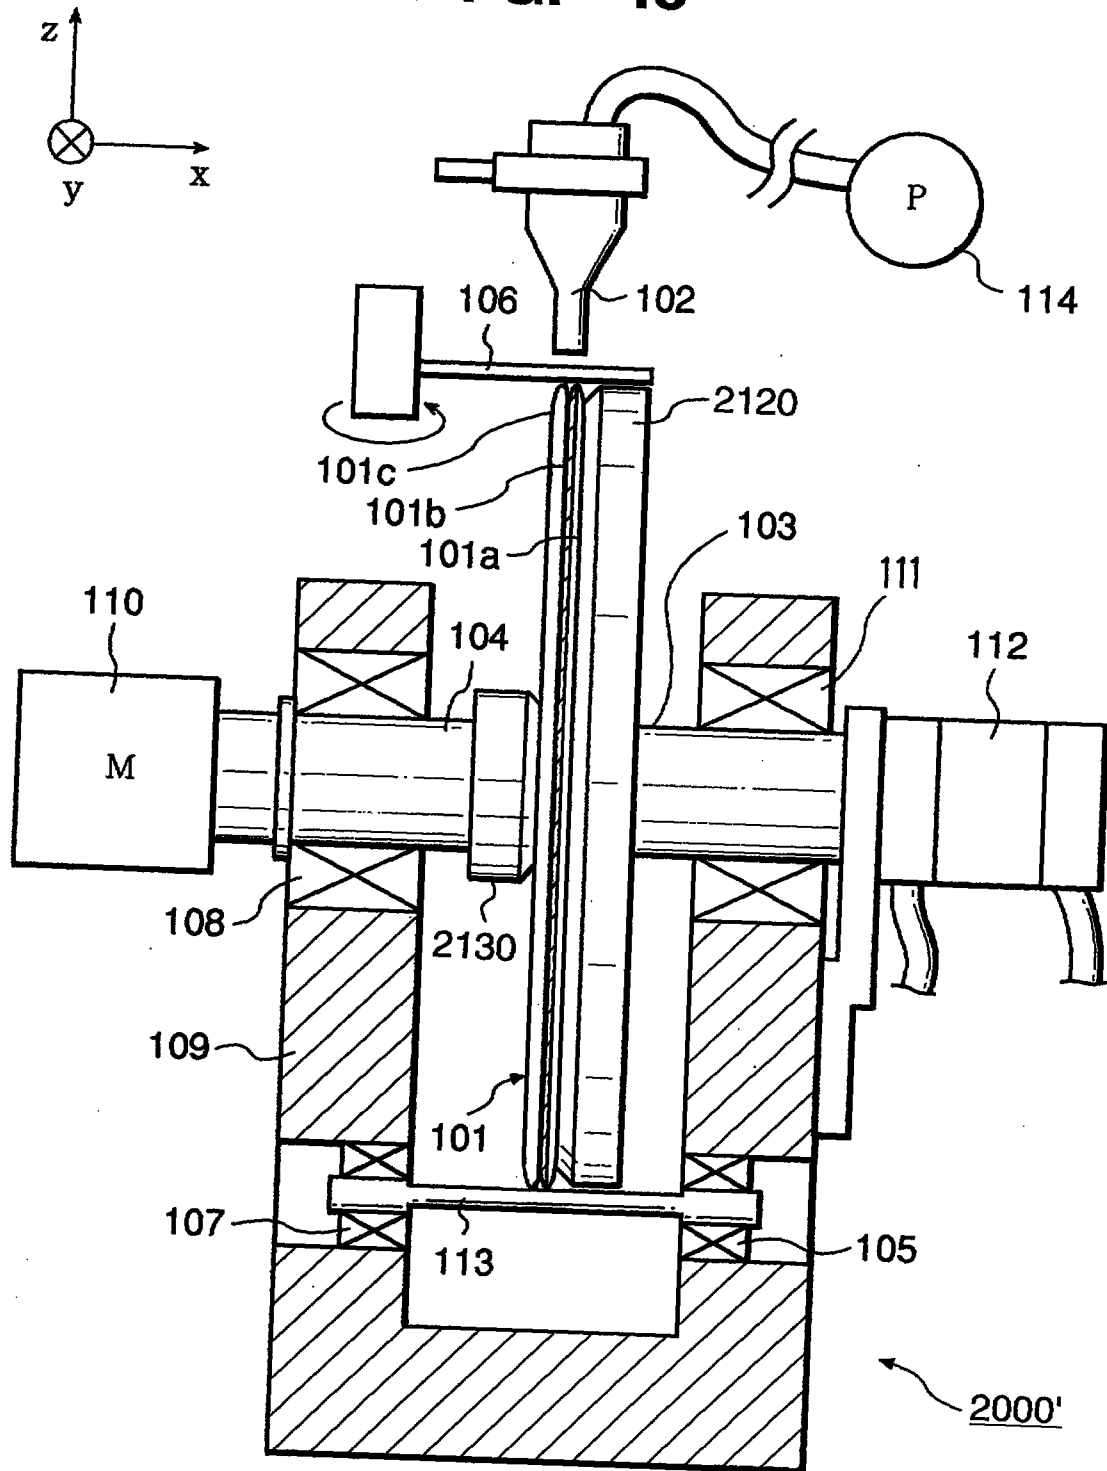
FIG. 45

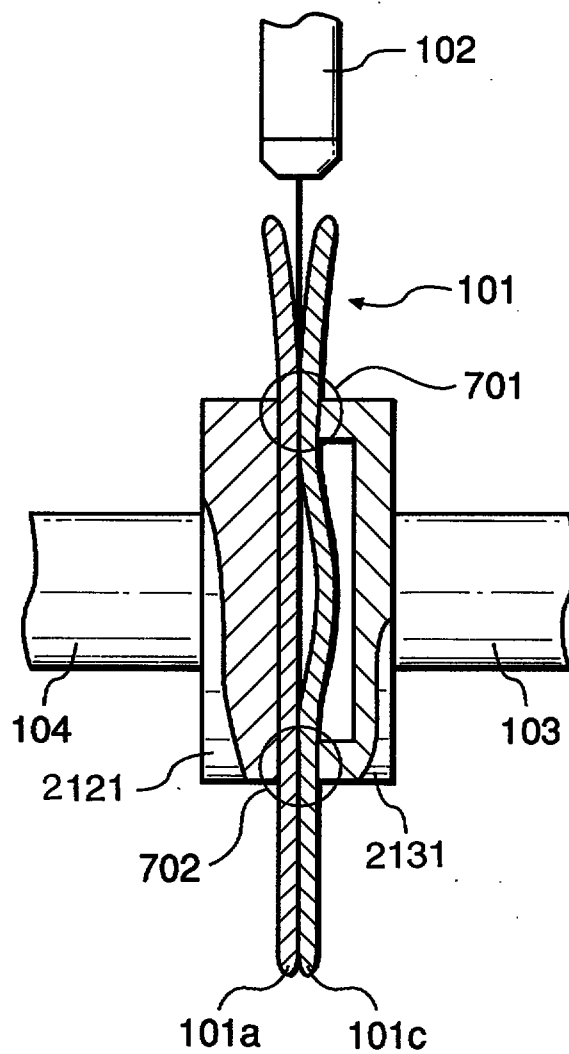

FIG. 46

FIG. 47


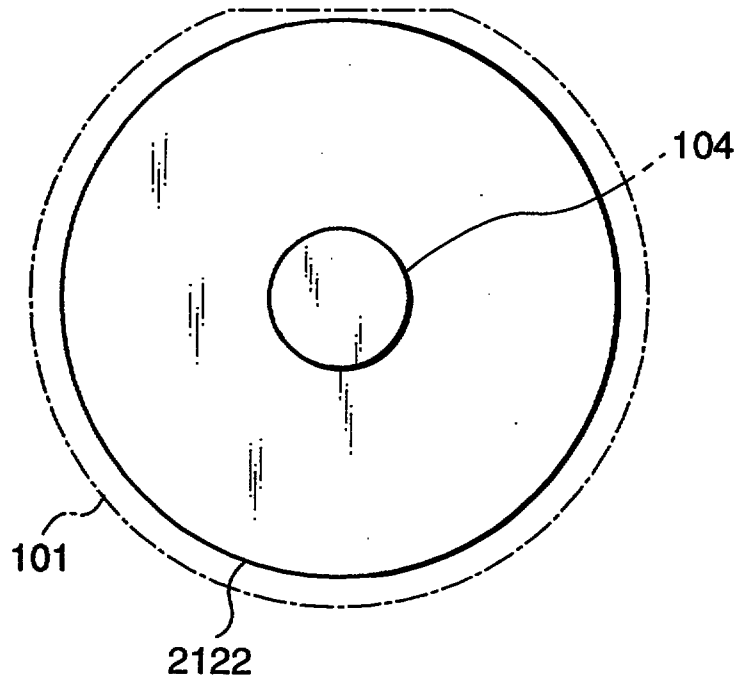

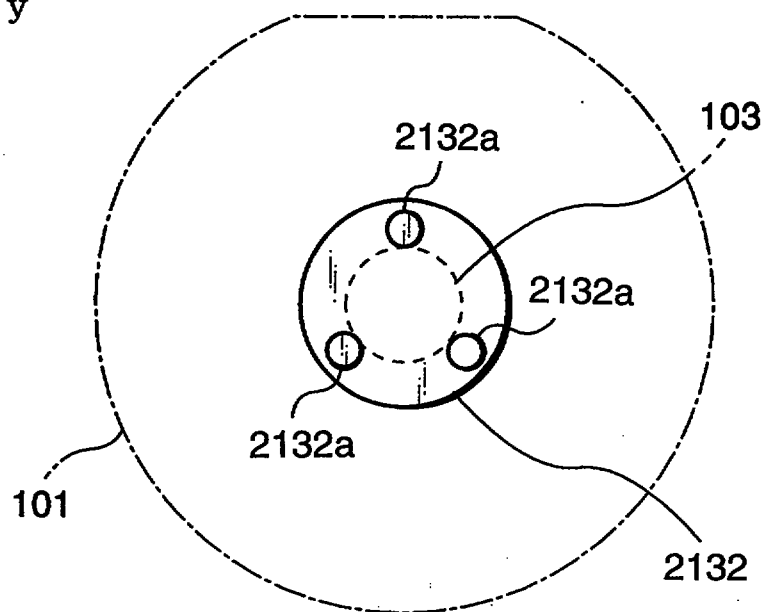


FIG. 48



TITLE OF THE INVENTION

| SAMPLE SEPARATING APPARATUS AND METHOD, AND
SUBSTRATE MANUFACTURING METHOD |

5 BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a sample
separating apparatus and method, and a substrate
10 manufacturing method and, for example, to an apparatus
and method of separating a plate-like sample having an
internal fragile layer at the fragile layer, a sample
support apparatus used in the separating apparatus, and
a substrate manufacturing method using the separating
15 apparatus.

DESCRIPTION OF THE RELATED ART

A substrate (SOI substrate) having an SOI (Silicon
On Insulator) structure is known as a substrate having a
20 single-crystal Si layer on an insulating layer. A device
using this SOI substrate has many advantages that cannot
be achieved by ordinary Si substrates. Examples of the
advantages are as follows.

(1) The integration degree can be increased
25 because dielectric isolation is easy.

(2) The radiation resistance can be increased

REPLACEMENT SHEET

16 MAR 1999

(3) The operating speed of the device can be increased because the stray capacitance is small.

(4) No well step is necessary.

(5) Latch-up can be prevented.

5 (6) A completely depleted field-effect transistor can be formed by thin film formation.

Since an SOI structure has the above various advantages, researches have been made on its formation method for several decades.

10 As one SOI technology, an SOS (Silicon On Sapphire) technology by which Si is heteroepitaxially grown on a single-crystal sapphire substrate by CVD (Chemical Vapor Deposition) has been known for a long time. This SOS
15 technology was once recognized as the most matured SOI technology. However, the SOS technology has not been put into practical use to date because, e.g., a large amount of crystal defects are produced by lattice mismatch in the interface between the Si layer and the underlying sapphire substrate, aluminum that forms the sapphire
20 substrate mixes in the Si layer, the substrate is expensive, and it is difficult to obtain a large area.

Various SOI technology appeared following the SOS technology. For these SOI technologies, various methods have been examined aiming at reducing crystal defects or
25 manufacturing cost. There are a method of implanting oxygen ions into a substrate to form a buried oxide

layer, a method of bonding two wafers via an oxide film and polishing or etching one of the wafers to leave a thin single-crystal Si layer on the oxide film, and a method of implanting hydrogen ions to a predetermined

5 depth from the surface of an Si substrate having an oxide film, bonding the Si substrate to the other substrate, and peeling the latter substrate (the other substrate) by a heat treatment while leaving a thin single-crystal Si layer on the oxide film.

10 The present applicant has disclosed a new SOI technology in Japanese Patent Laid-Open No. 5-21338. In this technology, a first substrate obtained by forming a non-porous single-crystal layer (including a single-crystal Si layer) on a single-crystal

15 semiconductor substrate having a porous layer is bonded to a second substrate via an insulating layer (SiO_2), and the two substrates are separated from the porous layer to transfer the non-porous single-crystal layer to the second substrate. This technology is advantageous in

20 that the SOI layer has high film thickness uniformity, the crystal defect density in the SOI layer can be decreased, the SOI layer has high surface planarity, no expensive special fabrication apparatus is necessary, and SOI substrates having SOI films about a few hundred

25 ~ to 10 μm thick can be fabricated by the same fabrication apparatus.


In addition, the present applicant has disclosed another technology in Japanese Patent Laid-Open No. 7-302889 in which, after the first and second substrates described above are bonded, the first substrate is
5 separated from the second substrate without breaking, and the separated first substrate is reused by smoothening the surface and again forming a porous layer. Since the first substrate can be economically used, this technology has the advantages that the
10 fabrication cost can be largely reduced and the fabrication process is also simple.

In the above technologies, however, when the two bonded substrates are separated it is necessary to prevent damages to the substrates and protect the
15 fabrication apparatus and the like from contamination caused by the generation of particles.

SUMMARY OF THE INVENTION

The present invention has been made in
20 consideration of the above situation, and has as its object to provide a separating apparatus and method suitable to separate a sample such as a substrate, a sample support apparatus used in this separating apparatus, and a substrate manufacturing method using
25 the separating apparatus.

According to the present invention, there is



provided a separating apparatus for separating a
plate-like sample having an internal fragile layer at
the fragile layer, characterized by comprising a jet
unit for ejecting a fluid to the sample, and a pair of
5 holding portions opposing each other to sandwich and
hold the sample, wherein the pair of holding portions
hold the sample to allow the sample to expand at a
vicinity of a central portion due to a pressure of the
fluid ejected from the jet unit and injected into the
10 sample.

According to the present invention, there is also
provided a separating apparatus for separating a
plate-like sample having an internal fragile layer at
the fragile layer, characterized by comprising a jet
15 unit for ejecting a fluid to the sample, and a pair of
holding portions opposing each other to sandwich and
hold the sample, wherein the pair of holding portions
hold the sample which can corrugate due to a pressure of
the fluid ejected from the jet unit and injected into
20 the sample.

In the separating apparatus, preferably, at least
one of the pair of holding portions has a hollow contact
portion, and the sample is held by bringing the contact
portion into contact with the sample. The contact
25 portion may comprise a multiple of contact portions.

In the separating apparatus, preferably, at least

one of the pair of holding portions has an annular contact portion, and the sample is held by bringing the contact portion into contact with the sample. The contact portion may comprise a multiple of contact-
5 portions.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing the contact portion into
10 contact with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by bringing the contact portion into contact
15 with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing the contact
20 portion into contact with the sample.

In the separating apparatus, preferably, at least one of the pair of holding portions has a radial contact portion, and the sample is held by bringing the contact portion into contact with the sample.

25 In the separating apparatus, preferably, at least one of the pair of holding portions has a contact

16 MAR 1999

-7-

portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing the contact portion into contact with the sample. Preferably, the contact portion can contact the whole peripheral portion of the sample.

The separating apparatus preferably further comprises a rotary mechanism for rotating the holding portion about a shaft perpendicular to a surface of the sample.

10 The separating apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism presses the sample to adjust the interval between the pair of holding portions.

In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism maintains a substantially constant interval between the pair of holding portions.

In the separating apparatus, preferably, each of the pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

The separating apparatus is suitable for processing of separating a substrate having a porous layer as the fragile layer.

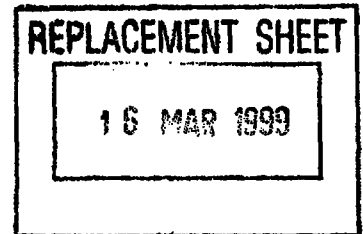
16 MAR 1999

- 8 -

According to the present invention, there is also provided a support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer-at
5 the fragile layer, characterized by comprising a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central portion due to a pressure of a
10 fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample.

According to the present invention, there is also provided a support apparatus for supporting a sample, which is used in a separating apparatus for separating a
15 plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions hold the sample to allow the sample to corrugate due to
20 a pressure of a fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has a hollow contact
25 portion, and the sample is held by bringing the contact portion into contact with the sample. The contact



portion may comprise a multiple of contact portions.

In the support apparatus, preferably, at least one of the pair of holding portions has an annular contact portion, and the sample is held by bringing the contact
5 portion into contact with the sample. The contact portion may comprise a multiple of contact portions.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is
10 held by bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by
15 bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has one or a plurality of projecting contact portions on a main body surface,
20 and the sample is held by bringing the contact portion into contact with the sample.

In the support apparatus, preferably, at least one of the pair of holding portions has a radial contact portion, and the sample is held by bringing the contact
25 portion into contact with the sample.

In the support apparatus, preferably, at least one

of the pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing the contact portion into contact with the sample.

- 5 Preferably, the contact portion can contact the whole peripheral portion of the sample.

The support apparatus preferably further comprises a rotary mechanism for rotating the holding portion about a shaft perpendicular to a surface of the sample.

- 10 The support apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

- In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism
15 presses the sample to adjust the interval between the pair of holding portions.

- In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism maintains a substantially constant interval between the
20 pair of holding portions.

In the support apparatus, preferably, each of the pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

- The support apparatus is suitable as a support
25 apparatus for supporting a substrate having a porous layer as the fragile layer during separation processing.

According to the present invention, there is also provided a sample separating method characterized by comprising separating a sample having a fragile layer using the above separating apparatus.

5 In the separating method, preferably, water is used as the fluid to be ejected from the jet unit.

According to the present invention, there is also provided a separating method of separating a substrate at a porous layer, the substrate being formed by bonding
10 a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, characterized in that the above separating apparatus is used for separation.

15 According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one
20 surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the above separating apparatus is used in the separation step.

According to the present invention, there is also provided a separating apparatus for separating a
25 plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a jet

unit for ejecting a fluid to the sample, and a pair of holding portions opposing each other to sandwich and hold the sample, wherein the pair of holding portions allow the sample to warp as the sample is divided into
5 two parts by a pressure of the fluid ejected from the jet unit and injected into the sample and simultaneously limit a warp amount.

In the separating apparatus, preferably, at least one of the pair of holding portions has a smooth convex
10 support surface, and the sample is held by the support surface.

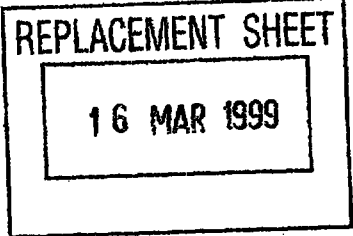
In the separating apparatus, the support surface preferably substantially comprises part of a spherical surface.

15 In the separating apparatus, the support surface preferably comprises a surface formed by a cone with a convex vertex.

In the separating apparatus, the support surface preferably substantially comprises a surface formed by a
20 frustum of a cone.

In the separating apparatus, the support surface preferably comprises a smooth convex surface formed by a stack of several frustums.

In the separating apparatus, the support surface
25 preferably comprises a convex surface formed by a stack of several columns.



In the separating apparatus, at least one of the pair of holding portions preferably includes an elastic member and deforms due to a force inflicted by the sample.

- 5 In the separating apparatus, preferably, at least one of the holding portions has a support portion partially consisting of an elastic material, and the sample is held by the support portion.

- 10 In the separating apparatus, at least one of the holding portions preferably has an elastic member at a portion which can contact the sample.

In the separating apparatus, at least one of the holding portions preferably has an annular support portion consisting of an elastic member.

- 15 In the separating apparatus, at least one of the holding portions preferably has a support portion coupled to a main body via an elastic member.

- 20 The separating apparatus preferably further comprises a rotary mechanism for rotating the holding portion about a shaft perpendicular to a surface of the sample.

The separating apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

- 25 In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment

mechanism presses the sample to adjust the interval between the pair of holding portions.

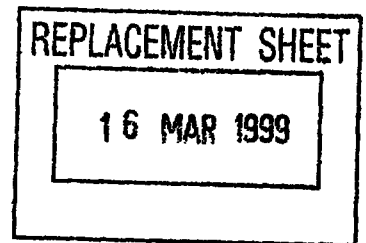
In the separating apparatus, preferably, in separating the sample by the fluid, the adjustment
5 mechanism maintains a substantially constant interval between the pair of holding portions.

In the separating apparatus, each of the pair of holding portions preferably has a chuck mechanism for vacuum-chucking the sample.

10 The separating apparatus is suitable for processing of separating a substrate having a porous layer as the fragile layer.

According to the present invention, there is also provided a support apparatus for supporting a sample,
15 which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising a pair of holding portions for sandwiching and holding the sample, wherein the pair of holding portions allow the sample to
20 warp as the sample is divided into two parts by a pressure of the fluid ejected from a jet unit arranged in the separating apparatus and injected into the sample and simultaneously limit a warp amount.

In the support apparatus, preferably, at least one
25 of the pair of holding portions has a smooth convex support surface, and the sample is held by the support



surface.

In the support apparatus, the support surface preferably substantially comprises part of a spherical surface.

5 In the support apparatus, the support surface preferably comprises a surface formed by a cone with a convex vertex.

In the support apparatus, the support surface preferably substantially comprises a surface formed by a
10 frustum of a cone.

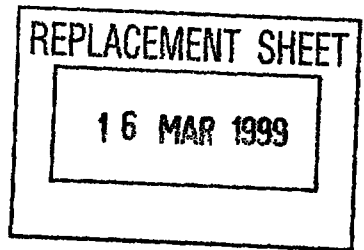
In the support apparatus, the support surface preferably comprises a smooth convex surface formed by a stack of several frustums.

In the support apparatus, the support surface
15 preferably comprises a convex surface formed by a stack of several columns.

In the support apparatus, at least one of the pair of holding portions preferably includes an elastic member and deforms due to a force inflicted by the
20 sample.

In the support apparatus, preferably, at least one of the holding portions has a support portion partially consisting of an elastic material, and the sample is held by the support portion.

25 In the support apparatus, at least one of the holding portions preferably has an elastic member at a



portion which can contact the sample.

In the support apparatus, at least one of the holding portions preferably has an annular support portion consisting of an elastic member.

- 5 In the support apparatus, at least one of the holding portions preferably has a support portion coupled to a main body via an elastic member.

- The support apparatus preferably further comprises a rotary mechanism for rotating the holding portion
10 about a shaft perpendicular to a surface of the sample.

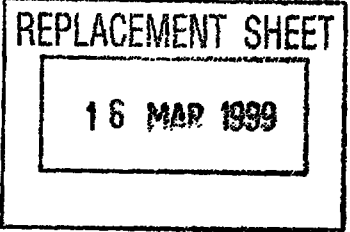
 The support apparatus preferably further comprises an adjustment mechanism for adjusting an interval between the pair of holding portions.

- In the support apparatus, preferably, in separating
15 the sample by the fluid, the adjustment mechanism presses the sample to adjust the interval between the pair of holding portions.

- In the support apparatus, preferably, in separating the sample by the fluid, the adjustment mechanism
20 maintains a substantially constant interval between the pair of holding portions.

 In the support apparatus, each of the pair of holding portions preferably has a chuck mechanism for vacuum-chucking the sample.

- 25 The support apparatus is suitable as a support apparatus for supporting a substrate having a porous



layer as the fragile layer during separation processing.

According to the present invention, there is also provided a sample separating method characterized by comprising separating a sample having a fragile layer
5 using the above separating apparatus.

In the separating method, water is preferably used as the fluid to be ejected from the jet unit.

According to the present invention, there is also provided a separating method of separating a substrate
10 at a porous layer, the substrate being formed by bonding a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, characterized in that the above separating
15 apparatus is used for separation.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer side of a first substrate, in which a porous layer and
20 the non-porous layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the above separating apparatus is used in the separation step.

The present invention has been made in
25 consideration of the above situation, and has as its object to provide a separating apparatus and method

suitable to separate a plate-like sample represented by a substrate such as a bonded substrate stack, and a substrate manufacturing method to which the apparatus or method is applied.

5 According to the present invention, there is provided a separating apparatus for separating a plate-like sample, characterized by comprising a jet unit for ejecting a fluid for separating the sample to the sample, and first and second holding portions for
10 sandwiching and holding the sample, wherein the first and second holding portions have holding surfaces with different shapes.

 In the separating apparatus, preferably, the first holding portion holds one surface of the sample to make
15 a deflection amount of the one surface due to a pressure of the fluid injected into the sample relatively small, and the second holding portion holds the other surface of the sample to make a deflection amount of the other surface due to the pressure of the fluid relatively
20 large.

 In the separating apparatus, preferably, the first holding portion holds one surface of the sample not to cause the one surface to deflect due to a pressure of the fluid injected into the sample, and the second
25 holding portion holds the other surface of the sample to cause the other surface to deflect due to the pressure

of the fluid.

In the separating apparatus, the holding surface of the first holding portion and the holding surface of the second holding portion preferably have different areas.

5 In the separating apparatus, preferably, the first holding portion has a holding surface for wholly holding one surface of the sample, and the second holding portion has a holding surface for partially holding the other surface of the sample.

10 In the separating apparatus, the holding surface of the first holding portion preferably comprises a flat surface.

In the separating apparatus, the holding surface of the first holding portion preferably comprises a curved
15 surface.

In the separating apparatus, the holding surface of the second holding portion is preferably annular.

In the separating apparatus, preferably, the second holding portion has a plurality of projecting members,
20 and the sample is held by tips of the plurality of projecting members.

In the separating apparatus, the second holding portion preferably has a shape allowing the sample to deflect while expanding at a central portion on a side
25 of the second holding portion due to the pressure of the fluid injected into the sample.

16 MAR 1999

- 20 -

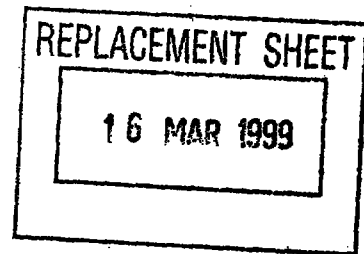
In the separating apparatus, the second holding portion preferably has a shape allowing the sample to deflect and corrugate on a side of the second holding portion due to the pressure of the fluid injected into
5 the sample.

The separating apparatus preferably further comprises a rotary mechanism for rotating at least one of the first and second holding portions about a shaft perpendicular to the holding surface to rotate the
10 sample.

In the separating apparatus, preferably, the sample to be processed comprises a substrate formed by bonding first and second substrates, and the first and second substrates have different strengths.

15 According to the present invention, there is also provided a separating method of separating a plate-like sample, characterized by comprising holding the sample by sandwiching the sample by a pair of holding portions having holding surfaces with different shapes, and
20 ejecting a fluid to a predetermined position in a direction of thickness of the sample, thereby separating the sample.

In the separating method, preferably, the sample to be separated has an internal fragile layer, and in
25 separating the sample, the fluid is ejected to the fragile layer.



According to the present invention, there is also provided a separating method of separating a plate-like sample having an internal fragile layer at the fragile layer, characterized by comprising the separation step
5 of ejecting a fluid to the fragile layer of the sample to separate the sample, wherein in the separation step, one surface of the sample is held to make a deflection amount due to a pressure of the fluid injected into the sample relatively small and the other surface of the
10 sample is held to make a deflection amount due to the pressure of the fluid injected into the sample relatively large.

According to the present invention, there is also provided a separating method of separating a plate-like
15 sample having an internal fragile layer at the fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample, wherein in the separation step, one surface of the sample is held to limit deflection
20 due to a pressure of the fluid injected into the sample and the other surface of the sample is held to allow deflection due to the pressure of the fluid injected into the sample.

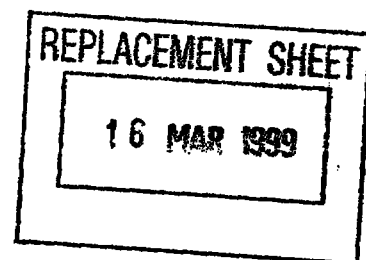
The separating method preferably further comprises
25 rotating the sample about a shaft perpendicular to a major surface of the sample in separating the sample by

the fluid.

In the separating method, preferably, the sample to be processed comprises a sample formed by bonding first and second substrates, and the first and second
5 substrates have different strengths.

According to the present invention, there is also provided a separating method of separating a composite substrate which has a fragile layer between a first substrate having a relatively low strength and a second
10 substrate having a relatively high strength, at the fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer to separate the composite substrate, wherein in the separation step, the first substrate is held to make a
15 deflection amount due to a pressure of the fluid injected into the composite substrate relatively small and the second substrate is held to make a deflection amount due to the pressure of the fluid injected into the composite substrate relatively large.

20 According to the present invention, there is also provided a separating method of separating a composite substrate which has a fragile layer between a first substrate having a relatively low strength and a second substrate having a relatively high strength, at the
25 fragile layer, characterized by comprising the separation step of ejecting a fluid to the fragile layer



to separate the composite substrate, wherein in the separation step, the first substrate is held to limit deflection due to a pressure of the fluid injected into the composite substrate and the second substrate is held
5 to allow deflection due to the pressure of the fluid injected into the composite substrate.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising the step of bonding a non-porous layer
10 side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein any one of the above separating apparatuses is used in the
15 separation step.

According to the present invention, there is also provided a substrate manufacturing method characterized by comprising bonding a non-porous layer side of a first
20 substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, and separating the bonded substrates at the porous layer, wherein the separation step is executed using any one of the above methods.

According to the present invention, there is also
25 provided a holding apparatus for holding a sample in ejecting a fluid to a predetermined position in a

direction of thickness of the sample to separate the sample, characterized in that the sample is held by a pair of holding portions whose holding surfaces for holding the sample have different shapes.

5 Further objects, features and advantages of the present invention will become apparent from the following detailed description of embodiments of the present invention with reference to the accompanying drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A to 1E are views for explaining a method of manufacturing an SOI substrate according to the first embodiment of the present invention;

15 Fig. 2 is a view showing the schematic arrangement of a separating apparatus according to the first embodiment of the present invention;

Fig. 3 is a perspective view of substrate holding portions according to the first example of the first
20 embodiment;

Fig. 4 is a front view of the substrate holding portion according to the first example of the first embodiment;

Fig. 5 is a sectional view of the substrate holding
25 portions according to the first example of the first embodiment;

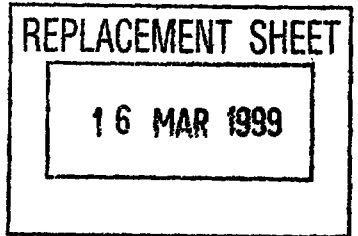


Fig. 6 is a view showing a modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 7 is a view showing another modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 8 is a view showing still another modification of the substrate holding portion according to the first example of the first embodiment;

Fig. 9 is a view showing still another modification of the substrate holding portion according to the first example of the first embodiment;


Fig. 10 is a front view of a substrate holding portion according to the second example of the first embodiment;

Fig. 11 is a sectional view of the substrate holding portions according to the second example of the first embodiment;

Fig. 12 is a perspective view of substrate holding portions according to the third example of the first embodiment;

Fig. 13 is a perspective view showing a modification of the substrate holding portions according to the third example of the first embodiment;

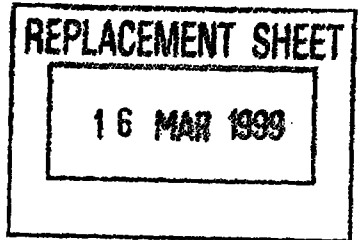Fig. 14 is a perspective view of substrate holding portions according to the fourth example of the first



embodiment;

Fig. 15 is a perspective view showing a modification of the substrate holding portions according to the fourth example of the first embodiment;

5 Fig. 16 is a perspective view of substrate holding portions according to the fifth example of the first embodiment;

Fig. 17 is a front view of the substrate holding portion according to the fifth example of the first
10 embodiment;

Fig. 18 is a perspective view of substrate holding portions according to the sixth example of the first embodiment;


Fig. 19 is a front view of the substrate holding
15 portion according to the sixth example of the first embodiment;

Fig. 20 is a perspective view showing a modification of the substrate holding portions according to the sixth example of the first embodiment;

20 Fig. 21 is a perspective view showing another modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 22 is a perspective view showing still another modification of the substrate holding portions according
25 to the sixth example of the first embodiment;

Fig. 23 is a perspective view showing still another



modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 24 is a perspective view showing still another modification of the substrate holding portions according to the sixth example of the first embodiment;

Fig. 25 is a sectional view of substrate holding portions according to the seventh example of the first embodiment;

Fig. 26 is a sectional view of the substrate holding portions according to the seventh example of the first embodiment;

Figs. 27A and 27B are views showing a force acting on a bonded substrate stack in the presence and absence of a V-shaped groove;

Fig. 28 is a view showing the schematic arrangement of a separating apparatus according to the second embodiment of the present invention;

Fig. 29 is a perspective view of substrate holding portions according to the first example of the second embodiment;

Fig. 30 is a sectional view of the substrate holding portions according to the first example of the second embodiment;

Fig. 31 is a sectional view of the substrate holding portions according to the first example of the second embodiment;

Fig. 32 is a sectional view showing a modification of the substrate holding portions according to the first example of the second embodiment;

Fig. 33 is a sectional view showing another
5 modification of the substrate holding portions according to the first example of the second embodiment;

Fig. 34 is a sectional view showing still another modification of the substrate holding portions according to the first example of the second embodiment;

10 Fig. 35 is a sectional view showing still another modification of the substrate holding portions according to the first example of the second embodiment;


Fig. 36 is a sectional view showing a modification of substrate holding portions according to the second
15 example of the second embodiment;

Fig. 37 is a sectional view showing another modification of the substrate holding portions according to the second example of the second embodiment;

Fig. 38 is a sectional view showing still another
20 modification of the substrate holding portions according to the second example of the second embodiment;

Fig. 39 is a sectional view showing still another modification of the substrate holding portions according to the second example of the second embodiment;

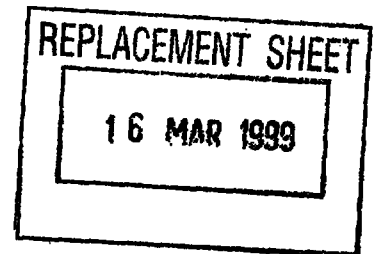25 Fig. 40 is a sectional view showing still another modification of the substrate holding portions according



to the second example of the second embodiment;

Figs. 41A to 41E are views showing for explaining
another method of manufacturing an SOI substrate
according to the preferred embodiment of the present
5 invention;

Fig. 42 is a view showing the schematic arrangement
of a separating apparatus according to the third
embodiment of the present invention;

Fig. 43 is a perspective view of part of the
10 separating apparatus shown in Fig. 42;

Fig. 44 is a view schematically showing separation
processing;

Fig. 45 is a view showing the schematic arrangement
of a separating apparatus of the first modification;


15 Fig. 46 is a view showing the schematic arrangement
of substrate holding portions of a separating apparatus
of the second modification;

Fig. 47 is a view showing the schematic arrangement
of a substrate holding portion (on the first substrate
20 side) of the third modification; and

Fig. 48 is a view showing the schematic arrangement
of the other substrate holding portion (on the second
substrate side) of the third modification.

25 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

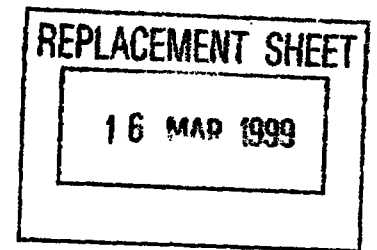Preferred embodiments of the present invention will



be described below with reference to the accompanying drawings.

Figs. 1A to 1E are views for explaining a method of manufacturing an SOI substrate according to a preferred
5 embodiment of the present invention.

Referring to Fig. 1A, a single-crystal Si substrate 11 is prepared, and a porous Si layer 12 is formed on the surface of the single-crystal Si substrate 11 by anodizing. Referring to Fig. 1B, a non-porous
10 single-crystal Si layer 13 is epitaxially grown on the porous Si layer 12. With this process, a first substrate 10 is formed.

Referring to Fig. 1C, a second substrate 20 having an insulating layer (e.g., an SiO₂ layer) 15 formed on
15 the surface of a single-crystal Si substrate 14 is prepared. The first substrate 10 and the second substrate 20 are brought into contact with each other at room temperature such that the non-porous single-crystal Si layer 13 opposes the insulating layer 15. After this,
20 the first substrate 10 and the second substrate 20 are bonded by anode bonding, pressing, heating, or a combination thereof. With this process, the non-porous single-crystal Si layer 13 and the insulating layer 15 are firmly bonded. The insulating layer 15 may be formed
25 on the single-crystal Si substrate 14 side, as described above, on the non-porous single-crystal Si layer 13 as

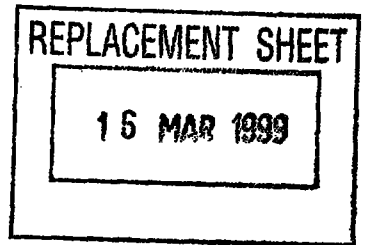
will be described later, or on both the single-crystal Si substrate 14 and the non-porous single-crystal Si layer 13 sides as far as the state shown in Fig. 1C is obtained by bringing the first and second substrates
5 into contact.

Referring to Fig. 1D, the two substrates bonded to each other are separated at the porous Si layer 12. The second substrate side (10" + 20) has a multilayered structure of a porous Si layer 12", single-crystal Si
10 layer 13, insulating layer 15, and single-crystal Si substrate 14. On the first substrate side (10'), a porous Si layer 12' is formed on the single-crystal Si substrate 11.

After separation, the remaining porous Si layer 12'
15 is removed from the substrate 10'. The surface of the substrate 10' is planarized, as needed, so the substrate 10' is used again as a single-crystal Si substrate 11 for forming a first substrate 10.

After the bonded substrate stack is separated, in
20 Fig. 1E, the porous layer 12" on the second substrate side (10" + 20) is selectively removed. With this process, a substrate having a multilayered structure of the single-crystal Si layer 13, insulating layer 15, and single-crystal Si substrate 14, i.e., an SOI structure
25 is obtained.


Figs. 41A to 41E are views for explaining another



method of manufacturing an SOI substrate according to the preferred embodiment of the present invention.

Referring to Fig. 41A, a single-crystal Si substrate 11 is prepared, and a porous Si layer 12 is
5 formed on the surface of the single-crystal Si substrate 11 by anodizing. Referring to Fig. 41B, a single-crystal Si layer 13 as a non-porous layer is epitaxially grown on the porous Si layer 12. After this, the surface of the single-crystal Si layer 13 is oxidized to form an
10 SiO₂ layer 15. With this process, a first substrate 10 is formed.

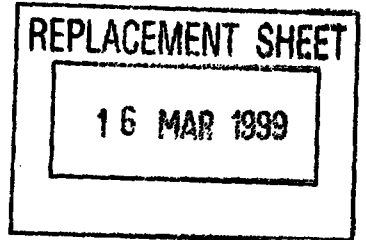Referring to Fig. 41C, a single-crystal Si substrate 14 is prepared as a second substrate 20. The first substrate 10 and the second substrate 20 are
15 brought into contact with each other at room temperature such that the SiO₂ layer 15 of the first substrate 10 opposes the second substrate 20. The first substrate 10 and the second substrate 20 are bonded by anode bonding, pressing, heating, or a combination thereof. With this
20 process, the second substrate 20 and the SiO₂ layer 15 are firmly bonded. The SiO₂ layer 15 may be formed on the single-crystal Si substrate 11 side, on the second substrate 20, as described above, or on both the single-crystal Si substrate 11 and the second substrate
25 20 sides as far as the state shown in Fig. 41C is obtained by bringing the first and second substrates



into contact.

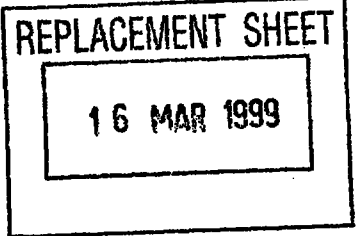
Referring to Fig. 41D, the two substrates bonded to each other are separated at the porous Si layer 12. The second substrate side has a multilayered structure of a porous Si layer 12", single-crystal Si layer 13, SiO₂ layer 15, and single-crystal Si substrate 14.. On the first substrate 10' side, the porous Si layer 12' is formed on the single-crystal Si substrate 11.

After separation, the remaining porous Si layer 12' is removed from the substrate 10'. The surface of the substrate 10' is planarized, as needed, so the substrate 10' is used again as a single-crystal Si substrate 11 for forming a first substrate 10.

After the bonded substrate stack is separated, in Fig. 41E, the porous layer 12" on the second substrate side (10" + 20) is selectively removed. With this process, a substrate having a multilayered structure of the single-crystal Si layer 13, insulating layer 15, and single-crystal Si substrate 14, i.e., an SOI structure is obtained.

As the second substrate, in addition to a single-crystal Si substrate, an insulating substrate (e.g., a substrate of silica glass) or a transparent substrate (e.g., a substrate of silica glass) can be used.

In this embodiment, to facilitate processing of



bonding two substrates and separating them, a porous Si layer 12 having a fragile structure is formed in the separation region. In place of the porous layer, a microcavity layer may be formed. A microcavity layer can
5 be formed by, e.g., implanting ions into a semiconductor substrate.

The substrate manufactured by the above manufacturing method can be applied not only to manufacture a semiconductor device but also to
10 manufacture a microstructure.

In this embodiment, in the step shown in Fig. 1D or 41D, i.e., in the step of separating the two substrates bonded to each other (to be referred to as a bonded substrate stack hereinafter), a separating apparatus for
15 selectively ejecting a high-pressure liquid or gas (fluid) to the porous Si layer as a separation region is used to separate the substrate stack into two substrates at the separation region.

[First Embodiment]

20 [Basic Arrangement of Separating Apparatus]

This separating apparatus uses the water jet method. Generally, the water jet method ejects a high-speed, high-pressure stream of water (when a hard object is to be cut, an abrasive is added to water) upon
25 an object to, e.g., cut or process a ceramic, a metal, a concrete, a resin, a rubber, or a wood member, remove a

coating film from the surface, or clean the surface
("Water Jet", Vol. 1, No. 1, page 4, (1984)).

Conventionally, the water jet method is used to perform
the above-described cutting, processing, remove a
5 coating film, or clean the surface mainly by partially
removing the material.

This separating apparatus ejects a high-speed,
high-pressure stream of fluid to the porous layer
(separation region) of the bonded substrate stack as a
10 fragile structure portion in the direction of substrate
surface to selectively break the porous layer, thereby
separating the substrate at the porous layer. The stream
will be referred to as a "jet" hereinafter. The fluid
forming a jet will be referred to as a "jet medium". As
15 the jet medium, it is possible to use an organic solvent
such as water or alcohol, an acid such as fluoric acid
or nitric acid, an alkali such as potassium hydroxide, a
gas such as air, nitrogen gas, carbonic acid gas, rare
gas, or an etching gas, or a plasma.

20 When this separating apparatus is to be applied to
manufacture a semiconductor device, e.g., separate a
bonded substrate stack, pure water with minimum impurity
metals or particles is preferably used as the jet
medium. However, since separation processing is a
25 perfect low-temperature process, water with high purity
need not always be used as the jet medium, and the

16 MAR 1999

substrate may be cleaned after completion of separation processing.

In this separating apparatus, a jet is ejected to the porous layer (separation region) exposed to the side surface of the bonded substrate stack, thereby removing the porous layer from the peripheral portion to the central portion. With this process, the bonded substrate stack is separated into two substrates by removing only the separation region with low mechanical strength without damaging the main body. Even when the side surface of the bonded substrate stack is covered with some thin layer, and the porous layer is not exposed, the thin layer can be removed by the jet, so the bonded substrate stack can be separated by the above-described method.

To separate the bonded substrate stack only by the cutting force of jet, a high pressure of several thousand kgf/cm² or more must be applied to the jet medium. In this case, the outer peripheral portion of the bonded substrate stack may be damaged, or the internal pressure of the separation region may increase to break the bonded substrate stack.

To avoid this situation, the pressure to be applied to the jet medium is preferably set to be as low as about 500 kgf/cm². When such a low-pressure jet is employed, the bonded substrate stack is separated by

16 MAR 1999

- 37 -

injecting the jet medium into the bonded substrate stack to expand and split it into two substrates rather than by colliding the jet against the porous layer to cut the porous layer by impact. Therefore, offcut is rarely
5 produced, and damages to substrates decrease. In addition, the jet medium need contain no abrasive.

At the peripheral portion of the bonded substrate stack, the effect for splitting the bonded substrate stack into two substrates effectively acts when a
10 V-shaped (concave) groove is formed in the bonded substrate stack along the side surface. Figs. 27A and 27B are views showing a force acting on the bonded substrate stack in the presence and absence of a V-shaped groove. Fig. 27A shows a bonded substrate stack
15 having a V-shaped groove 22. Fig. 27B shows a bonded substrate stack having no V-shaped groove.

As shown in Fig. 27A, in the bonded substrate stack having the V-shaped groove 22, a force (to be referred to as a separation force hereinafter) is applied outward
20 from the center of the bonded substrate stack, as indicated by an arrow 23. On the other hand, as shown in Fig. 27B, in the bonded substrate stack with a convex side surface, a force is applied inward from the side surface of the bonded substrate stack, as indicated by
25 an arrow 24. In the bonded substrate stack having a convex side surface, the separation force does not act

16 MAR 1999

- 38 -

unless the side surface of the porous layer 12 as the separation region is removed by a jet 21.

Even when a thin film is formed on the side surface of the bonded substrate stack, the separation force acts
5 on the bonded substrate stack as far as the bonded substrate stack has the V-shaped groove 22, as shown in Fig. 27A, so the thin layer can be easily broken.

To prevent damages to the substrates, the separation force in the axial direction of the bonded
10 substrate stack is preferably set to be several hundred gf/cm².

To effectively use the jet, a width W1 of the V-shaped groove 22 is preferably equal to or larger than a diameter d of the jet 21. For example, assume that
15 each of the first substrate (10) and the second substrate (20) has a thickness of about 1 mm, and the bonded substrate stack has a thickness of about 2 mm. Since the width W1 of the V-shaped groove 22 is normally around 1 mm, the diameter of the jet is preferably 1 mm
20 or less. Since a general water jet apparatus uses a jet with a diameter of approximately 0.1 to 0.5 mm, such a general water jet apparatus (e.g., a water jet nozzle) can be used.

The nozzle for ejecting a jet can have not only a
25 circular shape but any other shapes. For example, when a slit-like nozzle is employed to eject a jet having a

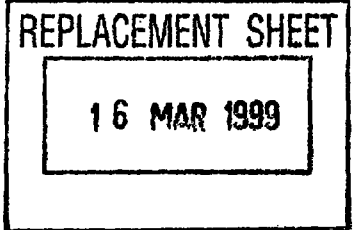
16 MAR 1999

- 39 -

long rectangular section, the jet can be efficiently injected into the separation region (inserted between the two substrates).

The jet ejection conditions are determined in accordance with the type of separation region (e.g., a porous layer) or the shape of the side surface of the bonded substrate stack. Important parameters as the jet ejection conditions are the pressure applied to the jet medium, the jet scanning speed, the width or diameter of the nozzle (the nozzle diameter is almost the same as the jet diameter), the nozzle shape, the distance between the nozzle and the separation region, and the flow rate of the jet medium.

The following techniques are used to separate the bonded substrate stack. 1) The jet is injected into the bonding interface parallel to the bonding interface while the nozzle is scanned along the bonding interface. 2) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is scanned. 3) The jet is injected into the bonding interface parallel to the bonding interface and simultaneously scanned in a fan shape at a pivot near the nozzle. 4) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is rotated about nearly the center of the bonded substrate stack (this technique



is particularly effective when the bonded substrate stack has a disk shape). The jet need not always be ejected to be perfectly parallel to the bonding interface.

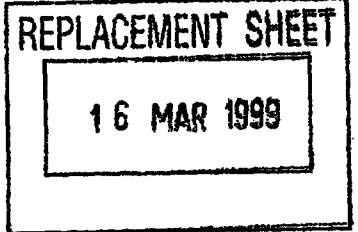
5 Fig. 2 is a view showing the schematic arrangement of a separating apparatus according to the first embodiment of the present invention. To separate a bonded substrate stack by a low-pressure jet, a separating apparatus 100 supports the bonded substrate stack such that the separation force efficiently acts on the bonded substrate stack. As a specific example, the separating apparatus 100 supports a bonded substrate stack such that the bonded substrate stack can expand at its central portion by the pressure of the jet medium injected into the bonded substrate stack. As another example, the separating apparatus 100 supports a bonded substrate stack such that the bonded substrate stack can corrugate by the pressure of the jet medium injected into the bonded substrate stack.

20 The separating apparatus 100 has substrate holding portions 120 and 150 having vacuum chuck mechanisms. A bonded substrate stack 101 is sandwiched by the substrate holding portions 120 and 150 and held. The bonded substrate stack 101 has a porous layer 101b as an internal fragile structure and is separated into two substrates 101a and 101c at the porous layer 101b by the

separating apparatus 100. In this separating apparatus 100, the bonded substrate stack is set such that the substrate 101a is placed on the first substrate (10') side in Fig. 1D or 41D and the substrate 101c is placed
5 on the second substrate (10" + 20) side in Fig. 1D or 41D.

The substrate holding portions 120 and 150 are present on the same rotary axis. The substrate holding portion 120 is coupled to one end of a rotary shaft 104
10 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate stack 101 vacuum-chucked by the
15 substrate holding portion 120. In separating the bonded substrate stack 101, the motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 150 is coupled to one
20 end of a rotary shaft 103 which is rotatably and slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the
25 rotary shaft 103, the bonded substrate stack 101 is pressed by the substrate holding portion 150.



The substrate holding portions 120 and 150 can be detached from the rotary shafts 104 and 103, respectively. The substrate holding portions 120 and 150 have one or a plurality of suction holes 181 and 182 as vacuum chuck mechanism, respectively. The suction holes 181 and 182 communicate with rotary seal portions 104a and 103a through the rotary shafts 104 and 103, respectively. The rotary seal portions 104a and 103a are coupled to vacuum lines 104b and 103b, respectively.

10 These vacuum lines 104b and 103b have solenoid valves. By controlling the solenoid valves, setting/removal of the bonded substrate stack 101 can be controlled.

The substrate holding portions 120 and 150 hold the bonded substrate stack 101 such that the separation force efficiently acts on the bonded substrate stack 101 in separation processing. Specific arrangements of the substrate holding portions 120 and 150 will be described later.

15

Substrate separation processing using this separating apparatus 100 will be described below.

20

To set the bonded substrate stack 101 in the separating apparatus 100, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the chucking surfaces of the substrate holding portions 120 and 150. After the bonded substrate stack 101 is mounted on an alignment shaft 113, the air

25

16 MAR 1999

cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 2). The alignment shaft 113 is rotatably axially supported by the support base 109 through bearings 105
5 and 107.

In this embodiment, the bonded substrate stack 101 is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate
10 stack 101 may be vacuum-chucked, as a matter of course. In separation processing, the air cylinder 112 is preferably controlled to maintain a predetermined interval between the substrate holding portions 120 and 150.

15 A jet medium (e.g., water) is sent from a pump 114 to a nozzle 102, and processing waits until the jet ejected from the nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet into the separation region of the bonded substrate stack
20 101. At this time, the bonded substrate stack 101 is rotated by the motor 110. The rotary shaft 104, substrate holding portion 120, bonded substrate stack 101, substrate holding portion 150, and rotary shaft 103 integrally rotate.

25 When the jet is injected, a separation force due to the pressure of the jet medium continuously injected

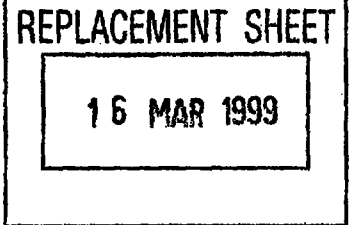
16 MAR 1999

into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. With this processing, the bonded substrate stack 101 is
5 separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation of the motor 110 and controlling the above-described
10 electromagnetic valves, the separated substrates are vacuum-chucked by the substrate holding portions 120 and 150.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water)
15 is cut off to split the two physically separated substrates to both sides.

When the separation force is to efficiently act on the bonded substrate stack 101, the structure of the substrate holding portions 120 and 150 must be
20 optimized. In this embodiment, the separation force is efficiently used by ensuring a space in which the bonded substrate stack deflects in separation processing. Preferable arrangements of substrate holding portions will be listed below. In the following examples, the
25 substrate holding portions 120 and 150 have a symmetrical structure. However, the substrate holding



portions 120 and 150 may have independent structures.

[First Example of Substrate Holding Portion]

Figs. 3 to 5 are views showing the arrangement of substrate holding portions according to the first
5 example of the present invention. Fig. 3 is a perspective view, Fig. 4 is a front view, and Fig. 5 is a sectional view. Substrate holding portions 121 and 151 shown in Figs. 3 to 5 are examples of the substrate holding portions 120 and 150 shown in Fig. 2,
10 respectively.

The substrate holding portions 121 and 151 of the first example have annular contact portions 121a and 151a which come into contact with the bonded substrate stack 101. With this structure, the bonded substrate
15 stack 101 can deflect having "nodes" at a portion sandwiched by the contact portions 121a and 151a and "antinodes" near the central and peripheral portions of the bonded substrate stack 101. In other words, the substrate holding portions 121 and 151 have a structure
20 in which the central portion of the bonded substrate stack 101 can expand in separation processing or a structure in which the bonded substrate stack 101 can corrugate in separation processing. When the substrate holding portions 121 and 151 having this structure are
25 employed, the separation force can efficiently act inside the bonded substrate stack 101.

16 MAR 1999

With the use of the substrate holding portions 121 and 151, separation progresses from the side surface portion of the bonded substrate stack 101 to the vicinity of the contact portions 121a and 151a in about 5 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). In about 2 min after the start of separation processing, the bonded substrate stack 101 warps outward at its central portion to form "antinodes" and is completely separated.

10 The outer diameter of each of the contact portions 121a and 151a is preferably, e.g., 30 to 50 mm. The inner diameter of each of the contact portions 121a and 151a can be smaller than the outer diameter by, e.g., approximately 10 mm. However, for easy deflection of the 15 substrate stack to be separated, the inner diameter of each of the contact portions 121a and 151a is preferably close to the outer diameter.

Any other substrate holding portion can provide the same effect as described above as far as it allows the 20 bonded substrate stack 101 to deflect forming "nodes" and "antinodes". Figs. 6 to 9 are front views showing modifications of the substrate holding portion according to the first example. Reference numerals 122a, 152a, 123a, 153a, 124a, 154a, 125a, and 155a denote contact 25 portions at which the substrate holding portions are in contact with the bonded substrate stack 101. Figs. 6 to


8 show examples of a contact portion having a polygonal shape with a hollow center. Fig. 9 shows an example of contact portion whose center is shifted from the center of the bonded substrate stack 101. These are examples of
5 a stripe-shaped contact portion.

[Second Example of Substrate Holding Portion]

Fig. 10 and 11 are views showing the arrangement of substrate holding portions according to the second example of the present invention. Fig. 10 is a front
10 view, and Fig. 11 is a sectional view. Substrate holding portions 126 and 156 shown in Figs. 10 and 11 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 126 of this example
15 has two annular contact portions 126a and 126b which come into contact with the bonded substrate stack 101. The substrate holding portion 156 has two annular contact portions 156a and 156b which come into contact with the bonded substrate stack 101. The substrate
20 holding portions 126 and 156 of this example are particularly suitable to process a substrate stack with a large size (e.g., 8 inches or more).

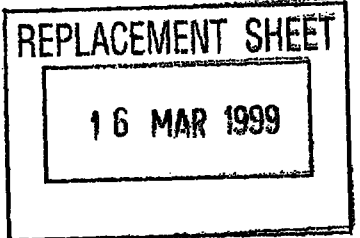With these substrate holding portions 126 and 156, the bonded substrate stack 101 can deflect having
25 "nodes" at a circumferential portion sandwiched by the contact portions 126a and 156a and a portion sandwiched




by the contact portions 126b and 156b, and "antinodes" near the intermediate portion between the contact portions and the peripheral portion of the bonded substrate stack 101.

5 When the substrate holding portions 126 and 156 having a structure in which the bonded substrate stack 101 deflects while corrugating or expanding near the central portion are employed, the separation force can efficiently act inside the bonded substrate stack 101.

10 With the use of the substrate holding portions 126 and 156, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the outer contact portions 126a and 156a in about 30 sec after the start of jet injection into the bonded
15 substrate stack 101 (separation processing). In about 30 sec after this, the bonded substrate stack 101 is separated to the outer contact portions 126b and 156b. In about 3 min after the start of separation processing, the bonded substrate stack 101 warps to form "nodes" and
20 "antinodes" and is completely separated.

 The widths of the contact portions (diameter difference) can be arbitrarily determined. However, for easy deflection of the substrate stack to be separated, the width of each contact portion is preferably small.

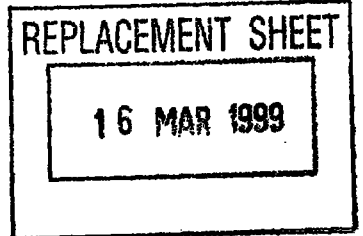25 In this example, two sets of contact portions are formed. However, three or more sets of contact portions




may be arranged.

[Third Example of Substrate Holding Portion]

Fig. 12 is a perspective view showing the arrangement of substrate holding portions according to the third example of the present invention. Substrate holding portions 127 and 157 shown in Fig. 12 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 127 and 157 of this example have a plurality of contact portions 127a and 157a which come into contact with the bonded substrate stack 101, respectively. Stated differently, this structure has annular contact portions 121a and 151a of the first example with grooves 127b and 157b which divide the contact portions 121a and 151a, respectively.

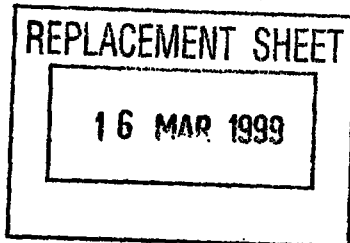The grooves 127b and 157b prevent the separation force from excessively acting in the vicinity of the central portion of the bonded substrate stack 101. More specifically, when the grooves 127b and 157b are formed, the jet medium injected into the central portion of the bonded substrate stack 101 can be appropriately discharged, so the jet medium pressure can be prevented from excessively increasing near the vicinity of the central portion. Therefore, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is



locally high and separation progresses slowly.

With the use of the substrate holding portions 127 and 157, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the contact portions 127a and 157a in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). In about 2 min after the start of separation processing, the bonded substrate stack 101 warps outward at its central portion to form "antinodes" and is completely separated.

Fig. 13 is a perspective view showing a modification of the substrate holding portions shown in Fig. 12. Substrate holding portions 128 and 158 shown in Fig. 13 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 128 of this modification has a plurality of columnar contact portions 128a forming a circle on a main body 128b. The substrate holding portion 158 has the same arrangement as that of the substrate holding portion 128. With the substrate holding portions 128 and 158 as well, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101, so the bonded substrate stack 101 can be prevented from breaking.

[Fourth Example of Substrate Holding Portion]


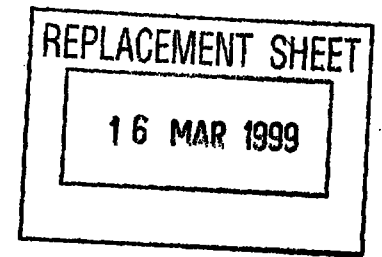


Fig. 14 is a perspective view showing the arrangement of substrate holding portions according to the fourth example of the present invention. Substrate holding portions 129 and 159 shown in Fig. 14 are
5 examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portion 129 of this example has two types of arcuated contact portions 129a and 129c which come into contact with the bonded substrate stack
10 101. To put it differently, the structure has the annular contact portions 126a and 126b of the second example with grooves 128b and 128d which divide the contact portions 126a and 126b, respectively. The substrate holding portion 159 has the same arrangement
15 as that of the substrate holding portion 129.

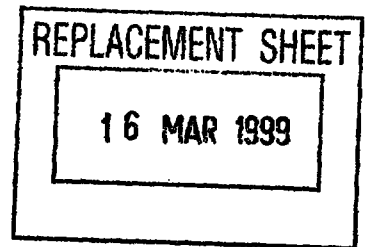With the use of the substrate holding portions 129 and 159, separation progresses from the side surface of the bonded substrate stack 101 to the vicinity of the outer contact portion 129a in about 30 sec after the
20 start of jet injection into the bonded substrate stack 101 (separation processing). In about 30 sec after this, the bonded substrate stack 101 is separated to the vicinity of the inner contact portion 129c. In about 3 min after the start of separation processing, the bonded
25 substrate stack 101 is completely separated while corrugating to form "nodes" and "antinodes".




By forming grooves 129b and 129d in the arcuated contact portions 129a and 129c, respectively (this also applies to the substrate holding portion 159), the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101. Hence, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

10 Fig. 15 is a perspective view showing a modification of the substrate holding portions shown in Fig. 14. Substrate holding portions 130 and 160 shown in Fig. 15 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

15 The substrate holding portion 130 of this modification has a plurality of columnar contact portions 130a forming double circles on a main body 130b. The substrate holding portion 160 has the same arrangement as that of the substrate holding portion 130. With the substrate holding portions 130 and 160 as well, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101, so the bonded substrate stack 101 can be prevented from breaking.

25 [Fifth Example of Substrate Holding Portion]

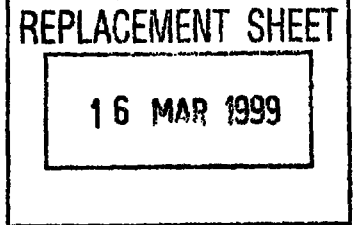 Figs. 16 and 17 are views showing the arrangement



of substrate holding portions according to the fifth example of the present invention. Fig. 16 is a perspective view, and Fig. 17 is a front view. Substrate holding portions 131 and 161 shown in Figs. 16 and 17 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 131 and 161 of this modification has a plurality of columnar contact portions 131a and 161a on main bodies 131b and 161b, respectively. With the substrate holding portions 131 and 161, the bonded substrate stack 101 can deflect and corrugate having "nodes" at a portion sandwiched by the contact portions 131a and 161a, so the separation force can efficiently act inside the bonded substrate stack 101. In addition, since the jet medium discharge path is ensured, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101. As a consequence, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

With the use of the substrate holding portions 131 and 161, the bonded substrate stack 101 is completely separated in about 2 min after the start of jet injection into the bonded substrate stack 101 (separation processing).

[Sixth Example of Substrate Holding Portion]

Figs. 18 and 19 are views showing the arrangement of substrate holding portions according to the sixth example of the present invention. Fig. 18 is a perspective view, and Fig. 19 is a front view. Substrate holding portions 132 and 162 shown in Figs. 18 and 19 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 132 and 162 of this example have cross-shaped (radial) contact portions 132a and 162a which come into contact with the bonded substrate stack 101, on main bodies 132b and 162b, respectively. With the substrate holding portions 132 and 162, the bonded substrate stack 101 can deflect and corrugate forming "nodes" at a portion sandwiched by the contact portions 132a and 162a, so the separation force efficiently acts on the bonded substrate stack 101. In addition, since the jet medium discharge path is ensured, the jet medium pressure can be prevented from excessively increasing inside the bonded substrate stack 101. Therefore, the bonded substrate stack 101 can be prevented from breaking because of a portion of the porous layer, where the mechanical strength is locally high and separation progresses slowly.

With the use of the substrate holding portions 132 and 162, the bonded substrate stack 101 is completely

16 MAR 1999

- 55 -

separated in about 80 sec after the start of jet injection into the bonded substrate stack 101 (separation processing).

Figs. 20 to 24 are perspective views showing modifications of the substrate holding portions shown in Fig. 19. These substrate holding portions are examples of the substrate holding portions 120 and 150 shown in Fig. 2.

Substrate holding portions 133 and 163 shown in Fig. 20 have star-shaped contact portions 133a and 163a which come into contact with the bonded substrate stack 101, on main bodies 133b and 163b, respectively.

Substrate holding portions 134 and 164 shown in Fig. 21 also have star-shaped contact portions 134a and 164a which come into contact with the bonded substrate stack 101, on main bodies 134b and 164b, respectively.

Substrate holding portions 135 and 165 shown in Fig. 22 have, on main bodies 135b and 165b, contact portions 135a and 165a which come into contact with the bonded substrate stack 101, respectively. Each of the contact portions 135a and 165a is separated into four parts at its central portion and form a cross. A substrate holding portion 136 shown in Fig. 23 has columnar contact portions 136a which come into contact with the bonded substrate stack 101, on a main body 136b. A substrate holding portion 166 has the same arrangement

16 MAR 1999

- 56 -

as that of the substrate holding portion 136. Substrate holding portions 137 and 167 shown in Fig. 24 have radial contact portions 137a and 167a which come into contact with the bonded substrate stack 101, on main bodies 137b and 167b, respectively.

[Seventh Example of Substrate Holding Portion]

Figs. 25 and 26 are sectional views showing the arrangement of substrate holding portions according to the seventh example of the present invention. Fig. 25 shows a state before the bonded substrate stack 101 is separated. Fig. 26 shows a state after the bonded substrate stack 101 is separated. Substrate holding portions 138 and 168 shown in Figs. 25 and 26 are examples of the substrate holding portions 120 and 150 shown in Fig. 2, respectively.

The substrate holding portions 138 and 168 of this example have, as contact portions to the bonded substrate stack 101, contact portions 138a and 168a which come into contact with the peripheral portions of the bonded substrate stack 101, respectively. With the substrate holding portions 138 and 168, the bonded substrate stack 101 can deflect while expanding at its central portion having "nodes" at a portion sandwiched by the contact portions 138a and 168a and "antinodes" near the central portion of the bonded substrate stack 101, so the separation force can efficiently act on the

bonded substrate stack 101.

The substrate holding portions 138 and 168 have, at their central portions, limit portions 137b and 167b for limiting the deflection amount of the bonded substrate
5 stack 101. Since the deflection amounts of the separated substrates are limited by the limit portions 137b and 167b, the substrates can be prevented from breaking.

In the first to sixth examples, the surface of the main body of each substrate holding portion can also
10 function as a deflection amount limit portion. In each example, the projection height of the contact portion to the bonded substrate stack is determined in accordance with the diameter and thickness of the bonded substrate stack and the jet medium pressure.


15 The above separating apparatus can be used to separate not only a semiconductor substrate such as a bonded substrate stack but also various samples.

According to the preferred embodiment of the present invention, the efficiency of separation
20 processing can be increased while preventing damages to the sample to be separated.

In addition, according to the preferred embodiment of the present invention, a satisfactory substrate can be manufactured.

25 [Second Embodiment]

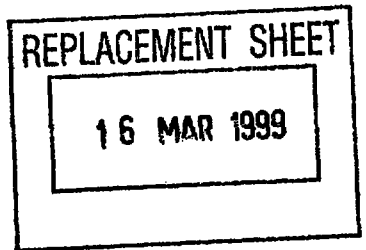
Fig. 28 is a view showing the schematic arrangement



of a separating apparatus according to the second embodiment of the present invention. In a separating apparatus 1000, the separation force is efficiently applied to a bonded substrate stack to separate the
5 bonded substrate stack using a low-pressure jet. At the same time, the bonded substrate stack is supported to prevent the bonded substrate stack from breaking due to the separation force. More specifically, the separating apparatus 1000 supports the bonded substrate stack while
10 allowing it to warp due to the pressure of the jet medium injected into the bonded substrate stack, and also limiting the warp amount.

The separating apparatus 1000 has substrate holding portions 1120 and 1150 having vacuum chuck mechanisms. A
15 bonded substrate stack 101 is sandwiched by the substrate holding portions 1120 and 1150 and held. The bonded substrate stack 101 has a porous layer 101b as an internal fragile structure and is separated into two substrates 101a and 101c at the porous layer 101b by the
20 separating apparatus 1000. In this separating apparatus 1000, the bonded substrate stack is set such that the substrate 101a is placed on the first substrate (10") side in Fig. 1D or 41D and the substrate 101c is placed on the second substrate (10" + 20) side in Fig. 1D or
25 41D.

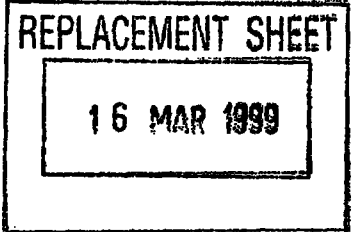
The substrate holding portions 1120 and 1150 are



present on the same rotary axis. The substrate holding portion 1120 is coupled to one end of a rotary shaft 104 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate stack 101 vacuum-chucked by the substrate holding portion 1120. In separating the bonded substrate stack 101, the motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 1150 is coupled to one end of a rotary shaft 103 which is rotatably and slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the rotary shaft 103, the bonded substrate stack 101 is pressed by the substrate holding portion 1150.

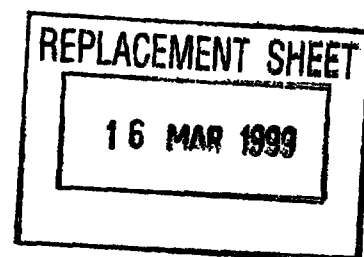The substrate holding portions 1120 and 1150 can be detached from the rotary shafts 104 and 103, respectively. The substrate holding portions 1120 and 1150 have one or a plurality of suction portions (e.g., annular grooves) 1181 and 1182 as vacuum chuck mechanisms, respectively. The suction portions 1181 and 1182 communicate with rotary seal portions 104a and 103a



through the rotary shafts 104 and 103, respectively. The rotary seal portions 104a and 103a are coupled to vacuum lines 104b and 103b, respectively. These vacuum lines 104b and 103b have solenoid valves. By controlling the solenoid valves, setting/removal of the bonded substrate stack 101 can be controlled.

The substrate holding portions 1120 and 1150 hold the bonded substrate stack 101 such that the separation force efficiently acts on the bonded substrate stack 101 in separation processing. Specific arrangements of the substrate holding portions 1120 and 1150 will be described later.

Substrate separation processing using this separating apparatus 1000 will be described below.

To set the bonded substrate stack 101 in the separating apparatus 1000, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the chucking surfaces of the substrate holding portions 1120 and 1150. After the bonded substrate stack 101 is mounted on an alignment shaft 113, the air cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 28). The alignment shaft 113 is rotatably axially supported by the support base 109 through bearings 105 and 107.

In this embodiment, the bonded substrate stack 101

is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate stack 101 may be vacuum-chucked, as a matter of course.

5 In separation processing, the air cylinder 112 is preferably controlled to maintain a predetermined interval between the substrate holding portions 1120 and 1150.

A jet medium (e.g., water) is sent from a pump 114
10 to a nozzle 102, and processing waits until the jet ejected from the nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet into the separation region of the bonded substrate stack 101. At this time, the bonded substrate stack 101 is
15 rotated by the motor 110. The rotary shaft 104, substrate holding portion 1120, bonded substrate stack 101, substrate holding portion 1150, and rotary shaft 103 integrally rotate.

When the jet is injected, a separation force due to
20 the pressure of the jet medium continuously injected into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. With this processing, the bonded substrate stack 101 is
25 separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated


into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation of the motor 110 and controlling the above-described electromagnetic valves, the separated substrates are
5 vacuum-chucked by the substrate holding portions 1120 and 1150.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water) is cut off to split the two physically separated
10 substrates to both sides.

When the separation force is to efficiently act on the bonded substrate stack 101 while preventing the bonded substrate stack 101 from breaking, the structure of the substrate holding portions 1120 and 1150 must be
15 optimized. In this embodiment, the separation force is efficiently applied by ensuring a space in which the bonded substrate stack warps in separation processing, and simultaneously, the warp amount is limited to prevent the bonded substrate stack 101 from breaking.

20 Preferable arrangements of the substrate holding portions will be listed below. In the following examples, a pair of substrate holding portions that oppose each other have a symmetrical structure. However, the substrate holding portions may have independent
25 structures.

[First Example of Substrate Holding Portion]



Figs. 29 to 31 are views showing the arrangement of the substrate holding portions 1120 and 1150 according to the first example of the second embodiment of the present invention. Fig. 29 is a perspective view, Fig. 30 is a sectional view showing a state before separation processing, and Fig. 31 is a sectional view showing a state during separation processing.

The substrate holding portions 1120 and 1150 of this example have convex support surfaces 1120a and 1150a each formed from part of a spherical surface. The support surfaces 1120a and 1150a support the bonded substrate stack 101 while allowing it to warp and also limit excessive warp of the bonded substrate stack 101 in separation processing. A warp amount h is preferably set to be around 0.1 to 0.5 mm.

With the use of the separating apparatus 1000 having the substrate holding portions 1120 and 1150, separation progress from the side surface of the bonded substrate stack 101 to the vicinity of the center of the support surfaces 1120a and 1150a in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). Two portions separated from the bonded substrate stack 101 are pressed against the support surfaces 1120a and 1150a by the pressure (separation force) of the jet medium injected into the bonded substrate stack 101, as shown

in Fig. 31. As separation processing further progresses, the bonded substrate stack 101 is completely separated in about 2 min after the start of separation processing.

When the bonded substrate stack 101 is held as it
5 is capable of warping, the separation force can be efficiently applied, so separation processing can be efficiently performed. In addition, when the warp amount of the bonded substrate stack 101 is limited, the separated substrates can be prevented from excessively
10 warping, and the bonded substrate stack 101 can be prevented from breaking.

To distribute stress acting on the bonded substrate stack 101, the support surfaces 1120a and 1150a are preferably spherical. However, the contact surfaces need
15 not always be spherical. As a modification of the substrate holding portions 1120 and 1150 of the first example, substrate holding portions each having a smooth convex surface will be described.

Figs. 32 to 35 are sectional views showing
20 modifications of the substrate holding portions 1120 and 1150. Substrate holding portions 1121 and 1151 shown in Fig. 32 have support surfaces 1121a and 1151a each made of a cone having a convex vertex. Substrate holding portions 1122 and 1152 shown in Fig. 33 have support
25 surfaces 1122a and 1152a each made of a frustum of a cone. Substrate holding portions 1123 and 1153 shown in


Fig. 34 have support surfaces 1123a and 1153a each made of several frustums forming a convex surface as a whole. Substrate holding portions 1124 and 1154 shown in Fig. 35 have support surfaces 1124a and 1154a each made of
5 several columns forming a convex surface as a whole.

As shown in Figs. 29 to 35, the substrate holding portion preferably has a diameter with which it can support the entire surface of the bonded substrate stack 101. When the diameter of the substrate holding portion
10 is 2/1 that of the bonded substrate stack 101 or more, a satisfactory effect can be obtained. However, the present invention does not exclude a substrate holding portion having a diameter smaller than 1/2 that of the bonded substrate stack.

15 The substrate holding portion preferably has a disk shape. However, any other shape such as a radial or matrix shape may be used.

[Second Example of Substrate Holding Portion]

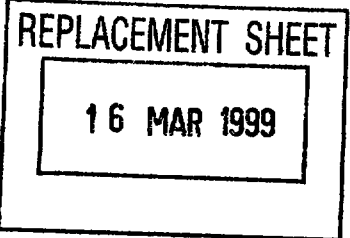
Figs. 36 and 37 are sectional views showing the arrangement of substrate holding portions according to
20 the second example of the second embodiment of the present invention. Fig. 36 shows a state before separation processing. Fig. 37 shows a state during separation processing. Substrate holding portions 1125
25 and 1155 shown in Figs. 36 and 37 replace the substrate holding portions 1120 and 1150 shown in Fig. 28,



respectively.

In the substrate holding portions 1125 and 1155 of this example, disk-like support portions 1125b and 1155b of an elastic material (e.g., a rubber) are bonded to
5 disk-like main bodies 1125a and 1155a, respectively. The support portions 1125b and 1155b support the bonded substrate stack 101 while allowing it to warp and also limit excessive warp of the bonded substrate stack 101 in separation processing. The warp amount h is
10 preferably set to be around 0.1 to 0.5 mm.

With the use of the separating apparatus 1000 having the substrate holding portions 1125 and 1155, separation progress from the side surface of the bonded substrate stack 101 to the vicinity of the central
15 portion in about 30 sec after the start of jet injection into the bonded substrate stack 101 (separation processing). Two portions separated from the bonded substrate stack 101 open to form a V shape due to the pressure (separation force) of the jet medium injected
20 into the bonded substrate stack 101, as shown in Fig. 37. At this time, the separation force and the drag of the support portions 1125b and 1155b balance with the warp amount of the bonded substrate stack 101. As separation processing further progresses, the bonded
25 substrate stack 101 is completely separated in about 2 min after the start of separation processing.



When the bonded substrate stack 101 is held as it is capable of warping, the separation force can be efficiently applied, so separation processing can be efficiently performed. In addition, when the warp amount
5 of the bonded substrate stack 101 is limited, the separated substrates can be prevented from excessively warping, and the bonded substrate stack 101 can be prevented from breaking.

To distribute stress acting on the bonded substrate
10 stack 101, the entire surfaces of the support portions 1125b and 1155b are preferably formed from an elastic material. However, the entire surfaces of the support portions need not always be made of an elastic material. In addition, the substrate holding portion preferably
15 has a diameter with which it can support the entire surface of the bonded substrate stack 101. When the diameter of the substrate holding portion is $2/1$ that of the bonded substrate stack 101 or more, a satisfactory effect can be obtained. Modifications of the substrate
20 holding portions 1125 and 1155 of this example will be listed below.

Figs. 38 to 40 are sectional views showing modifications of the substrate holding portions 1125 and 1155. In substrate holding portions 1126 and 1156 shown
25 in Fig. 38, annular second support portions 1126b and 1156b each consisting of an elastic material (e.g., a

rubber) are fitted on disk-like first support portions 1126a and 1156a each having a convex section. In substrate holding portions 1127 and 1157 shown in Fig. 39, O-ring-like second support portions 1127b and 1157b each consisting of an elastic material (e.g., a rubber) are fitted on disk-like first support portions 1127a and 1157a each having a convex section. In substrate holding portions 1128 and 1158 shown in Fig. 40, coil springs 1128b and 1158b each having one end coupled to a corresponding one of main bodies 1128a and 1158a are fitted on the main bodies 1128a and 1158a each having a convex section, and annular support portions 1128c and 1158c each coupled to the other end of a corresponding one of the coil springs 1128b and 1158b are also fitted on the main bodies 1128a and 1158a.

The above separating apparatus can be used to separate not only a semiconductor substrate such as a bonded substrate stack but also various samples.

According to the preferred embodiment of the present invention, the efficiency of separation processing can be increased while preventing damages to the sample to be separated.

In addition, according to the preferred embodiment of the present invention, a satisfactory substrate can be manufactured.

[Third Embodiment]

When this separating apparatus is to be applied to manufacture a semiconductor substrate such as the above-described SOI substrate, pure water or ultrapure water with minimum impurity metals or particles is preferably used as a jet medium. However, if the substrate is to be cleaned after separation, water having low purity may be used as a jet medium.

The jet medium is not limited to water. It is possible to use an organic solvent such as an alcohol, an acid such as fluoric acid or nitric acid, an alkali such as potassium hydroxide, a gas such as air, nitrogen gas, carbonic acid gas, rare gas, or an etching gas, or a plasma.

In this separating apparatus, a jet is ejected to the porous layer (separation region) exposed to the side surface of the bonded substrate stack, thereby removing the porous layer from the peripheral portion to the central portion. With this process, the bonded substrate stack is separated into two substrates by removing only the separation region with low mechanical strength without damaging the main body. Even when the side surface of the bonded substrate stack is covered with some thin layer, and the porous layer is not exposed, the thin layer can be removed by the jet, so the bonded substrate stack can be separated by the above-described method.

At the outer peripheral portion of the bonded substrate stack, a V-shaped (concave) groove is preferably formed along the side surface. Figs. 27A and 27B are views showing a force acting on the bonded
5 substrate stack. Fig. 27A shows a bonded substrate stack having a V-shaped groove 22. Fig. 27B shows a bonded substrate stack having no V-shaped groove.

As shown in Fig. 27A, in the bonded substrate stack having the V-shaped groove 22, a force (to be referred
10 to as a separation force hereinafter) is applied outward from the center of the bonded substrate stack, as indicated by an arrow 23. On the other hand, as shown in Fig. 27B, in the bonded substrate stack with a convex
15 surface of the bonded substrate stack, as indicated by an arrow 24. In the bonded substrate stack having a convex side surface, the separation force does not act unless the side surface of a porous layer 12 as the
separation region is removed by a jet 21.

20 Even when a thin film is formed on the side surface of the bonded substrate stack, the separation force acts on the bonded substrate stack as far as the bonded substrate stack has the V-shaped groove 22, as shown in Fig. 27A, so the thin layer can be easily broken.

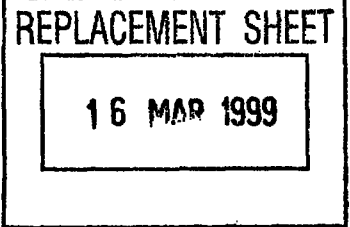
25 To effectively use the jet, a width W1 of the V-shaped groove 22 is preferably equal to or larger than

a diameter d of the jet 21. For example, assume that each of a first substrate (10) and a second substrate (20) has a thickness of about 1 mm, and the bonded substrate stack has a thickness of about 2 mm. Since the width W_1 of the V-shaped groove 22 is normally around 1 mm, the diameter of the jet is preferably 1 mm or less. Since a general water jet apparatus uses a jet with a diameter around 0.1 to 0.5 mm, such a general water jet apparatus (e.g., a water jet nozzle) can be used.

10 The nozzle for ejecting a jet can have not only a circular shape but any other shapes. For example, when a slit-like nozzle is employed to eject a jet having a long rectangular section, the jet can be efficiently injected into the separation region (inserted between
15 the two substrates).

 The jet ejection conditions are determined in accordance with the type of separation region (e.g., a porous layer) or the shape of the side surface of the bonded substrate stack. Important parameters as the jet
20 ejection conditions are the pressure applied to the jet medium, the jet scanning speed, the width or diameter of the nozzle (the nozzle diameter is almost the same as the jet diameter), the nozzle shape, the distance between the nozzle and the separation region, and the
25 flow rate of the jet medium.


 The following techniques are used to separate the



bonded substrate stack. 1) The jet is injected into the bonding interface parallel to the bonding interface while the nozzle is scanned along the bonding interface. 2) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is scanned. 3) The jet is injected into the bonding interface parallel to the bonding interface and simultaneously scanned in a fan shape at a pivot near the nozzle. 4) The jet is injected into the bonding interface parallel to the bonding interface while the bonded substrate stack is rotated about nearly the center of the bonded substrate stack (this technique is particularly effective when the bonded substrate stack has a disk shape). The jet need not always be ejected to be perfectly parallel to the bonding interface.

The bonded substrate stack is separated not only when the pore walls break by the cutting force, i.e., the impact force of the jet colliding against the pore walls in the porous layer but also when the pore walls break by the pressure of jet medium injected into the porous layer. To prevent damages to the substrate, the separation force acting in the axial direction of the bonded substrate stack is preferably set to be several hundred gf/cm².

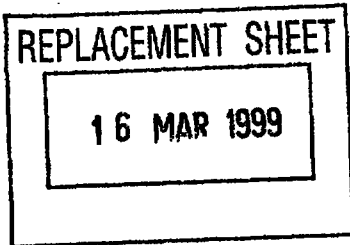
To separate the bonded substrate stack using only



the cutting force of jet, the jet must be ejected at a high pressure of 1,000 kg/cm² or more. If the bonded substrate stack is separated by such a high-pressure jet, the substrate may be damaged. The thickness of the bonded substrate stack is preferably about 0.5 to 1.0 mm. However, when such a thin bonded substrate stack is to be separated by a high-pressure jet, and the porous layer locally has portions with high strength, the jet pressure (separation force) may abruptly increase to break the substrate because the discharge path of the jet medium is not ensured.

Preferably, a jet with a low pressure of approximately 500 kgf/cm² is used, and the shortage of cutting force is compensated for by the separation force. With this method, damages to the substrate can be prevented at a relatively high ratio.

However, to prevent damages to the substrate, the shape or characteristics of the member to be separated is preferably taken into consideration. For example, when the bonded substrate stack is to be separated to the first substrate (10') side and the second substrate (10" + 20) side, the bonded substrate stack holding method in separation processing is preferably optimized in consideration of the shape or characteristics (especially, the strength) of the substrates. More specifically, the first substrate (10) is formed through




various processes (including high-temperature process)
such as anodizing, formation of an epitaxial layer, and
oxidation and therefore readily breaks as compared to
the second substrate (20). If the substrate is used
5 again as the first substrate (10) by removing the porous
layer remaining on the surface of the first substrate
after separation, the first substrate becomes thinner by
about 30 μm every time an SOI substrate is manufactured.
For this reason, as the number of times of reuse
10 increases, the first substrate breaks during separation
processing with higher probability.

In this embodiment, a separating apparatus is
disclosed, in which the deflection amount by the
separation force of the jet is made small for one of
15 members to be separated, which has low strength and
readily breaks, to prevent the member from breaking, and
the deflection amount by the separation force of the jet
is made large for a member which has high strength and
hardly breaks to increase the efficiency of discharging
20 the jet medium from the separation region (inside the
member).

[Arrangement of Separating Apparatus]


A specific arrangement of the separating apparatus
according to the third embodiment of the present
25 invention will be described below with reference to
Figs. 42 to 44.



The separating apparatus of this embodiment is suitable to separate a bonded substrate stack having a porous layer or microcavity layer as an internal fragile structure. This separating apparatus can also be used to
5 separate another member having an internal fragile structure. In this case, the building elements of the separating apparatus must obviously be appropriately modified in accordance with the shape of the member to be separated.

10 Fig. 42 is a view schematically showing the arrangement of the separating apparatus according to the third embodiment of the present invention. Fig. 43 is a perspective view showing part of the separating apparatus shown in Fig. 42. Fig. 44 is a view
15 schematically showing separation processing.


A separating apparatus 2000 has substrate holding portions 2120 and 2130 having vacuum chuck mechanisms. A bonded substrate stack 101 is sandwiched by the substrate holding portions 2120 and 2130 and held. The
20 substrate holding portion 2120 comes into contact with the bonded substrate stack 101 in a large area. The substrate holding portion 2130 comes into contact with the bonded substrate stack 101 in a small area. With this structure, the deflection amount becomes small or
25 no deflection occurs on one side of the bonded substrate stack 101 while the deflection amount in separation



processing is made relatively large on the other side.

The bonded substrate stack 101 has a porous layer 101b as an internal fragile structure and is separated into a first substrate 101a and a second substrate 101c
5 at the porous layer 101b by the separating apparatus 2000. The first substrate 101a corresponds to the above-described first substrate (10'), and the second substrate 101c corresponds to the above-described second substrate (10" + 20).

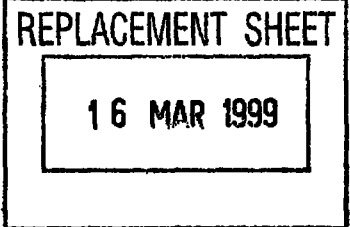10 As described above, the first substrate 101a is formed through various processes (including high-temperature process) such as anodizing, formation of an epitaxial layer, and oxidation and therefore readily breaks as compared to the second substrate 101c.
15 Therefore, when the first substrate 101a of the bonded substrate stack 101 is held by the substrate holding portion 2120 having a large-area holding surface, deflection of the first substrate 101a can be limited during separation processing and prevented from
20 breaking. The second substrate 101c has a strength higher than that of the first substrate 101a and can withstand relatively large deflection. When the second substrate 101c is held by the substrate holding portion 2130 having a small-area holding surface, the substrate
25 101c can deflect to some extent in separation processing. With this structure, the jet medium injected




between the substrates 101a and 101c can be efficiently discharged, and consequently, separation processing can be efficiently performed.

The substrate holding portion 2120 is coupled to
5 one end of a rotary shaft 104 which is rotatably axially supported by a support base 109 through a bearing 108. The other end of the rotary shaft 104 is coupled to the rotary shaft of a motor 110. The rotational force generated by the motor 110 rotates the bonded substrate
10 stack 101. The motor 110 rotates the rotary shaft 104 at a designated rotation speed in accordance with an instruction from a controller (not shown).

The substrate holding portion 2130 is coupled to one end of a rotary shaft 103 which is rotatably and
15 slidably axially supported by the support base 109 through a bearing 111. The other end of the rotary shaft 103 is coupled to an air cylinder 112 fixed on the support base 109. When the air cylinder 112 pushes the rotary shaft 103, the bonded substrate stack 101 is
20 pressed by the substrate holding portion 2130.

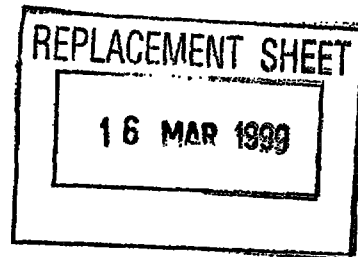To limit the deflection amount of the first substrate 101a to an amount as small as possible, the diameter of the chucking surface of the substrate holding portion 2120 is preferably made equal to or
25 larger than the diameter of the bonded substrate stack 101, and additionally, the chucking surface is



preferably made flat to support the entire surface of the first substrate 101a. However, the shape of the chucking surface of the substrate holding portion 2120 is not limited to this. The chucking surface may be a
5 curved surface such as a spherical surface or have a smaller area than the bonded substrate stack 101. That is, the shape of the chucking surface of the substrate holding portion 2120 is determined in accordance with the allowable deflection amount of the first substrate
10 101a.

On the other hand, the shape of the chucking surface of the substrate holding portion 2130 is determined within the allowable deflection amount range of the second substrate 101c such that the deflection
15 amount of the second substrate 101c becomes larger than that of the first substrate 101a.

The substrate holding portions 2120 and 2130 are present on the same rotary axis. The substrate holding portions 2120 and 2139 can be detached from the rotary
20 shafts 104 and 103, respectively. The substrate holding portions 2120 and 2130 have vacuum chucking grooves on their holding surfaces. These grooves communicate with vacuum lines extending through the rotary shafts 104 and 103, respectively. These vacuum lines are coupled to
25 external vacuum lines through, e.g., rotary vacuum joints. The external vacuum lines have solenoid valves.

By controlling the solenoid valves, setting/removal of the substrate stack can be controlled.

Substrate separation processing using this separating apparatus 2000 will be described below.

5 To set the bonded substrate stack 101 in the separating apparatus 2000, first, the rotary shaft 103 is retracted by the air cylinder 112 to set a predetermined interval between the holding surfaces of the substrate holding portions 2120 and 2130. After the
10 bonded substrate stack 101 is mounted on an alignment shaft 113, the air cylinder 112 pushes the rotary shaft 103, so the bonded substrate stack 101 is pressed and held (the state shown in Fig. 42). The alignment shaft 113 is rotatably axially supported through bearings 105
15 and 107.

 In this embodiment, the bonded substrate stack 101 is held not by vacuum chucking but by the pressing force of the air cylinder 112. The pressing force is preferably about 100 to 2000gf. The bonded substrate
20 stack 101 may be vacuum-chucked, as a matter of course.

 A jet medium (e.g., water) is sent from a pump 114 to a jet nozzle 102, and processing waits until the jet ejected from the jet nozzle 102 stabilizes. When the jet stabilizes, a shutter 106 is opened to inject the jet
25 into the separation region of the bonded substrate stack 101, and at the same time, the bonded substrate stack

16 MAR 1999

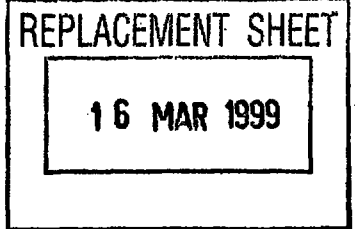
- 80 -

101 is rotated by the motor 110. At this time, the rotary shaft 104, substrate holding portion 2120, bonded substrate stack 101, substrate holding portion 2130, and rotary shaft 103 integrally rotate. The jet nozzle 102 is attached to a position adjustment mechanism (e.g., an X-Y stage), so the position from which the jet is injected into the bonded substrate stack 101 can be adjusted by the position adjustment mechanism.

When the jet is injected, a separation force due to the pressure of jet medium continuously injected into the porous layer 101b as a fragile structure acts on the bonded substrate stack 101 to break the porous layer 101b which connects the substrates 101a and 101c. At this time, the substrates 101a and 101c deflect in the allowable ranges of the substrate holding portions 2120 and 2130. In this separating apparatus 2000, the deflection amount of the substrate 101a is relatively small, and that of the substrate 101c is relatively large.

With this processing, the bonded substrate stack 101 is separated into two substrates in about 2 min.

When the bonded substrate stack 101 is separated into two substrates, the shutter 106 is closed, and the operation of pump 114 is stopped. By stopping rotation of the motor 110 and controlling the above-described electromagnetic valves, the separated substrates 101a



and 101c are vacuum-chucked by the substrate holding portions 2120 and 2130.

When the air cylinder 112 retracts the rotary shaft 103, the surface tension of the jet medium (e.g., water) is cut off to split the two physically separated substrates 101a and 101c to both sides.


Modifications of the substrate holding portion of the separating apparatus 2000 will be described next.

[First Modification]

10 In the separating apparatus of this modification, the substrate holding portions 2120 and 2130 of the separating apparatus 2000 shown in Figs. 42 to 44 are replaced with each other. Fig. 45 is a view showing the schematic arrangement of a separating apparatus 2000' of
15 this modification.

In this separating apparatus 2000', the substrate holding portion 2120 holds the first substrate 101a side of the bonded substrate stack 101, and the substrate holding portion 2130 holds the second substrate 101c.
20 That is, in the separating apparatus 2000', the bonded substrate stack 101 is held such that the second substrate 101c is positioned on the side of the rotary shaft 104 whose horizontal position is fixed.

This separating apparatus 2000' is suitable to
25 reuse the first substrate 101a after separation as the first substrate (10) by removing the porous layer 101b




remaining on the surface of the substrate 101a. The reason for this is as follows.

When the first substrate 101a is to be reused, the first substrate 101a becomes thinner in accordance with
5 the number of times of reuse. For this reason, when separation processing is to be efficiently and appropriately performed in the separating apparatus 2000 shown in Fig. 42, the jet nozzle 102 must be located immediately above the separation region of the bonded
10 substrate stack 101 for every separation processing. If the position of the jet nozzle 102 is fixed, the jet may not be injected into the center of the porous layer 101b to damage the substrates 101a and 101c.

However, in the separating apparatus 2000' of this
15 modification, as far as the bonded substrate stack 101 whose second substrate 101c has a predetermined thickness is to be processed, the positional relationship between the porous layer 101b and the jet nozzle 102 does not change even when the position of the
20 jet nozzle 102 is fixed. This is because the position of the substrate holding portion 2130 is fixed, and the second substrate 101c held by the substrate holding portion 2130 has a predetermined thickness.

[Second Modification]

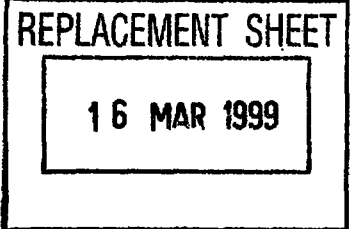25 In this modification, the structure of each substrate holding portion of the separating apparatus



2000 shown in Figs. 42 to 44 is modified. Fig. 46 is a view showing the schematic arrangement of the substrate holding portions of the separating apparatus of this modification. In this separating apparatus, a substrate
5 holding portion 2121 having an almost circular chucking surface holds the first substrate 101a side of the bonded substrate stack 101, and a substrate holding portion 2131 having an almost annular chucking surface holds the second substrate 101c side of the bonded
10 substrate stack 101.

The substrate holding portions 2121 and 2131 of this modification limit the deflection amounts of the first substrate 101a and that of the second substrate 101c in the allowable deflection amount ranges,
15 respectively, and increase the efficiency of separation processing while preventing damages to the substrates 101a and 101c.

Since the diameter of the substrate holding portion 2121 is smaller than the bonded substrate stack 101, the
20 first substrate 101a deflects while warping at its outer peripheral portion in separation processing. The holding surface of the substrate holding portion 2121 may be a flat surface or a curved surface such as a spherical surface. On the other hand, since the substrate holding
25 portion 2131 has an annular holding surface, the substrate 101c deflects while corrugating forming

"nodes" near the chucking surface (701 and 702 in Fig. 46) and "antinodes" at the outer peripheral portion and central portion. When the substrate holding portions 2121 and 2131 with shapes allowing the second substrate 101c to deflect while corrugating are employed, the jet medium injected into the bonded substrate stack 101 can be efficiently discharged.

Separation processing was executed using this separating apparatus. After the jet was injected into the bonded substrate stack 101, the jet proceeded to the holding surface (701 in Fig. 46) of the substrate holding portion 2131 in about 30 sec. After this, the jet proceeded to the holding surface (702 in Fig. 46) on the opposite side after about 30 sec, and the substrate 101c deflected while corrugating, as shown in Fig. 46. The bonded substrate stack 101 was separated into two substrates in about 3 min.

In separation processing of the bonded substrate stack 101, the jet medium is hardly discharged at the central portion of bonded substrate stack. For this reason, the pressure of the jet medium readily increases, so the central portion is easily damaged as compared to the peripheral portion. Hence, when only the second substrate 101c with high strength is allowed to deflect while expanding to the substrate holding portion 2131 side at its central portion, as in the substrate

16 MAR 1999

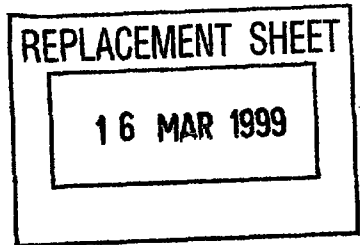
holding portions of this modification, the discharge path of the jet medium can be ensured while preventing damages to the first substrate 101a with low strength.

[Third Modification]

5 In this modification, the structures of the substrate holding portions 2120 and 2130 of the separating apparatus 2000 shown in Figs. 42 to 44 are modified. Fig. 47 is a view showing a modification of the substrate holding portion 2120 for holding the first
10 substrate side. Fig. 48 is a view showing a modification of the substrate holding portion 2130 for holding the second substrate side.

 As shown in Fig. 47, a substrate holding portion 2122 for holding the first substrate 101a side has a
15 diameter slightly smaller than that of the bonded substrate stack 101 and a flat chucking surface. Therefore, the first substrate 101a deflects while warping at its outer peripheral portion in separation processing.

20 On the other hand, as shown in Fig. 48, a substrate holding portion 2132 has a plurality of projecting chuck portions 2132a. The second substrate 101c side of the bonded substrate stack 101 is held by the tips of the plurality of chuck portions 2132a. When the second
25 substrate 101c side is held by the projecting suction portions 2132a, the substrate 101c can easily deflect,



and the jet medium injected into the bonded substrate stack 101 can be efficiently discharged. To stably hold the bonded substrate stack 101, the number of projecting chuck portions 2132a is preferably three or more.

5 The present invention is not limited to the above embodiments and various changes and modifications can be made within the spirit and scope of the present invention. Therefore, to apprise the public of the scope of the present invention, the following claims are made.

This Sheet Has Been Replaced



- 87 -

REPLACEMENT SHEET

16 MAR 1999

WHAT IS CLAIMED IS:

1. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:
 - 5 a jet unit for ejecting a fluid to the sample; and
 - a pair of holding portions opposing each other to sandwich and hold the sample,
 - wherein said pair of holding portions hold the
 - 10 sample to allow the sample to expand at a vicinity of a central portion due to a pressure of the fluid ejected from said jet unit and injected into the sample.
2. A separating apparatus for separating a plate-like sample having an internal fragile layer at
- 15 the fragile layer comprising:
 - a jet unit for ejecting a fluid to the sample; and
 - a pair of holding portions opposing each other to sandwich and hold the sample,
 - 20 wherein said pair of holding portions hold the sample which can corrugate due to a pressure of the fluid ejected from said jet unit and injected into the sample.
3. The apparatus according to claim 1 or 2, wherein
- 25 at least one of said pair of holding portions has a hollow contact portion, and the sample is held by

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 88 -

REPLACEMENT SHEET

16 MAR 1999

bringing said contact portion into contact with the sample.

4. The apparatus according to claim 3, wherein said contact portion comprises a multiple of contact portions.

5 5. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.

10 6. The apparatus according to claim 5, wherein said contact portion comprises a multiple of contact portions.

7. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing said contact portion into contact with the sample.

8. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of arcuated contact portions, and the sample is held by bringing said contact portion into contact with the sample.

9. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing said contact portion into contact with the sample.

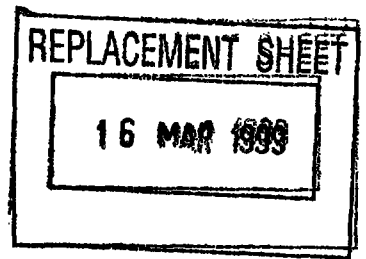
THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 89 -




10. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has a radial contact portion, and the sample is held by bringing said contact portion into contact with the
- 5 sample.
11. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held
- 10 by bringing said contact portion into contact with the sample.
12. The apparatus according to claim 11, wherein said contact portion can contact the whole peripheral portion of the sample.
- 15 13. The apparatus according to any one of claims 1 to 12, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.
14. The apparatus according to any one of claims 1 to
- 20 13, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.
15. The apparatus according to claim 14, wherein in separating the sample by the fluid, said adjustment
- 25 mechanism presses the sample to adjust the interval between said pair of holding portions.

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 90 -

REPLACEMENT SHEET

16 MAR 1999

16. The apparatus according to claim 14, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.

5 17. The apparatus according to any one of claims 1 to 16, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

18. The apparatus according to any one of claims 1 to 17, wherein the sample comprises a substrate having a
10 porous layer as the fragile layer.

19. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

15 a pair of holding portions opposing each other to sandwich and hold the sample,


wherein said pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central portion due to a pressure of a fluid ejected
20 from a jet unit arranged in said separating apparatus and injected into the sample.

20. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at
25 the fragile layer comprising:

a pair of holding portions opposing each other to

THIS SHEET HAS BEEN
REPLACED





sandwich and hold the sample,

wherein said pair of holding portions hold the sample to allow the sample to corrugate due to a pressure of a fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample.

21. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has a hollow contact portion, and the sample is held by bringing said contact portion into contact with the sample.

22. The apparatus according to claim 21, wherein said contact portion comprises a multiple of contact portions.

23. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.

24. The apparatus according to claim 23, wherein said contact portion comprises a multiple of contact portions.

25. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing said contact portion into contact with the sample.

26. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or

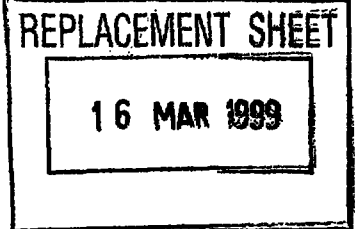
THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 92 -



a plurality of arcuated contact portions, and the sample is held by bringing said contact portion into contact with the sample.

27. The apparatus according to claim 19 or 20, wherein
5 at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing said contact portion into contact with the sample.

28. The apparatus according to claim 19 or 20, wherein
10 at least one of said pair of holding portions has a radial contact portion, and the sample is held by bringing said contact portion into contact with the sample.


29. The apparatus according to claim 19 or 20, wherein
15 at least one of said pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing said contact portion into contact with the sample.

20 30. The apparatus according to claim 29, wherein said contact portion can contact the whole peripheral portion of the sample.

31. The apparatus according to any one of claims 19 to
30, further comprising a rotary mechanism for rotating
25 said holding portion about a shaft perpendicular to a surface of the sample.

THIS SHEET HAS BEEN
REPLACED





16 MAR 1999

32. The apparatus according to any one of claims 19 to 31, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

5 33. The apparatus according to claim 32, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval between said pair of holding portions.

10 34. The apparatus according to claim 32, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.

35. The apparatus according to any one of claims 19 to 34, wherein each of said pair of holding portions has a 15 chuck mechanism for vacuum-chucking the sample.

36. The apparatus according to any one of claims 19 to 35, wherein the sample comprises a substrate having a porous layer as the fragile layer.

20 37. A separating method of separating a plate-like sample having an internal fragile layer at the fragile layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 1 to 18;

25 separating the sample at the fragile layer by said separating apparatus; and

receiving the separated samples from said

THIS SHEET HAS BEEN
REPLACED





16 MAR 1999

separating apparatus.

38. The method according to claim 37, wherein water is used as the fluid to be ejected from said jet unit.

39. A separating method of separating a substrate at a
5 porous layer, the substrate being formed by bonding a non-porous layerside of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein said separating apparatus of any one of claims 1 to 18
10 is used for separation.

40. A substrate manufacturing method comprising the step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
15 layer are sequentially formed on one surface, to a second substrate; and

separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of
20 claims 1 to 18 is used in the separation step.


41. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

a jet unit for ejecting a fluid to the sample; and
25 a pair of holding portions opposing each other to sandwich and hold the sample,

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 95 -

REPLACEMENT SHEET

16 MAR 1999

wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts by a pressure of the fluid ejected from said jet unit and injected into the sample and simultaneously limit a
5 warp amount.

42. The apparatus according to claim 41, wherein at least one of said pair of holding portions has a smooth convex support surface, and the sample is held by said support surface.

10 43. The apparatus according to claim 42, wherein said support surface substantially comprises part of a spherical surface.

44. The apparatus according to claim 42, wherein said support surface comprises a surface formed by a cone
15 with a convex vertex.

45. The apparatus according to claim 42, wherein said support surface substantially comprises a surface formed by a frustum of a cone.

46. The apparatus according to claim 42, wherein said
20 support surface comprises a smooth convex surface formed by a stack of several frustums.

47. The apparatus according to claim 42, wherein said support surface comprises a convex surface formed by a stack of several columns.

25 48. The apparatus according to claim 41, wherein at least one of said pair of holding portions includes an

THIS SHEET HAS BEEN
REPLACED





16 MAR 1999

elastic member and deforms due to a force inflicted by the sample.

49. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
5 partially consisting of an elastic material, and the sample is held by said support portion.

50. The apparatus according to claim 41, wherein at least one of said holding portions has an elastic member at a portion which can contact the sample.

10 51. The apparatus according to claim 41, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

52. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
15 coupled to a main body via an elastic member.

53. The apparatus according to any one of claims 41 to 52, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

20 54. The apparatus according to any one of claims 41 to 53, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

55. The apparatus according to claim 54, wherein in
25 separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval

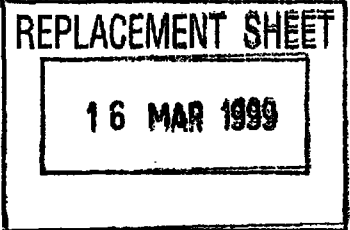
THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 97 -




between said pair of holding portions.

56. The apparatus according to claim 54, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval
- 5 between said pair of holding portions.
57. The apparatus according to any one of claims 41 to 56, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.
58. The apparatus according to any one of claims 41 to
- 10 57, wherein the sample comprises a substrate having a porous layer as the fragile layer.
59. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at
- 15 the fragile layer comprising:
- a pair of holding portions for sandwiching and holding the sample,
- wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts
- 20 by a pressure of the fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample and simultaneously limit a warp amount.
60. The apparatus according to claim 59, wherein at least one of said pair of holding portions has a smooth
- 25 convex support surface, and the sample is held by said support surface.

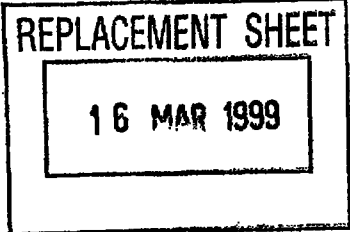THIS SHEET HAS BEEN
REPLACED





61. The apparatus according to claim 60, wherein said support surface substantially comprises part of a spherical surface.
62. The apparatus according to claim 60, wherein said
5 support surface comprises a surface formed by a cone with a convex vertex.
63. The apparatus according to claim 60, wherein said support surface substantially comprises a surface formed by a frustum of a cone.
- 10 64. The apparatus according to claim 60, wherein said support surface comprises a smooth convex surface formed by a stack of several frustums.
65. The apparatus according to claim 60, wherein said support surface comprises a convex surface formed by a
15 stack of several columns.
66. The apparatus according to claim 59, wherein at least one of said pair of holding portions includes an elastic member and deforms due to a force inflicted by the sample.
- 20 67. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion partially consisting of an elastic material, and the sample is held by said support portion.
68. The apparatus according to claim 59, wherein at
25 least one of said holding portions has an elastic member at a portion which can contact the sample.

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 99 -

REPLACEMENT SHEET

16 MAR 1999

69. The apparatus according to claim 59, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

70. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion coupled to a main body via an elastic member.

71. The apparatus according to any one of claims 59 to 70, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

72. The apparatus according to any one of claims 59 to 71, further comprising an adjustment mechanism for adjusting an interval between said pair of holding portions.

73. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the interval between said pair of holding portions.

74. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant interval between said pair of holding portions.

75. The apparatus according to any one of claims 59 to 74, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

76. The apparatus according to any one of claims 59 to

THIS SHEET HAS BEEN
REPLACED





16 MAR 1999

75, wherein the sample comprises a substrate having a porous layer as the fragile layer.

77. A separating method of separating a plate-like sample having an internal fragile layer at the fragile
5 layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 41 to 58;

separating the sample at the fragile layer by said separating apparatus; and

10 receiving the separated samples from said separating apparatus.

78. The method according to claim 77, wherein water is used as the fluid to be ejected from said jet unit.

79. A separating method of separating a substrate at a
15 porous layer, the substrate being formed by bonding a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein
said separating apparatus of any one of claims 41

20 to 58 is used for separation.

80. A substrate manufacturing method comprising the step of:


bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
25 layer are sequentially formed on one surface, to a second substrate; and



This Sheet Has Been Replaced



- 101 -



separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of claims 41 to 58 is used in the separation step.

5 81. A separating apparatus for separating a plate-like sample comprising:

a jet unit for ejecting a fluid for separating the sample to the sample; and

first and second holding portions for sandwiching
10 and holding the sample,

wherein said first and second holding portions have holding surfaces with different shapes.

82. The apparatus according to claim 81, wherein said first holding portion holds one surface of the sample to
15 make a deflection amount of the one surface due to a pressure of the fluid injected into the sample relatively small, and said second holding portion holds the other surface of the sample to make a deflection amount of the other surface due to the pressure of the
20 fluid relatively large.

83. The apparatus according to claim 81, wherein said first holding portion holds one surface of the sample not to cause the one surface to deflect due to a pressure of the fluid injected into the sample, and said
25 second holding portion holds the other surface of the sample to cause the other surface to deflect due to the

THIS SHEET HAS BEEN
REPLACED





16 MAR 1999

pressure of the fluid.

84. The apparatus according to any one of claims 81 to 83, wherein the holding surface of said first holding portion and the holding surface of said second holding
5 portion have different areas.

85. The apparatus according to any one of claims 81 to 84, wherein said first holding portion has a holding surface for wholly holding one surface of the sample, and said second holding portion has a holding surface
10 for partially holding the other surface of the sample.

86. The apparatus according to any one of claims 81 to 85, wherein the holding surface of said first holding portion comprises a flat surface.

87. The apparatus according to any one of claims 81 to 85, wherein the holding surface of said first holding
15 portion comprises a curved surface.

88. The apparatus according to any one of claims 81 to 87, wherein the holding surface of said second holding portion is annular.

89. The apparatus according to any one of claims 81 to 87, wherein said second holding portion has a plurality of projecting members, and the sample is held by tips of said plurality of projecting members.

90. The apparatus according to any one of claims 81 to 87, wherein said second holding portion has a shape
25 allowing the sample to deflect while expanding at a

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 103 -

REPLACEMENT SHEET

16 MAR 1999

central portion on a side of said second holding portion due to the pressure of the fluid injected into the sample.

91. The apparatus according to any one of claims 81 to 5 87, wherein said second holding portion has a shape allowing the sample to deflect and corrugate on a side of said second holding portion due to the pressure of the fluid injected into the sample.

92. The apparatus according to any one of claims 81 to 10 91, further comprising a rotary mechanism for rotating at least one of said first and second holding portions about a shaft perpendicular to the holding surface to rotate the sample.

93. The apparatus according to any one of claims 81 to 15 92, wherein the sample to be processed comprises a substrate formed by bonding first and second substrates, and the first and second substrates have different strengths.


94. A separating method of separating a plate-like 20 sample comprising holding the sample by sandwiching the sample by a pair of holding portions having holding surfaces with different shapes, and ejecting a fluid to a predetermined position in a direction of thickness of the sample, thereby separating the sample.

25 95. The method according to claim 94, wherein the sample to be separated has an internal fragile layer,

THIS SHEET HAS BEEN
REPLACED



* C L M S *



and in separating the sample, the fluid is ejected to the fragile layer.

96. A separating method of separating a plate-like sample having an internal fragile layer at the fragile
5 layer comprising:

the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

wherein in the separation step, one surface of the sample is held to make a deflection amount due to a
10 pressure of the fluid injected into the sample relatively small and the other surface of the sample is held to make a deflection amount due to the pressure of the fluid injected into the sample relatively large.

97. A separating method of separating a plate-like
15 sample having an internal fragile layer at the fragile layer comprising:

the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

wherein in the separation step, one surface of the
20 sample is held to limit deflection due to a pressure of the fluid injected into the sample and the other surface of the sample is held to allow deflection due to the pressure of the fluid injected into the sample.

98. The method according to any one of claims 94 to 97,
25 further comprising rotating the sample about a shaft perpendicular to a major surface of the sample in





16 MAR 1999

separating the sample by the fluid.

99. The method according to any one of claims 94 to 98,
wherein the sample to be processed comprises a sample
formed by bonding first and second substrates, and the
5 first and second substrates have different strengths.

100. A separating method of separating a composite
substrate which has a fragile layer between a first
substrate having a relatively low strength for
deflection and a second substrate having a relatively
10 high strength for deflection, at the fragile layer
comprising:


the separation step of ejecting a fluid to the
fragile layer to separate the composite substrate,

wherein in the separation step, the first
15 substrate is held to make a deflection amount due to a
pressure of the fluid injected into the composite
substrate relatively small and the second substrate is
held to make a deflection amount due to the pressure of
the fluid injected into the composite substrate
20 relatively large.

101. A separating method of separating a composite
substrate which has a fragile layer between a first
substrate having a relatively low strength for
deflection and a second substrate having a relatively
25 high strength for deflection, at the fragile layer
comprising:

THIS SHEET HAS BEEN
REPLACED





the separation step of ejecting a fluid to the fragile layer to separate the composite substrate,

wherein in the separation step, the first substrate is held to limit deflection due to a pressure
5 of the fluid injected into the composite substrate and the second substrate is held to allow deflection due to the pressure of the fluid injected into the composite substrate.

102. A substrate manufacturing method comprising the
10 step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate; and

15 separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of claims 81 to 92 is used in the separation step.

103. A substrate manufacturing method comprising:

20 bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate; and

separating the bonded substrates at the porous
25 layer,

wherein the separation step is executed using the

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 107 -

REPLACEMENT SHEET

16 MAR 1999

method of any one of claims 84 to 98.

104. A holding apparatus for holding a sample in
ejecting a fluid to a predetermined position in a
direction of thickness of the sample to separate the
5 sample, wherein the sample is held by a pair of holding
portions whose holding surfaces for holding the sample
have different shapes.

THIS SHEET HAS BEEN
REPLACED



* C L M S *



- 108 -


SAMPLE SEPARATING APPARATUS AND METHOD,
AND SUBSTRATE MANUFACTURING METHOD


ABSTRACT OF THE DISCLOSURE

This invention is to provide an apparatus for separating a substrate having a porous layer at the porous layer. A bonded substrate stack (101) having a
5 porous layer (101b) is supported by substrate holding portions (120, 150) while being rotated. High-speed, high-pressure water (jet) is ejected from a nozzle (102), so the jet is injected into the bonded substrate stack (101). The substrate holding portions (120, 150) hold
10 the bonded substrate stack (101) such that the bonded substrate stack (101) can expand at its central portion due to the pressure of the injected water. This efficiently applies a force (separation force) that acts outward from the inside of the bonded substrate stack
15 (101).

Figure 2

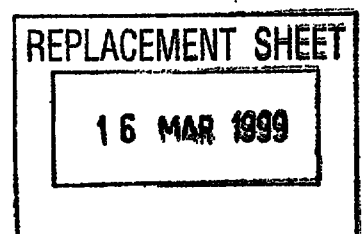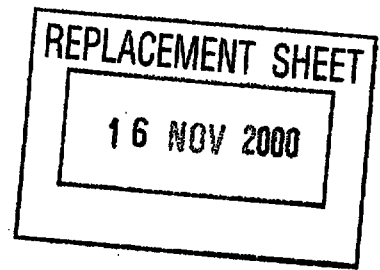THIS SHEET HAS BEEN
REPLACED





WHAT IS CLAIMED IS:

1. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

5 a jet unit for ejecting a fluid to the sample; and
a pair of holding portions opposing each other to sandwich and hold the sample,

wherein said pair of holding portions hold the sample to allow the sample to expand at a vicinity of
10 a central area of the major surface of the plate-like sample due to a pressure of the fluid ejected from said jet unit and injected into the sample.

2. A separating apparatus for separating a plate-like sample having an internal fragile layer at
15 the fragile layer comprising:

a jet unit for ejecting a fluid to the sample;
and


a pair of holding portions opposing each other to sandwich and hold the sample,

20 wherein said pair of holding portions hold the sample which can corrugate due to a pressure of the fluid ejected from said jet unit and injected into the sample.

3. The apparatus according to claim 1 or 2, wherein
25 at least one of said pair of holding portions has a hollow contact portion, and the sample is held by



1POS
9805839-9
16/11/00



bringing said contact portion into contact with the sample.

4. The apparatus according to claim 3, wherein said contact portion comprises a multiple of contact portions.

5 5. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.


10 6. The apparatus according to claim 5, wherein said contact portion comprises a multiple of contact portions.

7. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the
15 sample is held by bringing said contact portion into contact with the sample.

8. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of arcuated contact portions, and the sample
20 is held by bringing said contact portion into contact with the sample.

9. The apparatus according to claim 1 or 2, wherein at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main
25 body surface, and the sample is held by bringing said contact portion into contact with the sample.





10. The apparatus according to claim 1 or 2, wherein
at least one of said pair of holding portions has a
radial contact portion, and the sample is held by
bringing said contact portion into contact with the
5 sample.
11. The apparatus according to claim 1 or 2, wherein
at least one of said pair of holding portions has a
contact portion which comes into contact with a
peripheral portion of the sample, and the sample is held
10 by bringing said contact portion into contact with the
sample.
12. The apparatus according to claim 11, wherein said
contact portion can contact the whole peripheral portion
of the sample.
- 15 13. The apparatus according to any one of claims 1 to
12, further comprising a rotary mechanism for rotating
said holding portion about a shaft perpendicular to a
surface of the sample.
14. The apparatus according to any one of claims 1 to
20 13, further comprising an adjustment mechanism for
adjusting a distance between said pair of holding
portions.
15. The apparatus according to claim 14, wherein in
separating the sample by the fluid, said adjustment
25 mechanism presses the sample to adjust the distance
between said pair of holding portions.



16 NOV 2000

16. The apparatus according to claim 14, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant distance between said pair of holding portions.

5 17. The apparatus according to any one of claims 1 to 16, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

18. The apparatus according to any one of claims 1 to 17, wherein the sample comprises a substrate having a
10 porous layer as the fragile layer.

19. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

15 a pair of holding portions opposing each other to sandwich and hold the sample,

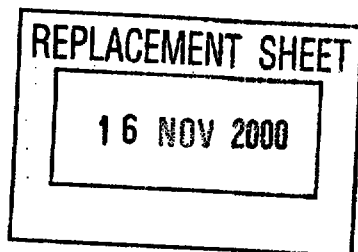
wherein said pair of holding portions hold the sample to allow the sample to expand at a vicinity of a central area of the major surface of the plate-like
20 sample due to a pressure of the fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample.

20. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a
25 plate-like sample having an internal fragile layer at the fragile layer comprising:

a pair of holding portions opposing each other to



* C L M S *



sandwich and hold the sample,

wherein said pair of holding portions hold the sample to allow the sample to corrugate due to a pressure of a fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample.

21. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has a hollow contact portion, and the sample is held by bringing said contact portion into contact with the sample.

22. The apparatus according to claim 21, wherein said contact portion comprises a multiple of contact portions.

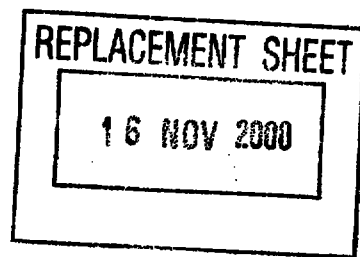
23. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has an annular contact portion, and the sample is held by bringing said contact portion into contact with the sample.

24. The apparatus according to claim 23, wherein said contact portion comprises a multiple of contact portions.

25. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or a plurality of stripe-shaped contact portions, and the sample is held by bringing said contact portion into contact with the sample.

26. The apparatus according to claim 19 or 20, wherein at least one of said pair of holding portions has one or





a plurality of arcuated contact portions, and the sample is held by bringing said contact portion into contact with the sample.

27. The apparatus according to claim 19 or 20, wherein
5 at least one of said pair of holding portions has one or a plurality of projecting contact portions on a main body surface, and the sample is held by bringing said contact portion into contact with the sample.

28. The apparatus according to claim 19 or 20, wherein
10 at least one of said pair of holding portions has a radial contact portion, and the sample is held by bringing said contact portion into contact with the sample.

29. The apparatus according to claim 19 or 20, wherein
15 at least one of said pair of holding portions has a contact portion which comes into contact with a peripheral portion of the sample, and the sample is held by bringing said contact portion into contact with the sample.

20 30. The apparatus according to claim 29, wherein said contact portion can contact the whole peripheral portion of the sample.

31. The apparatus according to any one of claims 19 to 30, further comprising a rotary mechanism for rotating
25 said holding portion about a shaft perpendicular to a surface of the sample.



16 NOV 2000

32. The apparatus according to any one of claims 19 to 31, further comprising an adjustment mechanism for adjusting a distance between said pair of holding portions.

5 33. The apparatus according to claim 32, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the distance between said pair of holding portions.

10 34. The apparatus according to claim 32, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant distance between said pair of holding portions.

15 35. The apparatus according to any one of claims 19 to 34, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

36. The apparatus according to any one of claims 19 to 35, wherein the sample comprises a substrate having a porous layer as the fragile layer.

20 37. A separating method of separating a plate-like sample having an internal fragile layer at the fragile layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 1 to 18;

25 separating the sample at the fragile layer by said separating apparatus; and

receiving the separated samples from said



separating apparatus.

38. The method according to claim 37, wherein water is used as the fluid to be ejected from said jet unit.

39. A separating method of separating a substrate at a
5 porous layer, the substrate being formed by bonding a non-porous layerside of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein said separating apparatus of any one of claims 1 to 18
10 is used for separation.

40. A substrate manufacturing method comprising the step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
15 layer are sequentially formed on one surface, to a second substrate; and

separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of
20 claims 1 to 18 is used in the separation step.

41. A separating apparatus for separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

a jet unit for ejecting a fluid to the sample; and
25 a pair of holding portions opposing each other to sandwich and hold the sample,



16 NOV 2000

wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts by a pressure of the fluid ejected from said jet unit and injected into the sample and simultaneously limit a
5 warp amount.

42. The apparatus according to claim 41, wherein at least one of said pair of holding portions has a smooth convex support surface, and the sample is held by said support surface.

10 43. The apparatus according to claim 42, wherein said support surface substantially comprises part of a spherical surface.

44. The apparatus according to claim 42, wherein said support surface comprises a surface formed by a cone
15 with a convex vertex.

45. The apparatus according to claim 42, wherein said support surface substantially comprises a surface formed by a frustum of a cone.

46. The apparatus according to claim 42, wherein said
20 support surface comprises a smooth convex surface formed by a stack of several frustums.

47. The apparatus according to claim 42, wherein said support surface comprises a convex surface formed by a stack of several columns.

25 48. The apparatus according to claim 41, wherein at least one of said pair of holding portions includes an



16 NOV 2000

- 96 -

elastic member and deforms due to a force inflicted by the sample.

49. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
5 partially consisting of an elastic material, and the sample is held by said support portion.

50. The apparatus according to claim 41, wherein at least one of said holding portions has an elastic member at a portion which can contact the sample.

10 51. The apparatus according to claim 41, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

52. The apparatus according to claim 41, wherein at least one of said holding portions has a support portion
15 coupled to a main body via an elastic member.

53. The apparatus according to any one of claims 41 to 52, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

20 54. The apparatus according to any one of claims 41 to 53, further comprising an adjustment mechanism for adjusting a distance between said pair of holding portions.

55. The apparatus according to claim 54, wherein in
25 separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the distance



16 NOV 2000

between said pair of holding portions.

56. The apparatus according to claim 54, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant distance
5 between said pair of holding portions.

57. The apparatus according to any one of claims 41 to 56, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

58. The apparatus according to any one of claims 41 to 10 57, wherein the sample comprises a substrate having a porous layer as the fragile layer.


59. A support apparatus for supporting a sample, which is used in a separating apparatus for separating a plate-like sample having an internal fragile layer at
15 the fragile layer comprising:

a pair of holding portions for sandwiching and holding the sample,

wherein said pair of holding portions allow the sample to warp as the sample is divided into two parts
20 by a pressure of the fluid ejected from a jet unit arranged in said separating apparatus and injected into the sample and simultaneously limit a warp amount.

60. The apparatus according to claim 59, wherein at least one of said pair of holding portions has a smooth
25 convex support surface, and the sample is held by said support surface.





61. The apparatus according to claim 60, wherein said support surface substantially comprises part of a spherical surface.
62. The apparatus according to claim 60, wherein said
5 support surface comprises a surface formed by a cone with a convex vertex.
63. The apparatus according to claim 60, wherein said support surface substantially comprises a surface formed by a frustum of a cone.
- 10 64. The apparatus according to claim 60, wherein said support surface comprises a smooth convex surface formed by a stack of several frustums.
65. The apparatus according to claim 60, wherein said support surface comprises a convex surface formed by a
15 stack of several columns.
66. The apparatus according to claim 59, wherein at least one of said pair of holding portions includes an elastic member and deforms due to a force inflicted by the sample.
- 20 67. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion partially consisting of an elastic material, and the sample is held by said support portion.
68. The apparatus according to claim 59, wherein at
25 least one of said holding portions has an elastic member at a portion which can contact the sample.



16 NOV 2000

- 99 -

69. The apparatus according to claim 59, wherein at least one of said holding portions has an annular support portion consisting of an elastic member.

70. The apparatus according to claim 59, wherein at least one of said holding portions has a support portion coupled to a main body via an elastic member.

71. The apparatus according to any one of claims 59 to 70, further comprising a rotary mechanism for rotating said holding portion about a shaft perpendicular to a surface of the sample.

72. The apparatus according to any one of claims 59 to 71, further comprising an adjustment mechanism for adjusting a distance between said pair of holding portions.

73. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism presses the sample to adjust the distance between said pair of holding portions.

74. The apparatus according to claim 72, wherein in separating the sample by the fluid, said adjustment mechanism maintains a substantially constant distance between said pair of holding portions.

75. The apparatus according to any one of claims 59 to 74, wherein each of said pair of holding portions has a chuck mechanism for vacuum-chucking the sample.

76. The apparatus according to any one of claims 59 to



* C L M S *

16 NOV 2000

- 100 -

75, wherein the sample comprises a substrate having a porous layer as the fragile layer.

77. A separating method of separating a plate-like sample having an internal fragile layer at the fragile
5 layer comprising the steps of:

transferring the sample to said separating apparatus of any one of claims 41 to 58;

separating the sample at the fragile layer by said separating apparatus; and

10 receiving the separated samples from said separating apparatus.

78. The method according to claim 77, wherein water is used as the fluid to be ejected from said jet unit.

79. A separating method of separating a substrate at a
15 porous layer, the substrate being formed by bonding a non-porous layer side of a first substrate, in which the porous layer and the non-porous layer are sequentially formed on one surface, to a second substrate, wherein
said separating apparatus of any one of claims 41

20 to 58 is used for separation.

80. A substrate manufacturing method comprising the step of:

bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous
25 layer are sequentially formed on one surface, to a second substrate; and



* C L M S *

16 NOV 2000

separating the bonded substrates at the porous layer,

wherein said separating apparatus of any one of claims 41 to 58 is used in the separation step.

5 81. A separating method of separating a plate-like sample having an internal fragile layer at the fragile layer comprising:

the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

10 wherein in the separation step, one surface of the sample is held to make a deflection amount due to a pressure of the fluid injected into the sample relatively small and the other surface of the sample is held to make a deflection amount due to the pressure of the fluid injected into the sample relatively large.

15 82. A separating method of separating a plate-like sample having an internal fragile layer at the fragile layer comprising:


the separation step of ejecting a fluid to the fragile layer of the sample to separate the sample,

20 wherein in the separation step, one surface of the sample is held to limit deflection due to a pressure of the fluid injected into the sample and the other surface of the sample is held to allow deflection due to the pressure of the fluid injected into the sample.

25 83. The method according to claim 81 or 82,



* C L M S *



further comprising rotating the sample about a shaft perpendicular to a major surface of the sample in separating the sample by the fluid.

84. The method according to any one of claims 81 to 83,
5 wherein the sample to be processed comprises a sample formed by bonding first and second substrates, and the first and second substrates have different strengths.


85. A separating method of separating a composite
10 substrate which has a fragile layer between a first substrate having a relatively low strength for deflection and a second substrate having a relatively high strength for deflection, at the fragile layer comprising:

the separation step of ejecting a fluid to the
15 fragile layer to separate the composite substrate,

wherein in the separation step, the first
substrate is held to make a deflection amount due to a pressure of the fluid injected into the composite substrate relatively small and the second substrate is
20 held to make a deflection amount due to the pressure of the fluid injected into the composite substrate relatively large.

86. A separating method of separating a composite
substrate which has a fragile layer between a first
25 substrate having a relatively low strength for deflection and a second substrate having a relatively





high strength for deflection, at the fragile layer comprising:

the separation step of ejecting a fluid to the fragile layer to separate the composite substrate,

5 wherein in the separation step, the first substrate is held to limit deflection due to a pressure of the fluid injected into the composite substrate and the second substrate is held to allow deflection due to the pressure of the fluid injected into the composite
10 substrate.

87. A substrate manufacturing method comprising:

 bonding a non-porous layer side of a first substrate, in which a porous layer and the non-porous layer are sequentially formed on one surface, to a
15 second substrate; and

 separating the bonded substrates at the porous layer,

 wherein the separation step is executed using the method of any one of claims 81 to 83.



**SAMPLE SEPARATING APPARATUS AND METHOD,
AND SUBSTRATE MANUFACTURING METHOD**

ABSTRACT OF THE DISCLOSURE

This invention is to provide an apparatus for separating a substrate having a porous layer at the porous layer. A bonded substrate stack (101) having a porous layer (101b) is supported by substrate holding portions (120, 150) while being rotated. High-speed, high-pressure water (jet) is ejected from a nozzle (102), so the jet is injected into the bonded substrate stack (101). The substrate holding portions (120, 150) hold the bonded substrate stack (101) such that the bonded substrate stack (101) can expand at its central portion due to the pressure of the injected water. This efficiently applies a force (separation force) that acts outward from the inside of the bonded substrate stack (101).

Figure 2

