

ABSTRACT

Lubricating Oil Compositions


A lubricating oil composition comprises 50 mass% or more of an oil of lubricating viscosity and 0.1 to 25 mass% of at least one of compounds of structures (I), (II) or (III):



(I)

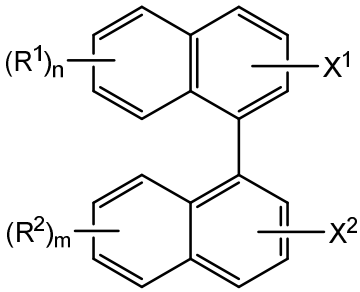

(II)



(III)

wherein X^1 and X^2 are the same or different and are OH, NH_2 or SH; wherein groups R^1 and R^2 are the same or different and are linear or branched, saturated or unsaturated hydrocarbon groups having from 1 to 50 carbon atoms, with the proviso that at least one of groups R^1 and R^2 has at least 4 carbon atoms; and wherein m and n are the same or different and are zero or an integer from 1 to 3 with the proviso that m and n are not both zero. The compositions are useful to ameliorate or prevent deposits in engines and provide good asphaltene dispersancy.

No figure