

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 September 2006 (21.09.2006)

PCT

(10) International Publication Number  
**WO 2006/098559 A1**

(51) International Patent Classification:  
**B65D 50/00** (2006.01) **B65D 50/02** (2006.01)

(21) International Application Number:  
PCT/KR2006/000764

(22) International Filing Date: 6 March 2006 (06.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10-2005-0021243 15 March 2005 (15.03.2005) KR  
10-2005-0027060 31 March 2005 (31.03.2005) KR  
10-2005-0034870 27 April 2005 (27.04.2005) KR  
10-2005-0050807 14 June 2005 (14.06.2005) KR

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: **RHO, Hee Kwon** [KR/KR]; #2-402 Solhyanggi Town, 544-1, Ilsan-ri, Mohyun-myun, Yongin, Kyeonggi-do, 449-855 (KR).

(74) Agent: **LEE, Sang-bum**; 5th Fl., Christine Bldg., 720-21, Yeoksam 2-dong, Gangnam-gu, Seoul, 135-920 (KR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHILD-RESISTANT CAP

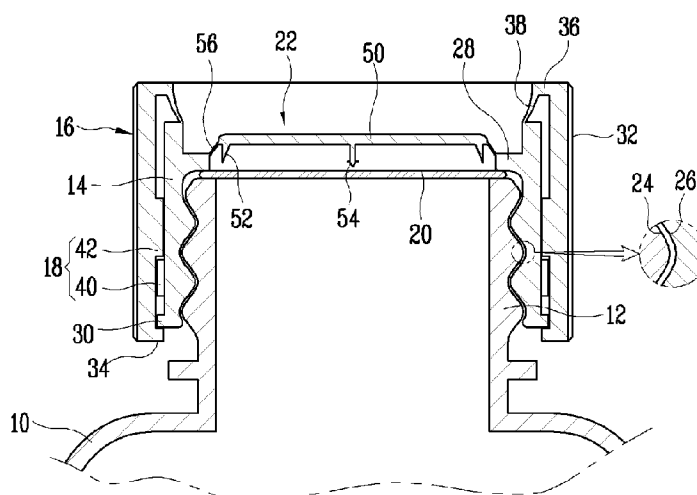

(57) Abstract: A child-resistant cap comprises: an inner cap mounted at a vessel inlet of a vessel; an outer cap disposed at an outer circumferential surface of the inner cap so as to perform an idling with the inner cap; a rotation force transmitting portion disposed between the inner cap and the outer cap for transmitting a rotation force of the outer cap to the inner cap only when the outer cap is downwardly moved with a force more than a certain degree; and a sealing member removing unit formed at the inner cap for removing a sealing member sealed at the vessel inlet when the inner cap is detached from the vessel inlet, and storing the removed sealing member in the inner cap. Since the sealing member removing unit is integrally formed at the cap, the sealing member is automatically removed at the time of opening the cap. Accordingly, the sealing member needs not to be additionally removed, and thus a usage convenience is enhanced. Furthermore, under a construction that the outer cap maintains an upwardly moved position from the inner cap by an elastic force, the cap can be opened only by downwardly moving the outer cap with a force more than a certain degree. Accordingly, a child can be more effectively protected.

WO 2006/098559 A1