

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)


PCT

(10) International Publication Number
WO 00/72127 A1

- (51) International Patent Classification⁷: G06F 3/03, 3/033, B41F 31/08, B41L 27/10, B41J 2/21
- (21) International Application Number: PCT/AU00/00561
- (22) International Filing Date: 24 May 2000 (24.05.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 0559 25 May 1999 (25.05.1999) AU
PQ 1313 30 June 1999 (30.06.1999) AU
PQ 3632 25 October 1999 (25.10.1999) AU
- (71) Applicant (for all designated States except US): SILVERBROOK RESEARCH PTY. LTD. [AU/AU]; 393 Darling Street, Balmain, NSW 2041 (AU).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SILVERBROOK, Kia [AU/AU]; Silverbrook Research Pty. Ltd., 393 Darling Street, Balmain, NSW 2041 (AU). LAPSTUN, Paul [NO/AU]; 13 Duke Avenue, Rodd Point, NSW 2046 (AU).
- (74) Agent: SILVERBROOK RESEARCH PTY. LTD.; 393 Darling Street, Balmain, NSW 2041 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: INTERACTIVE PRINTER

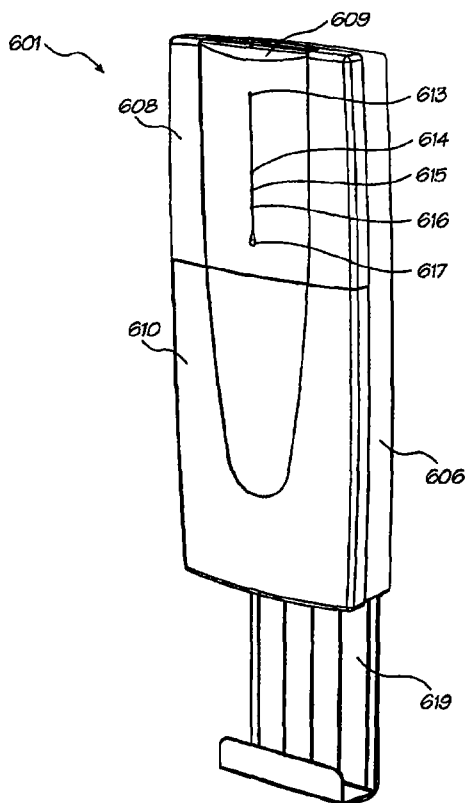

(57) Abstract: A printer for printing a second interface onto a second surface, in response to first indicating data received from a sensing device in the form of a stylus. The first indicating data is sensed by the stylus from first coded data. A first interface is disposed on a first surface, and includes the first coded data. The printer includes an input module and a printing module. The input module is configured to receive the first indicating data from the stylus, the first indicating data being at least partially indicative of response data. The input module generates second indicating data based on the first indicating data, the second indicating data being at least partially indicative of the response data. The second indicating data is sent to a computer system. The printing module includes a printing mechanism configured to receive the response data from the computer system. The second interface is based at least partially on the response data. The printing module then prints the second interface onto the second surface using the printing mechanism.



G00001

WO 00/72127 A1



162162

patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*