



- (51) International Patent Classification:
B29C 45/22 (2006.01) *B29C 45/17* (2006.01)
B29C 45/77 (2006.01)
- (21) International Application Number:
PCT/SG2012/000307
- (22) International Filing Date:
31 August 2012 (31.08.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
1205091.0 23 March 2012 (23.03.2012) GB
- (71) Applicant (for all designated States except US): **MEIBAN INTERNATIONAL PTE LTD** [SG/SG]; 11 Ubi Road 1, Meiban Industrial Building, Singapore 408723 (SG).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GOH, Carol** [SG/SG]; Meiban International Pte Ltd, 11 Ubi Road 1, Meiban Industrial Building, Singapore 408723 (SG). **TO-**


DESCO, Pierre, Louis [SG/SG]; Meiban International Pte Ltd, 11 Ubi Road 1, Meiban Industrial Building, Singapore 408723 (SG). **LIM, Chee, Beng** [SG/SG]; Meiban International Pte Ltd, 11 Ubi Road 1, Meiban Industrial Building, Singapore 408723 (SG).

(74) Common Representative: **MEIBAN INTERNATIONAL PTE LTD**; c/o NG, Jason, 11 Ubi Road 1, Meiban Industrial Building, Singapore 408723 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: SELF-BALANCING HOT RUNNER WITH INDEPENDENT FLOW AND PRESSURE CONTROL

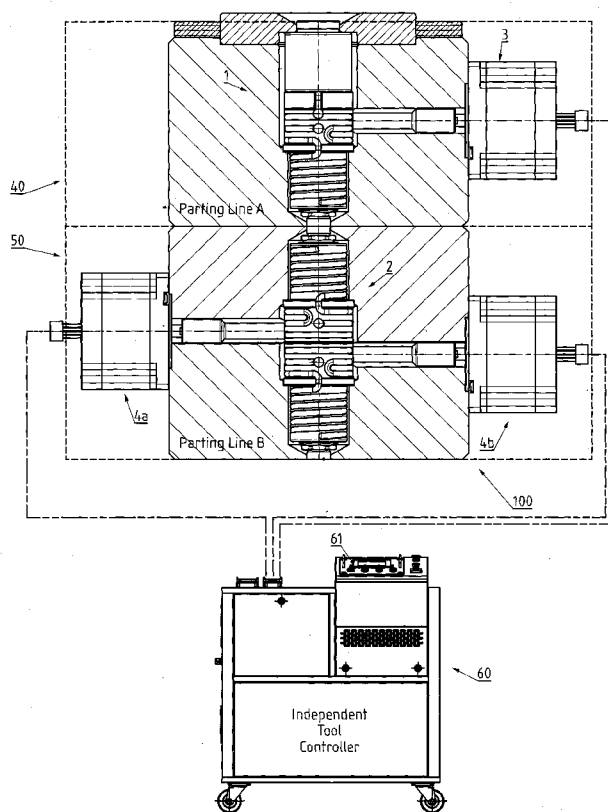

(57) Abstract: The present invention relates to a method for use in injection molding with the capability to have precise and adjustable control of the molten plastic flow when molding at least two (2) non- identical (i.e. with more than 50% difference in weight or form) or identical complex-shaped and intricate plastic parts at the same time, utilising a mold with at least two (2) parting layers via a standard conventional injection machine. This invention incorporates the principle of having two (2) valve pins in which their movements are back-to-back and can be independently opened and closed as controlled by stepper, servo or linear motors linked to a separate independent tool controller. The two (2) valve pins are positioned at the floating half of the mold for sequential, stack or multi-layer mold with multiple cavities.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*