




- | | |
|---|---|
| <p>(51) International Patent Classification:
 <i>B66F 9/06</i> (2006.01) <i>B62B 5/02</i> (2006.01)
 <i>B66B 1/18</i> (2006.01)</p> <p>(21) International Application Number:
 PCT/NL2010/050196</p> <p>(22) International Filing Date:
 15 April 2010 (15.04.2010)</p> <p>(25) Filing Language: Dutch</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
 2002749 15 April 2009 (15.04.2009) NL</p> <p>(71) Applicant (for all designated States except US): VAN DER HELM PIJNACKER TRACTOREN [NL/NL];
 Henricuskade 23, NL-2497 NB Den Haag (NL).</p> <p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): VAN DER HELM, Hermanus Cornelis [NL/NL]; Zomereik 21, NL-2498 BS Den Haag (NL).</p> | <p>(74) Agent: KETELAARS, Maarten; J.W. Frisolaan 13, NL-2517 JS The Hague (NL).</p> <p>(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.</p> <p>(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).</p> |
|---|---|

[Continued on next page]

- (54) Title:** LIFT HAND TRUCK

Fig 1

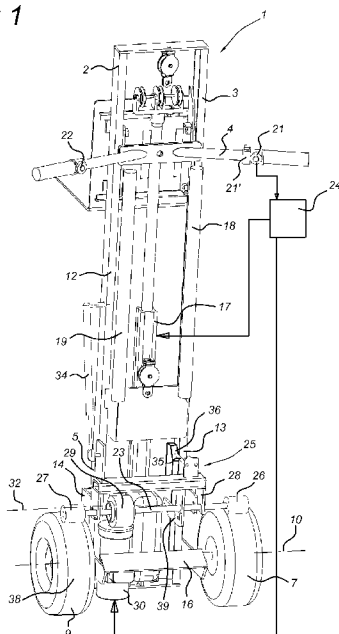

(57) Abstract: Hand truck with a frame provided with a substantially vertical guide, two wheels which are situated near the bottom side of the guide and which are rotatable about a transverse shaft, a handle which is situated near the upper side of the guide, a lifting device comprising a lifting element which is displaceable along the guide and a lifting drive which is connected to the lifting element for displacing the lifting element, a motor for driving the wheels and a brake cooperating with the wheels for blocking the rotation of the wheels, in which a control device is provided which can be operated via the handle for switching the lifting drive and the motor on and off, characterized in that, in a lower driving position of the lifting element, the brake is released and, when the lifting element is moved from the lower driving position to a lifting position, the brake is engaged, in which case the wheels can be driven via the motor at a positioning speed.



Published:

— *with international search report (Art. 21(3))*