




(43) International Publication Date
27 February 2014 (27.02.2014)

- | | |
|--|---|
| (51) International Patent Classification:
<i>B63B 21/50</i> (2006.01) <i>B63B 22/02</i> (2006.01) | (81) Designated States (<i>unless otherwise indicated, for every kind of national protection available</i>): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW. |
| (21) International Application Number:
PCT/SE2013/050941 | (84) Designated States (<i>unless otherwise indicated, for every kind of regional protection available</i>): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG). |
| (22) International Filing Date:
30 July 2013 (30.07.2013) | Published:
— <i>with international search report (Art. 21(3))</i> |
| (25) Filing Language:
Swedish | |
| (26) Publication Language:
English | |
| (30) Priority Data:
1250952-7 24 August 2012 (24.08.2012) SE | |
| (71) Applicants: STENA REDERI AB [SE/SE]; Danmarksterminalen, SE-405 19 Göteborg (SE). REMORA AS [NO/NO]; Kongs gate 10, N-4005 Stavanger (NO). | |
| (72) Inventors: ROBERTSSON, Harry; Skärvallsgatan 6, SE-427 69 Västra Frölunda (SE). HELLESMARK, Svein B.; Tykkåsen 56, N-SE-4870 Fevik (NO). | |
| (74) Agent: CEGUMARK AB; P O Box 53047, SE-400 14 Göteborg (SE). | |

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD OF MOORING OF SHIP AND ARRANGEMENT TO ACCOMPLISH THE METHOD

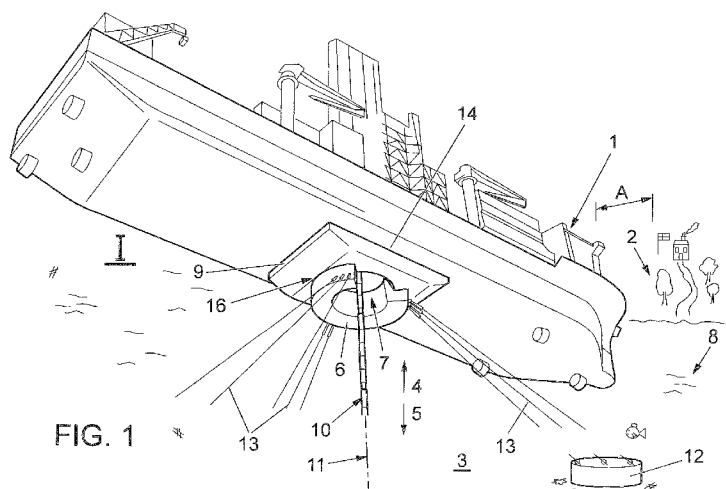

(57) Abstract: The invention relates both to a method and to an arrangement of accomplishing mooring of ship in a definite position at a distance from land and with possibility to make the ship leave the moorage, and also to be able to return exactly to the same place later. The mooring is accomplished by means of a substantially ring-shaped mooring unit (6), which can be raised (4) and lowered (5) and which has a gap (7) along its periphery, which can be connected to (I) and disconnected from (II) the ship (1), respectively, by means of a connectable part (9) located below the surface of the water (8). Said mooring unit (6) makes it possible for the ship (1), with downwards protruding load (10) supported by the ship (1), to pass by after disconnection and lowering of said mooring unit (6), and to be rotated round an essentially vertical imaginary axis (11).