



- (51) International Patent Classification:
G01C 23/00 (2006.01) *G06Q 10/06* (2012.01)
- (21) International Application Number:
PCT/US2013/026733
- (22) International Filing Date:
19 February 2013 (19.02.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/442,564 9 April 2012 (09.04.2012) US
- (71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, IL 60606-2016 (US).
- (72) Inventors; and
- (71) Applicants : **SMAILUS, Thomas, O.** [US/US]; 2760 160th Ave SE, MC 7L-44, Bellevue, WA 98008-0000 (US). **LAFEVER ROSMAN, Monica, C.** [US/US]; 2760 160th Ave SE, MC 7L-44, Bellevue, WA 98008-0000 (US).
- (74) Agents: **SATERMO, Eric, K** et al.; The Boeing Company, PO Box 2515, MC 110-SD54, Seal Beach, CA 90740-1515 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IDENTIFYING AND CONFIGURING CONTROLS ON A CONTROL PANEL

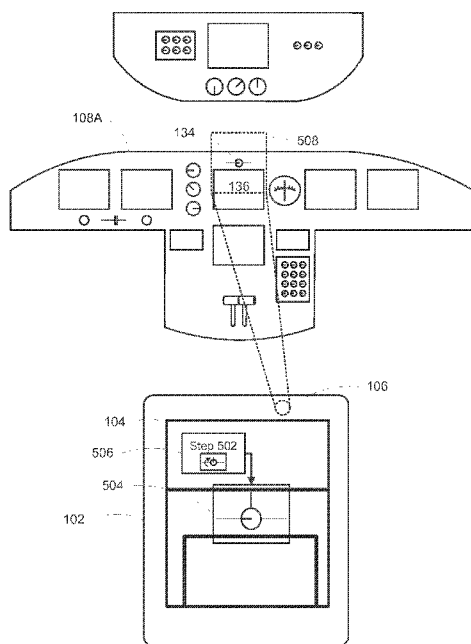


FIG. 5A

(57) Abstract: A method includes receiving, at a processor from a camera, image data associated with a control panel. The method also includes presenting one or more images at a display. The one or more images are generated based on the image data. The method includes determining a location of a first control of the control panel based on the image data and based on control settings data. The method includes providing an indication of the location of the first control at the display, and providing an indication of a desired configuration of the first control at the display.



Declarations under Rule 4.17:

Published:

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* — *with international search report (Art. 21(3))*