

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)

PCT

(10) International Publication Number
WO 2004/043652 A3

(51) International Patent Classification⁷: **B25B 23/14**

(21) International Application Number:
PCT/US2003/035925

(22) International Filing Date:
12 November 2003 (12.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/425,906 12 November 2002 (12.11.2002) US

(71) Applicant (for all designated States except US): **ENTE-GRIS, INC.** [US/US]; 3500 Lyman Boulevard, Chaska, MN 55318 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STOICK, Michael**

[US/US]; 17194 Toronto Avenue SE, Prior Lake, MN 55372 (US). **CADAVID, Carlos** [US/US]; 8039 Dakota Lane, Chanhassen, MN 55378 (US).


(74) Agents: **CHRISTENSEN, Douglas, J.** et al.; Patterson, Thuente, Skaar & Christensen, P.A., 4800 IDS Center, 80 South Eight Street, Minneapolis, MN 55402-2100 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: **BREAKAWAY TORQUE WRENCH**

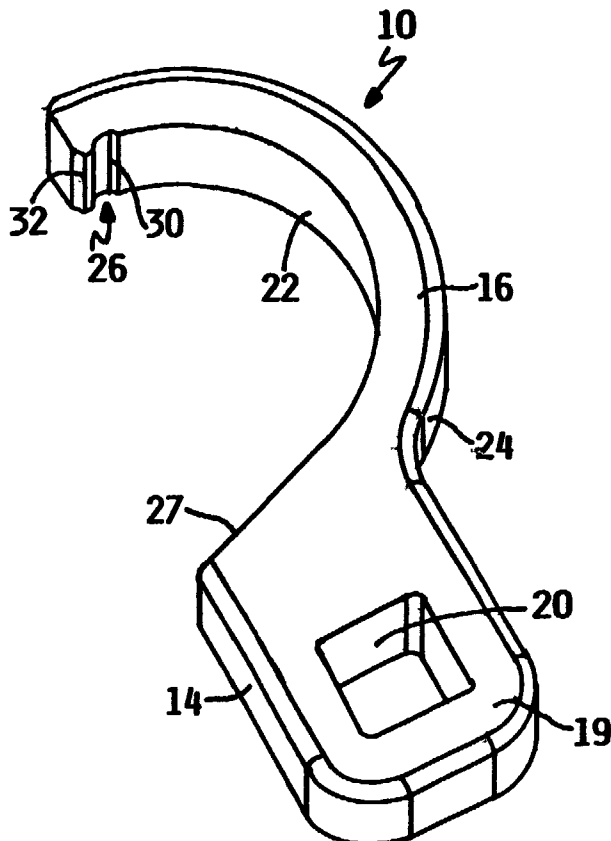

(57) Abstract: The breakaway torque wrench (10) generally includes a handle portion (14) and an arcuate engagement portion (16). The arcuate engagement portion (16) further includes at least one engagement tooth portion (26) proximate one end of the arcuate engagement portion (16) for securable releasable engagement with an axial grooved fastener (12) or object. The breakaway torque wrench (10) is engageable and capable of disengagement at predefined torque levels without implementing complex and vulnerable mechanical designs of conventional practice.



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

1 July 2004