

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
20 June 2002 (20.06.2002)


PCT

(10) International Publication Number
WO 02/47866 A1

- (51) International Patent Classification⁷: **B23P 19/02**
- (21) International Application Number: PCT/US01/45359
- (22) International Filing Date: 4 December 2001 (04.12.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/255,374 15 December 2000 (15.12.2000) US
- (71) Applicant (for all designated States except US): **PEM MANAGEMENT, INC.** [US/US]; Suite 900, 9th Floor, 300 Delaware Avenue, Wilmington, DE 19801 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SWANSTROM, Kenneth, A.** [US/US]; 2968 Mill Road, Doylestown, PA 18901 (US). **ROSS, Harold, D.** [US/US]; 132 Bates Drive, Chalfont, PA 18914 (US). **MCDONOUGH, William, P.** [US/US]; 23 College Avenue, Collegeville, PA 19426 (US).
- (74) Agent: **GORE, Gregory, J.**; Suite 316, 70 West Oakland Avenue, Doylestown, PA 18901 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declarations under Rule 4.17:**
- of inventorship (Rule 4.17(iv)) for US only
 - of inventorship (Rule 4.17(iv)) for US only
 - of inventorship (Rule 4.17(iv)) for US only
- Published:**
- with international search report

[Continued on next page]

(54) Title: RESILIENT STANDOFF FASTENER

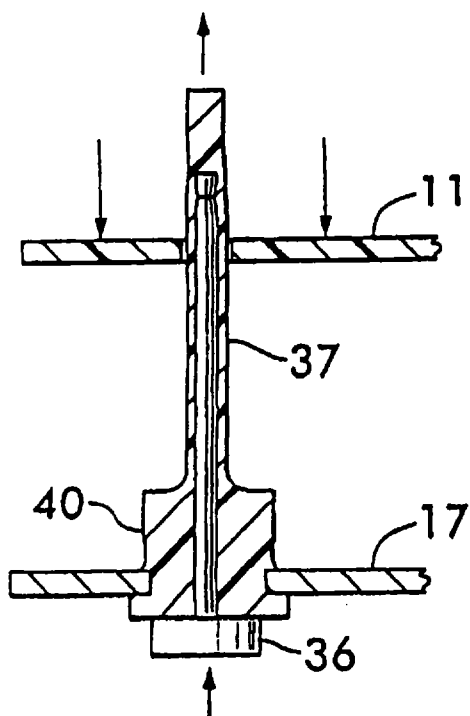

(57) Abstract: An elongate, elastomeric fastener (13, 19) includes a head (13) and barrel section (19). The fastener may be installed into a hole (12) in a panel (11) by stretching by the elastomeric, elongated portion reducing diameter so that it passes through the hole (12) and fastens by releasing the force on the fastener (13, 19) allowing gripping around the hole (12). In yet a further embodiment, a central push-pin (35) may be used to apply an axial force on the fastener which is required to operate the fastener (13, 19).




162162

WO 02/47866 A1

42

WO 02/47866 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.