



- (51) International Patent Classification:
B66C 1/66 (2006.01) *B65D 90/00* (2006.01)
- (21) International Application Number:
PCT/IB2014/060517
- (22) International Filing Date:
8 April 2014 (08.04.2014)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:
BE201300255 9 April 2013 (09.04.2013) BE
- (72) Inventor; and
(71) Applicant : VANCAMPEN, Tim [BE/BE]; Schuttershof
25, B-2590 Berlaar (BE).
- (74) Agent: VAN HUNSEL, Lieven; P.O. Box 34, B-2900
Schoten (BE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: CORNER PIECE FOR FORMING A CORNER OF A CONTAINER, CONTAINER PROVIDED WITH SUCH CORNER PIECE, AND GRIPPER ARM AND GRIPPER WHICH CAN COOPERATE WITH SUCH CORNER PIECES

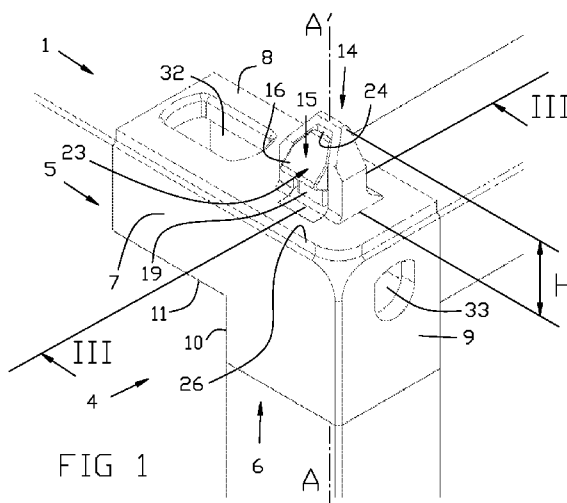

(57) Abstract: Corner piece (1) for forming a corner (2) of a container (3), with a hold (32,50) which can be grabbed by external gripping means (45,51), stacking means (14) in the shape of a solid protrusion (14) and coupling means (15) which can be activated and deactivated and which comprise a movable coupling element (16) which can be moved between an activated position and a deactivated position, as well as an activator mechanism (18) for activating and deactivating the coupling means (15), which activator mechanism (18) can be coupled to external driving means (46).

