



(51) International Patent Classification:
A47J 37/06 (2006.01)

(21) International Application Number:
PCT/BE2013/000019

(22) International Filing Date:
18 April 2013 (18.04.2013)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
2012/0263 20 April 2012 (20.04.2012) BE

(72) Inventor; and

(71) Applicant : PITTEURS, Benny Marcelinus Lydie
[BE/BE]; Zeedijk 78/901, B-8660 De Panne (BE).

(74) Agent: D'HALLEWEYN, Nele Veele Trees Gertrudis;
Arnold & Siedsma, Meir 24, B-2000 Antwerpen (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: COOKING APPARATUS AND METHOD FOR CONTROLLING A COOKING APPARATUS

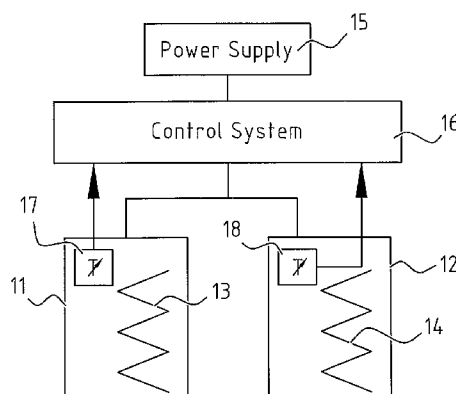


FIG. 1

(57) Abstract: Cooking apparatus comprising at least one baking mould (11, 12) with a first (13) and a second (14) heating element; and a control system (16) configured to control the power supply to the first (13) and the second (14) heating element, wherein the control system (16) is configured to provide the first heating element (13) with a first electric power, while the second heating element (14) is provided with a second electric power which differs from the first electric power, wherein the first and the second electric power lie in a range from zero to a determined maximum electric power.